

HERMETIC EQUIPMENT

- AQUANT IP 55
- AQUANT IP 65
- HERMES
- HERMES 2







Surface-mounted sockets and switches with increased resistance to water and dust

- degree of protection IP 55/65
- robust construction
- innovative sealing of connector and socket
- durable mechanism with proven design
- wide range of connectors with a card holder for circuit description
- 16A sockets (threaded terminals)
10AX connectors (threaded terminals)
- sockets of French type or schuko
- increased resistance to UV rays
- impact resistance in degree IK 07
- ABS + TPE material
- working temperature range -25°C to + 70°C
- housing color light gray RAL 7035
- flap color gray RAL 7043
- double and triple socket sets in one base
- available socket combinations with switch
- can be configured in horizontal and vertical sets





IP65

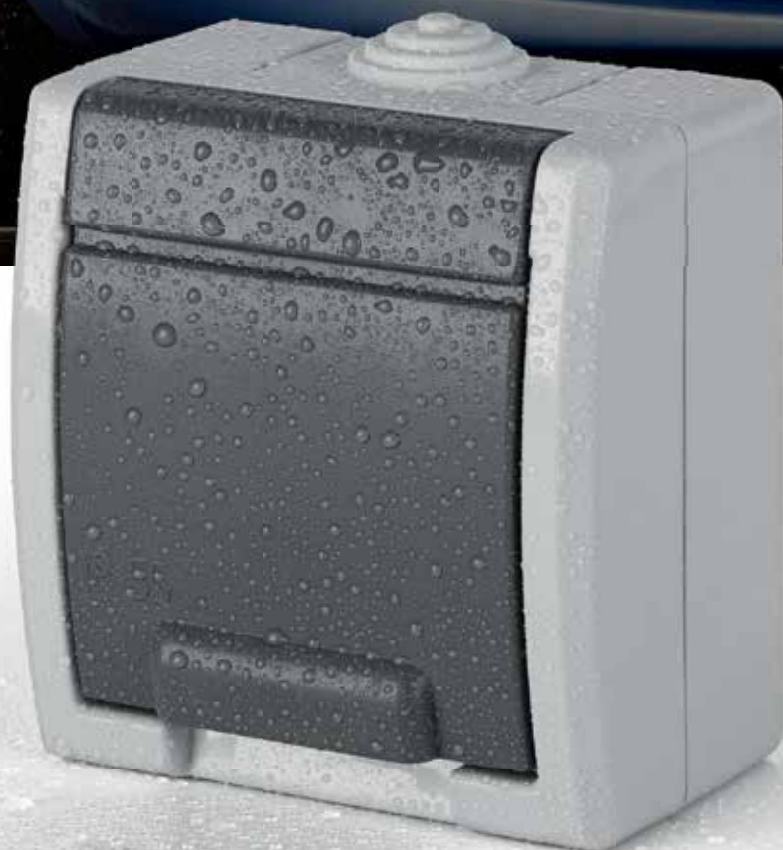

Application:

- logistics halls
- garage halls
- industrial plants
- laundries, basements
- machine industry

Advantages:

- durable sealing thanks to 2-component technology
- dust and water flow will not disturb the Aquant™ Series fittings
- sealed housing
- flexible membrane constituting a specific barrier between external elements (keys and flaps) and the internal electrical component
- additional protection integrated with the base in the form of movable glands rubber



IP 55 IK 07 ABS TPE



AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	Casing Grey RAL 7035	10	1,52	1201-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP55
Description label.
Dimension: 76mm x 81mm x 56mm





IP 55 IK 07 ABS TPE



AQUANT IP 55 DOUBLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	Casing Grey RAL 7035	10	1,52	1202-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP55
Description label.
Dimension: 76mm x 81mm x 56mm





IP 55 IK 07 ABS TPE



AQUANT IP 55 TWO POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2	Casing Grey RAL 7035	10	1,52	1203-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP55
Description label.
Dimension: 76mm x 81mm x 56mm





IP 55 IK 07 ABS TPE



AQUANT IP 55 PUSH „LIGHT” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	Casing Grey RAL 7035	10	1,52	1204-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP55
Description label.
Dimension: 76mm x 81mm x 56mm





IP 55 IK 07 ABS TPE



AQUANT IP 55 PUSH „BELL” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	Casing Grey RAL 7035	10	1,52	1205-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP55
Description label.
Dimension: 76mm x 81mm x 56mm





IP 55 IK 07 ABS TPE



AQUANT IP 55 CROSSED SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	Casing Grey RAL 7035	10	1,52	1206-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
 Switches: 10AX/250V- screw terminals
 Protection Degree IP55
 Description label.
 Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP55 PUSH „KEY” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-8	Casing Grey RAL 7035	10	1,52	1207-10
	Button Grey RAL 7043			

Button with pictogram „key”
 NORM: PN-EN-60669-1:2006
 Switches: 10AX/230V- screw terminals
 Protection Degree IP55
 Description label.
 Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE




AQUANT IP55 JALOUSIE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-8	Casing Grey RAL 7035	10	1,52	1208-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
 Switches: 10AX/230V- screw terminals
 Protection Degree IP55
 Description label.
 Dimension: 76mm x 81mm x 56mm



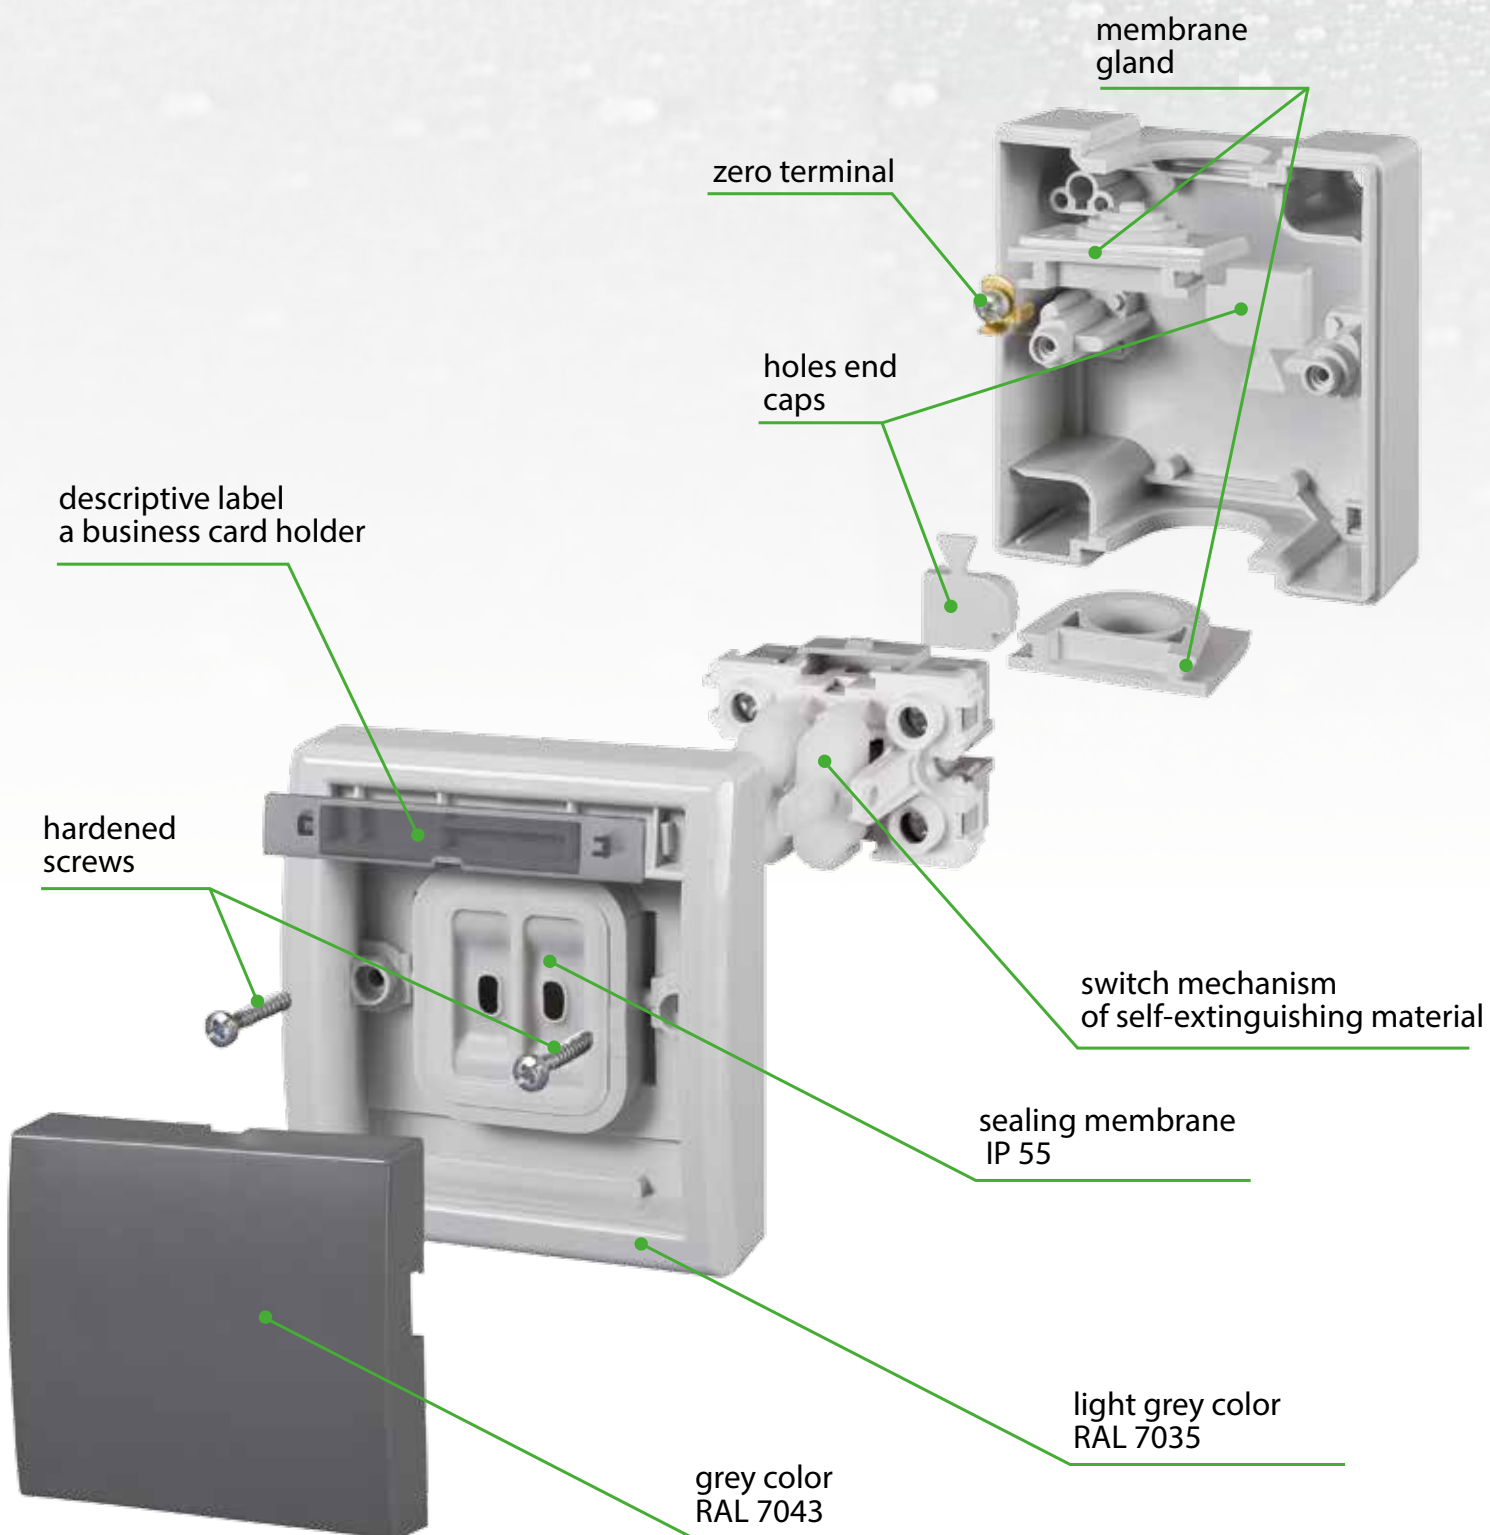


IP 55 IK 07 ABS TPE



AQUANT IP 55 SOCKET 2P+Z

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	Casing Grey RAL 7035	10	1,50	1241-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP55
Dimension: 76mm x 81mm x 56mm

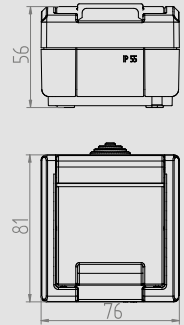


IP 55 IK 07 ABS TPE



AQUANT IP 55X2P+Z SOCKET HORIZONTAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z H	Casing Grey RAL 7035	10	2,50	1242-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2x2P+Z
Protection Degree IP55
Dimension: 153mm x 81mm x 56mm

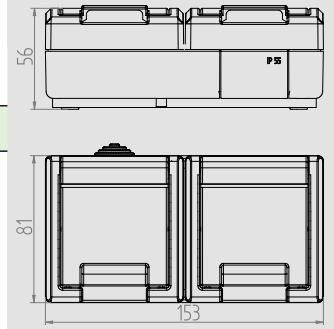


IP 55 IK 07 ABS TPE



AQUANT IP 55 2X2P+Z SOCKET VERTICAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z V	Casing Grey RAL 7035	10	2,50	1252-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2x2P+Z
Protection Degree IP55
Dimension: 76mm x 163mm x 57mm

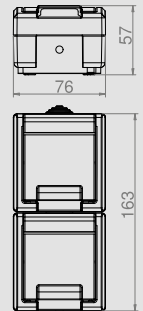


IP 55 IK 07 ABS TPE



AQUANT IP 55 3X2P+Z SOCKET HORIZONTAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z H	Casing Grey RAL 7035	4	1,60	1243-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 3x2P+Z
Protection Degree IP55
Dimension: 230mm x 81mm x 58mm

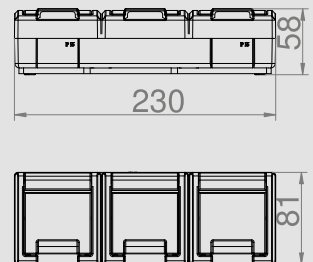



IP 55 IK 07 ABS TPE



AQUANT IP 55 2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	Casing Grey RAL 7035	10	1,50	1244-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP55
Dimension: 76mm x 81mm x 56mm





IP 55 IK 07 ABS TPE



AQUANT IP 55 2X2P+Z SCHUKO SOCKET HORIZONTAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z H schuko	Casing Grey RAL 7035	10	2,50	1245-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP55
Dimension: 153mm x 81mm x 56mm

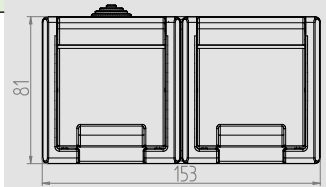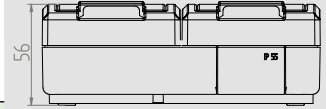



IP 55 IK 07 ABS TPE



AQUANT IP 55 2X2P+Z SCHUKO SOCKET VERTICAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z V schuko	Casing Grey RAL 7035	10	2,50	1254-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP55
Dimension: 76mm x 163mm x 57mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 3X2P+Z SCHUKO SOCKET HORIZONTAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z H schuko	Casing Grey RAL 7035	4	1,60	1246-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP55
Dimension: 230mm x 81mm x 58mm



IP 55 IK 07 ABS TPE




AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH + 2P+Z SOCKET HORIZONTAL

AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH + 2P+Z SOCKET VERTICAL

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2P+Z H	RAL 7035+RAL 7043 (szary)	10	2,50	1247-10*
ŁNT-1+GNT 2P+Z V	RAL 7035+RAL 7043 (szary)	10		1256-10*

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP55
Dimension: 153mm x 81mm x 56mm

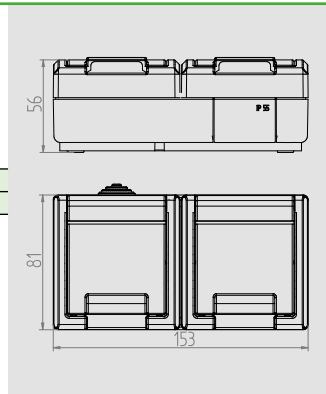

IP 55 IK 07 ABS TPE




AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH + 2X2P+Z SOCKET HORIZONTAL

AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH + 2X2P+Z SOCKET VERTICAL

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2x2P+Z H	RAL 7035+RAL 7043 (szary)	4	1,60	1249-10*
ŁNT-1+GNT 2x2P+Z V	RAL 7035+RAL 7043 (szary)	4		1262-10*



NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP55
Dimension: 230mm x 81mm x 58mm

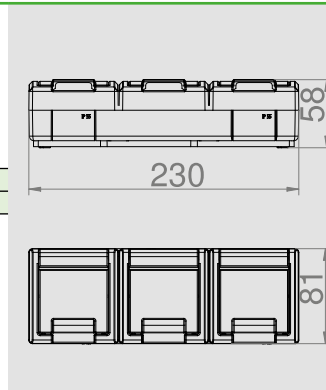

AQUANT ADAPTER FOR VERTICAL CONNECTION OF SOCKETS AND SWITCHES

Type	Color	Pack. pc.	Weight pc./kg	Index
Adapter	Szary RAL 7035	5	1,085	1280-10


Adapter for vertical connection of sockets and switches of AQUANT sockets and switches

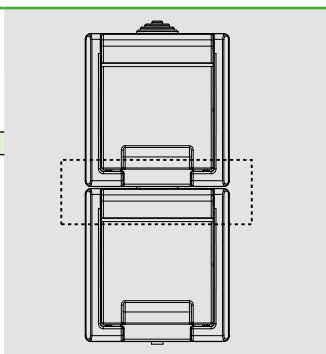

AQUANT CABLE GLANDS

Type	Color	Pack. pc.	Weight pc./kg	Index
Glands	Szary RAL 7035	10	1,085	1281-10

Cable glands



*on individual customer's order, extended waiting period


IP 65 IK 07 ABS TPE



AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	Casing Grey RAL 7035	8	1,52	1201-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP 65
Description label.
Dimension: 76mm x 81mm x 56mm

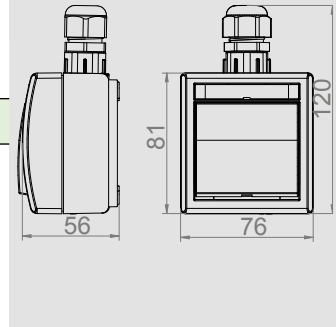


IP 65 IK 07 ABS TPE



AQUANT IP 65 DOUBLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	Casing Grey RAL 7035	8	1,52	1202-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP 65
Description label.
Dimension: 76mm x 81mm x 56mm

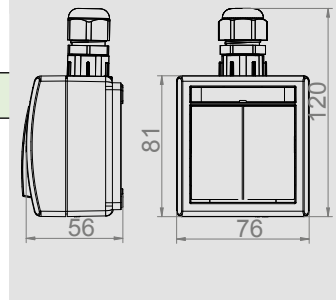


IP 65 IK 07 ABS TPE



AQUANT IP 65 TWO POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2	Casing Grey RAL 7035	8	1,52	1203-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP 65
Description label.
Dimension: 76mm x 81mm x 56mm

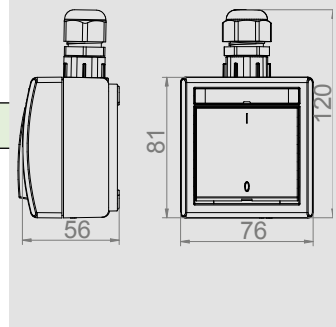


IP 65 IK 07 ABS TPE



AQUANT IP 65 PUSH „LIGHT” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	Casing Grey RAL 7035	8	1,52	1204-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP 65
Description label.
Dimension: 76mm x 81mm x 56mm

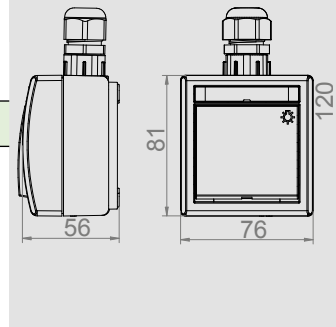


IP 65 IK 07 ABS TPE



AQUANT IP 65 PUSH „BELL” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	Casing Grey RAL 7035	8	1,52	1205-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP 65
Description label.
Dimension: 76mm x 81mm x 56mm

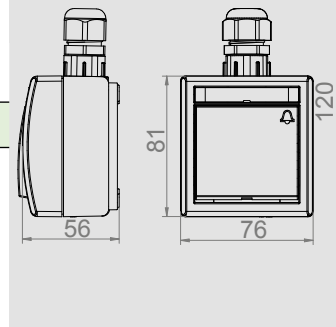


IP 65 IK 07 ABS TPE



AQUANT IP 65 CROSSED SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	Casing Grey RAL 7035	10	1,52	1206-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V- screw terminals
Protection Degree IP 65
Description label.
Dimension: 76mm x 81mm x 56mm

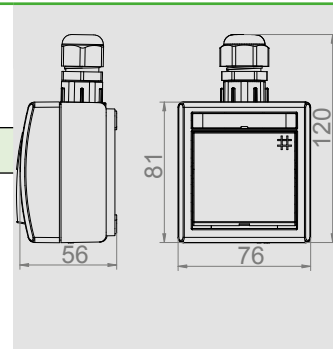


IP 65 IK 07 ABS TPE



AQUANT IP 65 PUSH „KEY” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-8	Casing Grey RAL 7035	10	1,52	1207-65
	Button Grey RAL 7043			

Button with pictogram „key”.
NORM: PN-EN-60669-1:2006
Switches: 10AX/230V- screw terminals
Protection Degree IP 65
Description label.
Dimension: 76mm x 81mm x 56mm

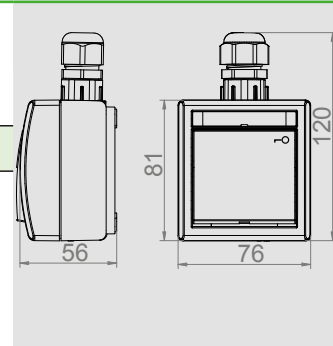


IP 65 IK 07 ABS TPE



AQUANT IP 65 JALOUSIE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-8	Casing Grey RAL 7035	10	1,52	1208-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V- screw terminals
Protection Degree IP 65
Description label.
Dimension: 76mm x 81mm x 56mm

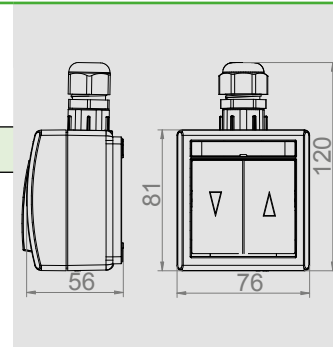


IP 65 IK 07 ABS TPE



AQUANT IP 65 2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	Casing Grey RAL 7035	8	1,50	1241-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP 65
Dimension: 76mm x 81mm x 56mm

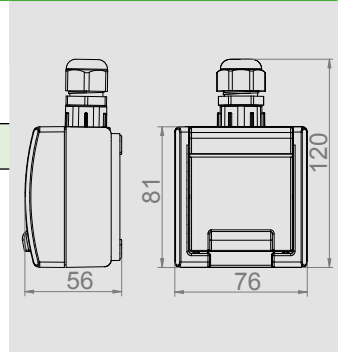


IP 65 IK 07 ABS TPE



AQUANT IP 65 2X2P+Z SOCKET HORIZONTAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z H	Casing Grey RAL 7035	4	2,50	1242-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2x2P+Z
Protection Degree IP 65
Dimension: 153mm x 81mm x 56mm

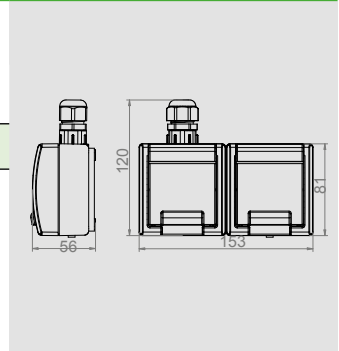


IP 65 IK 07 ABS TPE



AQUANT IP 65 2X2P+Z SOCKET VERTICAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z V	Casing Grey RAL 7035	4	2,50	1252-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2x2P+Z
Protection Degree IP 65
Dimension: 76mm x 163mm x 57mm

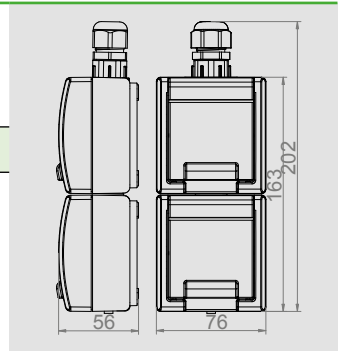


IP 65 IK 07 ABS TPE



AQUANT IP 65 3X2P+Z SOCKET HORIZONTAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z H	Casing Grey RAL 7035	3	1,60	1243-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 3x2P+Z
Protection Degree IP 65
Dimension: 230mm x 81mm x 58mm

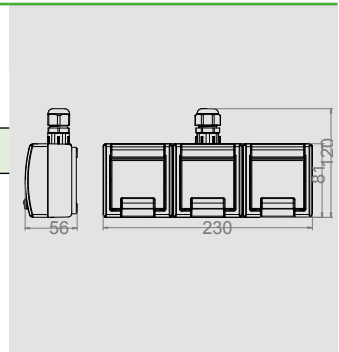


IP 65 IK 07 ABS TPE



AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH + 2P+Z SOCKET HORIZONTAL
AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH + 2P+Z SOCKET VERTICAL

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2P+Z H	RAL 7035+RAL 7043 (szary)	4	2,50	1247-65*
ŁNT-1+GNT 2P+Z V	RAL 7035+RAL 7043 (szary)			1256-65*

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP 65
Dimension: 153mm x 81mm x 56mm

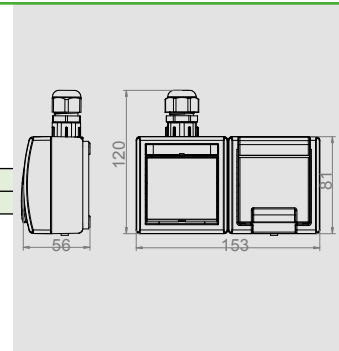


IP 65 IK 07 ABS TPE



AQUANT IP 65 2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	Casing Grey RAL 7035	8	1,50	1244-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP 65
Dimension: 76mm x 81mm x 56mm

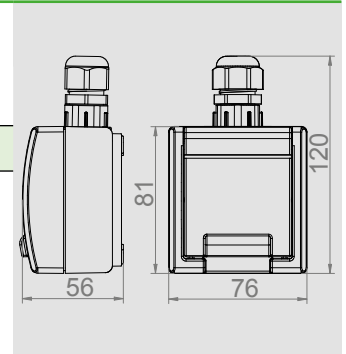

IP 65 IK 07 ABS TPE



AQUANT IP 65 2X2P+Z SCHUKO SOCKET HORIZONTAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z H schuko	Casing Grey RAL 7035	4	2,50	1245-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP 65
Dimension: 153mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 2X2P+Z SCHUKO SOCKET VERTICAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z V schuko	Casing Grey RAL 7035	4	2,50	1254-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP 65
Dimension: 76mm x 163mm x 57mm

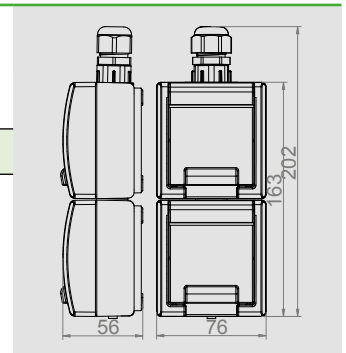


IP 65 IK 07 ABS TPE



AQUANT IP 65 3X2P+Z SCHUKO SOCKET HORIZONTAL

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z H schuko	Casing Grey RAL 7035	3	1,60	1246-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP 65
Dimension: 230mm x 81mm x 58mm

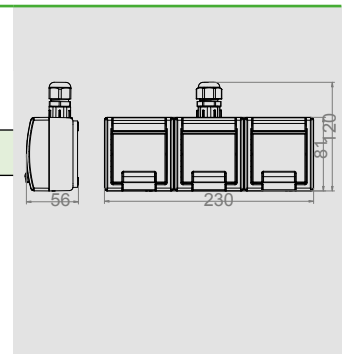


IP 65 IK 07 ABS TPE



AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH + 2X2P+Z SOCKET HORIZONTAL
AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH + 2X2P+Z SOCKET VERTICAL

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2x2P+Z H	RAL 7035+RAL 7043 (szary)	3	1,60	1249-65*
ŁNT-1+GNT 2x2P+Z V	RAL 7035+RAL 7043 (szary)			1262-65*

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Socket 2P+Z
Protection Degree IP 65
Dimension: 230mm x 81mm x 58mm

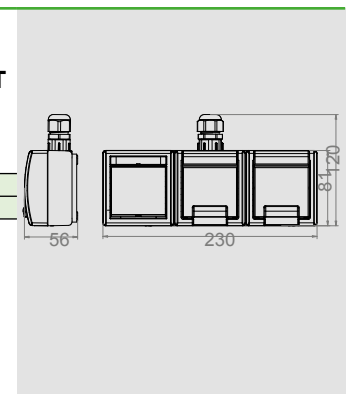

HERMES

HERMES hermetic equipment IP 44

HERMES IP 44 is a series of surface-mounted hermetic equipment manufactured by the company ELEKTRO-PLAST Nasielsk. The resistance of the HERMES IP 44 series products to moisture and dust, and the original design positions the series as the leader among the hermetic series available on the market. In the HERMES series there is the possibility of modular building of blocks, eg a switch with a socket in one body.



IP44





Advantages:

- the Hermes series is a leader among the hermetic series available on the market
- illuminated switches with the option of diode exchange
- resistance to moisture and dust
- possibility of modular block creation, eg switch with socket in one body
- original design
- accessories available in colors: white, cream, brown
- multiple sockets completely tied LgY
- Hermes series works well everywhere where there are difficult conditions, eg in garage halls, laundries, warehouses, food and outdoor premises



ELEKTRO-PLAST

N A S I E L S K


IP 44 ABS



HERMES IP 44 SINGLE POLE/TWO WAY SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	12	1,085	0331-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 DOUBLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	White RAL 9003	12	1,085	0332-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

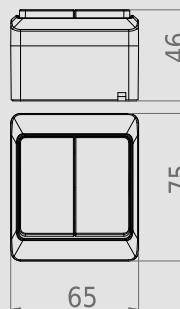


IP 44 ABS



HERMES IP 44 TWO POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2	White RAL 9003	12	1,085	0333-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

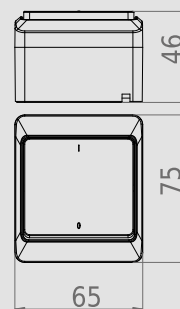


IP 44 ABS



HERMES IP 44 PUSH „LIGHT” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	White RAL 9003	12	1,085	0336-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 USH „BELL” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	White RAL 9003	12	1,085	0337-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

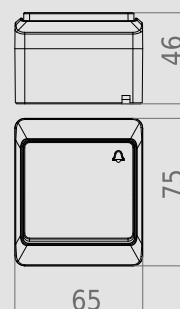


IP 44 ABS



HERMES IP 44 CROSSED SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	White RAL 9003	12	1,085	0338-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

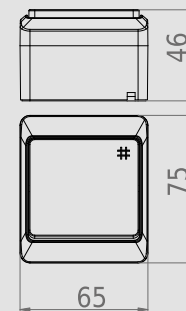

IP 44 ABS


NEW



HERMES IP 44 PUSH „KEY” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	White RAL 9003	12	1,085	0340-02

Button with pictogram „key”.
NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

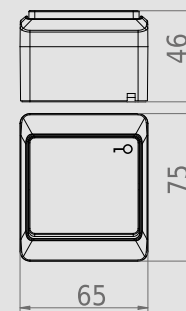


IP 44 ABS



HERMES IP 44 SINGLE POLE/TWO WAY SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+n	White RAL 9003	12	1,085	0341-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

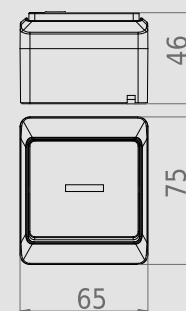


IP 44 ABS



HERMES IP 44 DOUBLE POLE SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5+n	White RAL 9003	12	1,085	0342-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

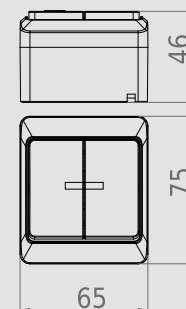


IP 44 ABS



HERMES IP 44 TWO POLE SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2+n	White RAL 9003	12	1,085	0343-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

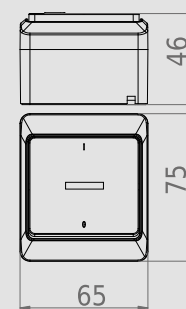


IP 44 ABS



HERMES IP 44 PUSH „LIGHT” SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S+n	White RAL 9003	12	1,085	0346-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

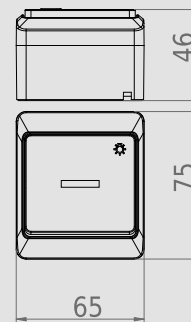


IP 44 ABS



HERMES IP 44 PUSH „BELL” SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D+n	White RAL 9003	12	1,085	0347-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

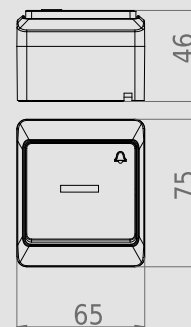


IP 44 ABS



HERMES IP 44 CROSSED SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7+n	White RAL 9003	12	1,085	0348-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

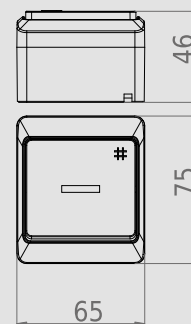


IP 44 **ABS**



HERMES IP 44 SINGLE POLE/TWO WAY SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003 + Smoke	12	1,085	0331-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

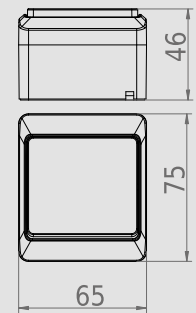


IP 44 **ABS**



HERMES IP 44 DOUBLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	White RAL 9003 + Smoke	12	1,085	0332-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

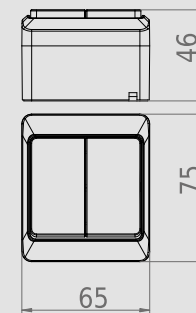


IP 44 **ABS**



HERMES IP 44 TWO POLES SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2	White RAL 9003 + Smoke	12	1,085	0333-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

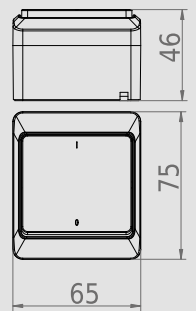


IP 44 **ABS**



HERMES IP 44 PUSH „LIGHT” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	White RAL 9003 + Smoke	12	1,085	0336-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

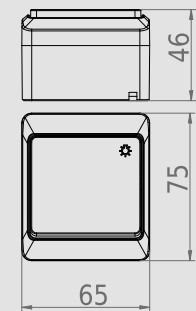


IP 44 **ABS**



HERMES IP 44 PUSH „BELL” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	White RAL 9003 + Smoke	12	1,085	0337-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

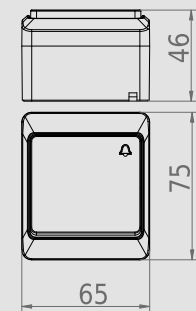


IP 44 ABS



HERMES IP 44 CROSSED SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	White RAL 9003 + Smoke	12	1,085	0338-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

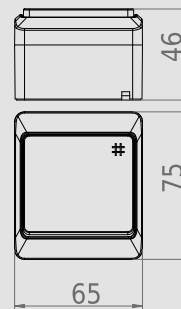


IP 44 ABS



HERMES IP 44 SINGLE POLE/TWO WAY SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+n	White RAL 9003+ Smoke	12	1,085	0341-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

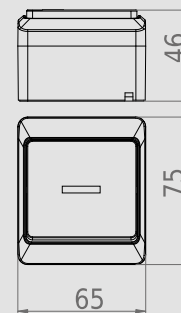


IP 44 ABS



HERMES IP 44 DOUBLE POLE SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5+n	White RAL 9003+ Smoke	12	1,085	0342-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

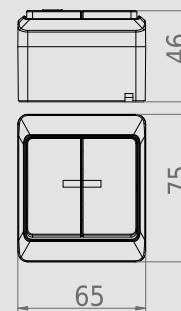


IP 44 ABS



HERMES IP 44 TWO POLE SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2+n	White RAL 9003 + Smoke	12	1,085	0343-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

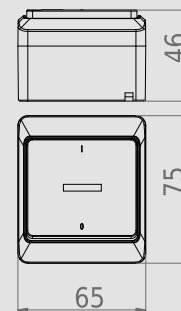


IP 44 ABS



HERMES IP 44 PUSH „LIGHT” SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S+n	White RAL 9003 + Smoke	12	1,085	0346-01

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

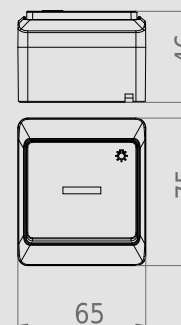


IP 44 ABS



HERMES IP 44 PUSH „ BELL ” SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D+n	White RAL 9003 + Smoke	12	1,085	0347-01

NORM: PN-EN-60669-1:2006
 Switches: 10AX/250V~ self-clamps
 Protection Degree IP44
 Dimension: 65mm x 75mm x 46mm

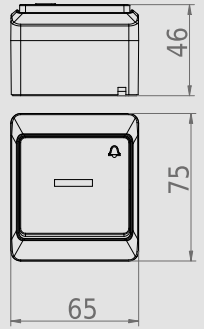


IP 44 ABS



HERMES IP 44 CROSSED SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7+n	White RAL 9003 + Smoke	12	1,085	0348-01

NORM: PN-EN-60669-1:2006
 Switches: 10AX/250V~ self-clamps
 Protection Degree IP44
 Dimension: 65mm x 75mm x 46mm

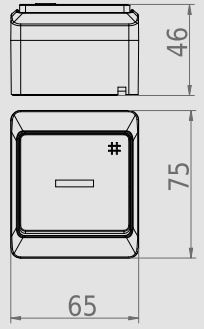


IP 44 ABS



HERMES IP 44 SINGLE POLE/TWO WAY SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	Brown RAL 8028	12	1,085	0331-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

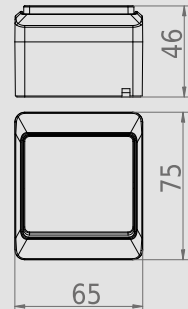


IP 44 ABS



HERMES IP 44 DOUBLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	Brown RAL 8028	12	1,085	0332-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

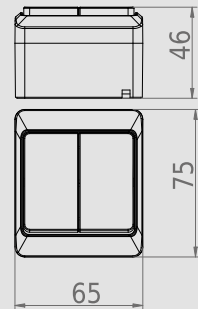


IP 44 ABS



HERMES IP 44 TWO POLES SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2	Brown RAL 8028	12	1,085	0333-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

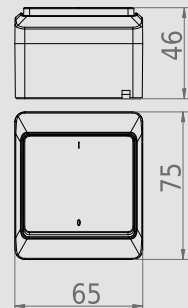


IP 44 ABS



HERMES IP 44 PUSH „LIGHT” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	Brown RAL 8028	12	1,085	0336-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

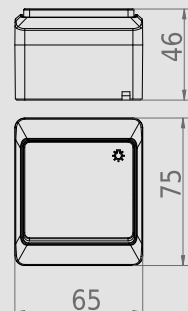


IP 44 ABS



HERMES IP 44 PUSH „BELL” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	Brown RAL 8028	12	1,085	0337-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

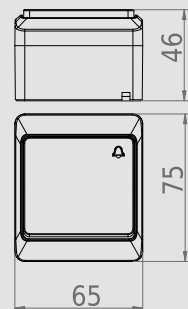


IP 44 ABS



HERMES IP 44 PUSH „BELL” SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
łNT-1D+n	Brown RAL 8028	12	1,085	0347-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

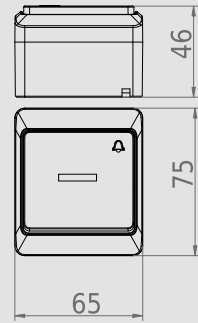


IP 44 ABS



HERMES IP 44 CROSSED SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
łNT-7+n	Brown RAL 8028	12	1,085	0348-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

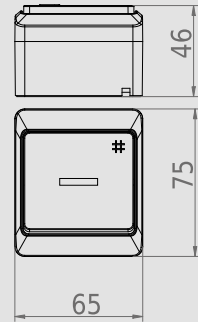


IP 44 ABS



HERMES IP 44 CROSSED SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	Brown RAL 8028	12	1,085	0338-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 SINGLE POLE/TWO WAY SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+n	Brown RAL 8028	12	1,085	0341-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

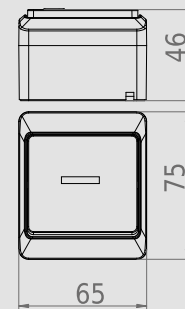


IP 44 ABS



HERMES IP 44 DOUBLE POLE SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5+n	Brown RAL 8028	12	1,085	0342-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

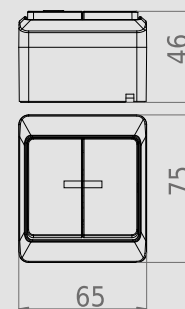


IP 44 ABS



HERMES IP 44 TWO POLE SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2+n	Brown RAL 8028	12	1,085	0343-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm

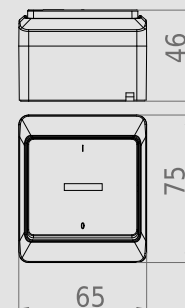


IP 44 ABS



HERMES IP 44 PUSH „LIGHT” SWITCH ILLUMINATED

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S+n	Brown RAL 8028	12	1,085	0346-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self-clamps
Protection Degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 **ABS**




HERMES IP 44 2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9016+smoke	12	1,085	0321-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65 mm x 75 mm x 48mm

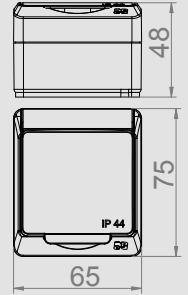


IP 44 **ABS**

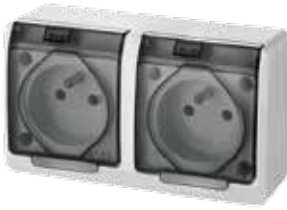


HERMES IP 44 2X2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9016+smoke	12	2,24	0322-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

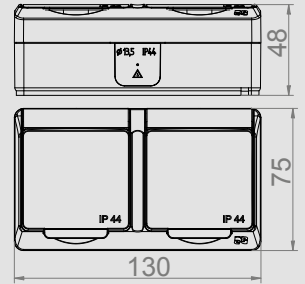


IP 44 **ABS**



HERMES IP 44 3X2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	White RAL 9016+smoke	4	1,14	0323-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 195 mm x 75 mm x 48mm

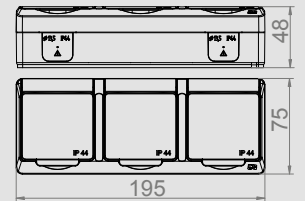


IP 44 ABS



HERMES IP 44 2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9016	12	1,085	0321-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65 mm x 75 mm x 48mm

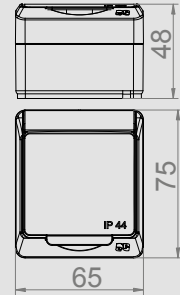


IP 44 ABS



HERMES IP 44 2X2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9016	12	2,24	0322-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

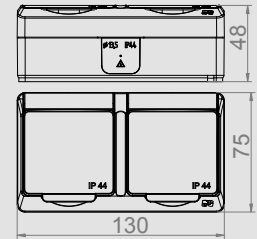


IP 44 ABS



HERMES IP 44 3X2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	White RAL 9016	4	1,14	0323-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 195 mm x 75 mm x 48mm

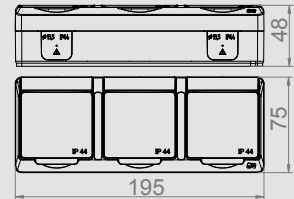

IP 44 **ABS**




HERMES IP 44 2P+Z SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	Brown RAL 8028	12	1,085	0321-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65 mm x 75 mm x 48mm

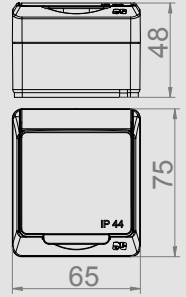

IP 44 **ABS**




HERMES IP 44 2X2P+Z SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	Brown RAL 8028	12	2,24	0322-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

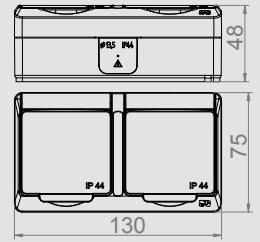

IP 44 **ABS**




HERMES IP 44 3X2P+Z SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	Brown RAL 8028	4	1,14	0323-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 195 mm x 75 mm x 48mm

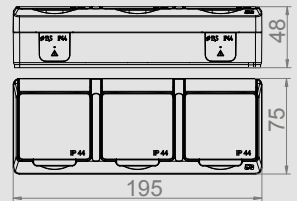


IP 44 ABS



HERMES IP 44 2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	Brown RAL 8028	12	1,085	0321-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65 mm x 75 mm x 48mm

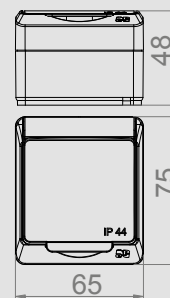


IP 44 ABS



HERMES IP 44 2X2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	Brown RAL 8028	12	2,24	0322-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3X2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	Brown RAL 8028	4	1,14	0323-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 195 mm x 75 mm x 48mm

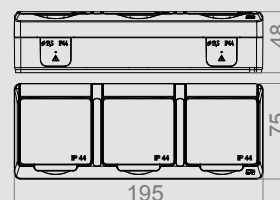


IP 44 **ABS**



HERMES IP 44 2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	White RAL 9016+smoke	12	1,085	0324-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65 mm x 75 mm x 48mm

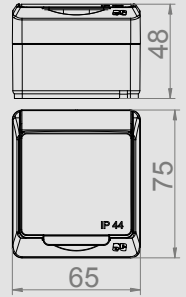


IP 44 **ABS**



HERMES IP 44 2X2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	White RAL 9016+smoke	12	2,24	0325-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

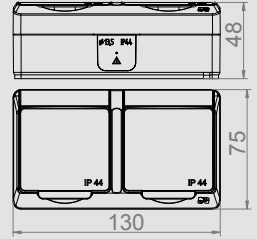


IP 44 **ABS**



HERMES IP 44 3X2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	White RAL 9016+smoke	4	1,14	0326-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 195 mm x 75 mm x 48mm

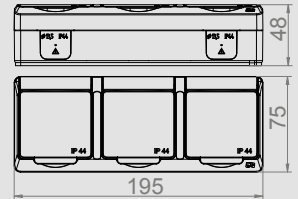

IP 44 ABS




HERMES IP 44 2P+Z SCHUKO SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	White RAL 9016	12	1,085	0324-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65 mm x 75 mm x 48mm

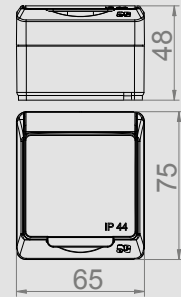

IP 44 ABS




HERMES IP 44 2X2P+Z SCHUKO SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	White RAL 9016	12	2,24	0325-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130mm x 75 mm x 48mm

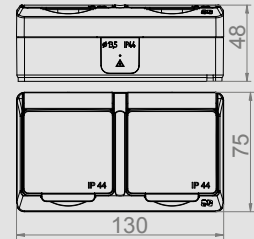

IP 44 ABS




HERMES IP 44 3X2P+Z SCHUKO SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	White RAL 9016	4	1,14	0326-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 195 mm x 75 mm x 48mm

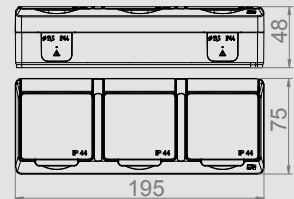

IP 44 **ABS**




HERMES IP 44 2P+Z SCHUKO SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	Brown RAL 8028	12	1,085	0324-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65 mm x 75 mm x 48mm

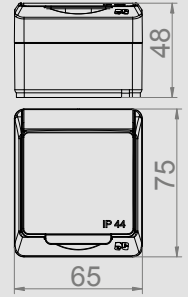

IP 44 **ABS**




HERMES IP 44 2X2P+Z SCHUKO SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	Brown RAL 8028	12	2,24	0325-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

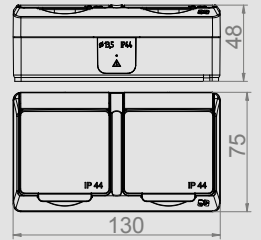

IP 44 **ABS**




HERMES IP 44 3X2P+Z SCHUKO SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	Brown RAL 8028	4	1,14	0326-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 195 mm x 75 mm x 48mm

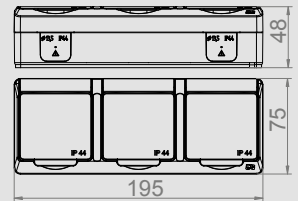

IP 44 ABS




HERMES IP 44 2P+Z SCHUKO SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	Brown RAL 8028	12	1,085	0324-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65 mm x 75 mm x 48mm

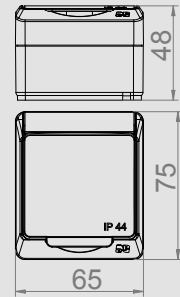

IP 44 ABS




HERMES IP 44 2X2P+Z SCHUKO SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	Brown RAL 8028	12	2,24	0325-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

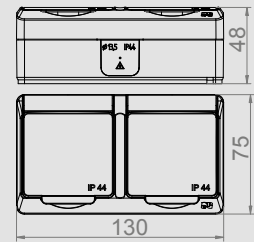

IP 44 ABS




HERMES IP 44 3X2P+Z SCHUKO SOCKET



Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	Brown RAL 8028	4	1,14	0326-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 195 mm x 75 mm x 48mm

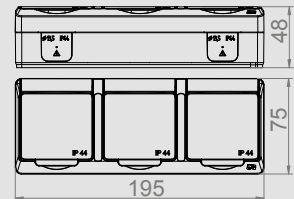




HERMES IP 44 2P+Z SOCKET + SINGLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2P+Z	White RAL 9003 + smoke	12	1,085	0327-11


NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

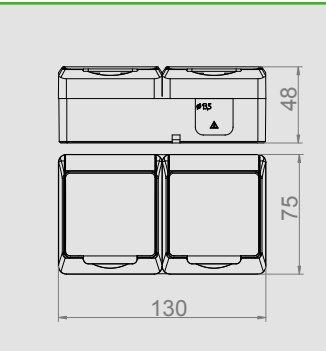

HERMES IP 44 2P+Z SOCKET + SINGLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2P+Z	White RAL 9003	12	2,24	0327-12


NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

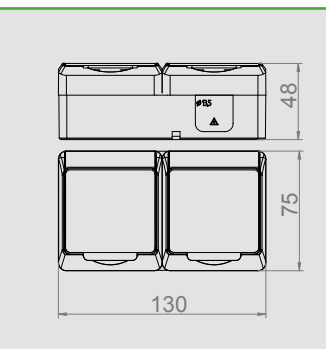

HERMES IP 44 2P+Z SOCKET + DOUBLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5+GNT 2P+Z	White RAL 9003 + smoke	12	2,24	0327-13


NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

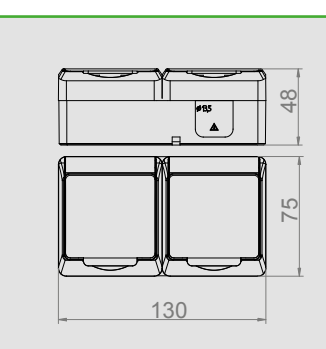

HERMES IP 44 2P+Z SOCKET + DOUBLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5+GNT 2P+Z	White RAL 9003	12	2,24	0327-14


NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 130 mm x 75 mm x 48mm

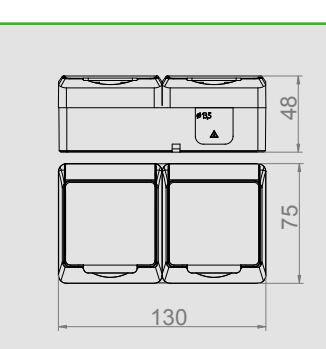













HERMES IP 44 2x2P+Z SOCKET + SINGLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2x2P+Z	White RAL 9003 + smoke	4	1,14	0327-21

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 195 mm x 75 mm x 48mm

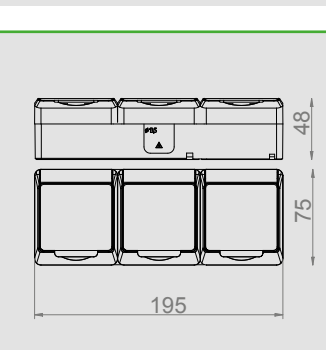












HERMES 2 HERMETIC SWITCHES

 <p>IP 44 ABS</p>	<h3>HERMES 2 IP 44 SINGLE POLE SWITCH</h3> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ŁNT-1</td> <td>White RAL 9016</td> <td rowspan="4">12</td> <td rowspan="4">1,18</td> <td>1001-00</td> </tr> <tr> <td>White+smoke*</td> <td>1001-01</td> </tr> <tr> <td>Cream*</td> <td>1001-10</td> </tr> <tr> <td>Brown RAL 8028*</td> <td>1001-20</td> </tr> </tbody> </table> <p>NORM: PN-EN-60669-1:2006 Switches: 10AX/250V~ screw terminals Protection Degree IP44 Dimension: 65mm x 69mm x 48mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	ŁNT-1	White RAL 9016	12	1,18	1001-00	White+smoke*	1001-01	Cream*	1001-10	Brown RAL 8028*	1001-20	
Type	Color	Pack. pc.	Weight pc./kg	Index														
ŁNT-1	White RAL 9016	12	1,18	1001-00														
	White+smoke*			1001-01														
	Cream*			1001-10														
	Brown RAL 8028*			1001-20														
 <p>IP 44 ABS</p>	<h3>HERMES 2 IP 44 DOUBLE POLE SWITCH</h3> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ŁNT-5</td> <td>White RAL 9016</td> <td rowspan="4">12</td> <td rowspan="4">1,18</td> <td>1002-00</td> </tr> <tr> <td>White+smoke*</td> <td>1002-01</td> </tr> <tr> <td>Cream*</td> <td>1002-10</td> </tr> <tr> <td>Brown RAL 8028*</td> <td>1002-20</td> </tr> </tbody> </table> <p>NORM: PN-EN-60669-1:2006 Switches: 10AX/250V~ screw terminals Protection Degree IP44 Dimension: 65mm x 69mm x 48mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	ŁNT-5	White RAL 9016	12	1,18	1002-00	White+smoke*	1002-01	Cream*	1002-10	Brown RAL 8028*	1002-20	
Type	Color	Pack. pc.	Weight pc./kg	Index														
ŁNT-5	White RAL 9016	12	1,18	1002-00														
	White+smoke*			1002-01														
	Cream*			1002-10														
	Brown RAL 8028*			1002-20														
 <p>IP 44 ABS</p>	<h3>HERMES 2 IP 44 TWO WAY SWITCH</h3> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ŁNT-3</td> <td>White RAL 9016</td> <td rowspan="4">12</td> <td rowspan="4">1,18</td> <td>1003-00</td> </tr> <tr> <td>White+smoke*</td> <td>1003-01</td> </tr> <tr> <td>Cream*</td> <td>1003-10</td> </tr> <tr> <td>Brown RAL 8028*</td> <td>1003-20</td> </tr> </tbody> </table> <p>NORM: PN-EN-60669-1:2006 Switches: 10AX/250V~ screw terminals Protection Degree IP44 Dimension: 65mm x 69mm x 48mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	ŁNT-3	White RAL 9016	12	1,18	1003-00	White+smoke*	1003-01	Cream*	1003-10	Brown RAL 8028*	1003-20	
Type	Color	Pack. pc.	Weight pc./kg	Index														
ŁNT-3	White RAL 9016	12	1,18	1003-00														
	White+smoke*			1003-01														
	Cream*			1003-10														
	Brown RAL 8028*			1003-20														
 <p>IP 44 ABS</p>	<h3>HERMES 2 IP 44 PUSH „LIGHT” SWITCH</h3> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ŁNT-1S</td> <td>White RAL 9016</td> <td rowspan="4">12</td> <td rowspan="4">1,18</td> <td>1004-00</td> </tr> <tr> <td>White+smoke*</td> <td>1004-01</td> </tr> <tr> <td>Cream*</td> <td>1004-10</td> </tr> <tr> <td>Brown RAL 8028*</td> <td>1004-20</td> </tr> </tbody> </table> <p>NORM: PN-EN-60669-1:2006 Switches: 10AX/250V~ screw terminals Protection Degree IP44 Dimension: 65mm x 69mm x 48mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	ŁNT-1S	White RAL 9016	12	1,18	1004-00	White+smoke*	1004-01	Cream*	1004-10	Brown RAL 8028*	1004-20	
Type	Color	Pack. pc.	Weight pc./kg	Index														
ŁNT-1S	White RAL 9016	12	1,18	1004-00														
	White+smoke*			1004-01														
	Cream*			1004-10														
	Brown RAL 8028*			1004-20														
 <p>IP 44 ABS</p>	<h3>HERMES 2 IP 44 PUSH „BELL” SWITCH</h3> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ŁNT-1D</td> <td>White RAL 9016</td> <td rowspan="4">12</td> <td rowspan="4">1,18</td> <td>1005-00</td> </tr> <tr> <td>White+smoke*</td> <td>1005-01</td> </tr> <tr> <td>Cream*</td> <td>1005-10</td> </tr> <tr> <td>Brown RAL 8028*</td> <td>1005-20</td> </tr> </tbody> </table> <p>NORM: PN-EN-60669-1:2006 Switches: 10AX/250V~ screw terminals Protection Degree IP44 Dimension: 65mm x 69mm x 48mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	ŁNT-1D	White RAL 9016	12	1,18	1005-00	White+smoke*	1005-01	Cream*	1005-10	Brown RAL 8028*	1005-20	
Type	Color	Pack. pc.	Weight pc./kg	Index														
ŁNT-1D	White RAL 9016	12	1,18	1005-00														
	White+smoke*			1005-01														
	Cream*			1005-10														
	Brown RAL 8028*			1005-20														
 <p>IP 44 ABS</p>	<h3>HERMES 2 IP 44 CROSSED SWITCH</h3> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td rowspan="4">ŁNT-7</td> <td>White RAL 9016</td> <td rowspan="4">12</td> <td rowspan="4">1,085</td> <td>1006-00</td> </tr> <tr> <td>White+smoke*</td> <td>1006-01</td> </tr> <tr> <td>Cream*</td> <td>1006-10</td> </tr> <tr> <td>Brown RAL 8028*</td> <td>1006-20</td> </tr> </tbody> </table> <p>NORM: PN-EN-60669-1:2006 Switches: 10AX/250V~ screw terminals Protection Degree IP44 Dimension: 65mm x 69mm x 48mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	ŁNT-7	White RAL 9016	12	1,085	1006-00	White+smoke*	1006-01	Cream*	1006-10	Brown RAL 8028*	1006-20	
Type	Color	Pack. pc.	Weight pc./kg	Index														
ŁNT-7	White RAL 9016	12	1,085	1006-00														
	White+smoke*			1006-01														
	Cream*			1006-10														
	Brown RAL 8028*			1006-20														

*on individual customer's order, extended waiting period

HERMES 2 HERMETIC SOCKETS

 <p>IP 44 ABS</p>	<p>HERMES 2 IP 44 2P+Z SOCKET</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td rowspan="4">GNT 2P+Z</td> <td>White RAL 9016</td> <td rowspan="4">12</td> <td rowspan="4">1,18</td> <td>1021-00</td> </tr> <tr> <td>Cream*</td> <td>1021-10</td> </tr> <tr> <td>Cream+smoke*</td> <td>1021-11</td> </tr> <tr> <td>Brown RAL 8028*</td> <td>1021-20</td> </tr> </tbody> </table> <p>NORM: PN-IEC-60884-1:2006 Sockets: 16A/250V~ screw terminals Protection Degree IP44 Dimension: 65mm x 69mm x 48mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	GNT 2P+Z	White RAL 9016	12	1,18	1021-00	Cream*	1021-10	Cream+smoke*	1021-11	Brown RAL 8028*	1021-20	
Type	Color	Pack. pc.	Weight pc./kg	Index														
GNT 2P+Z	White RAL 9016	12	1,18	1021-00														
	Cream*			1021-10														
	Cream+smoke*			1021-11														
	Brown RAL 8028*			1021-20														
 <p>IP 44 ABS</p>	<p>HERMES 2 IP 44 SOCKET 2X2P+Z SOCKET</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td rowspan="4">GNT 2x2P+Z</td> <td>White RAL 9016</td> <td rowspan="4">12</td> <td rowspan="4">1,36</td> <td>1022-00</td> </tr> <tr> <td>Cream*</td> <td>1022-10</td> </tr> <tr> <td>Cream+smoke*</td> <td>1022-11</td> </tr> <tr> <td>Brown RAL 8028*</td> <td>1022-20</td> </tr> </tbody> </table> <p>NORM: PN-IEC-60884-1:2006 Sockets: 16A/250V~ screw terminals Protection Degree IP44 Dimension: 126 mm x 69 mm x 47mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	GNT 2x2P+Z	White RAL 9016	12	1,36	1022-00	Cream*	1022-10	Cream+smoke*	1022-11	Brown RAL 8028*	1022-20	
Type	Color	Pack. pc.	Weight pc./kg	Index														
GNT 2x2P+Z	White RAL 9016	12	1,36	1022-00														
	Cream*			1022-10														
	Cream+smoke*			1022-11														
	Brown RAL 8028*			1022-20														
 <p>IP 44 ABS</p>	<p>HERMES 2 IP 44 SOCKET 3X2P+Z SOCKET</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td rowspan="4">GNT 3x2P+Z</td> <td>White RAL 9016</td> <td rowspan="4">4</td> <td rowspan="4">1,00</td> <td>1023-00</td> </tr> <tr> <td>Cream*</td> <td>1023-10</td> </tr> <tr> <td>Cream+smoke*</td> <td>1023-11</td> </tr> <tr> <td>Brown RAL 8028*</td> <td>1023-20</td> </tr> </tbody> </table> <p>NORM: PN-IEC-60884-1:2006 Sockets: 16A/250V~ screw terminals Protection Degree IP44 Dimension: 186 mm x 69 mm x 47mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	GNT 3x2P+Z	White RAL 9016	4	1,00	1023-00	Cream*	1023-10	Cream+smoke*	1023-11	Brown RAL 8028*	1023-20	
Type	Color	Pack. pc.	Weight pc./kg	Index														
GNT 3x2P+Z	White RAL 9016	4	1,00	1023-00														
	Cream*			1023-10														
	Cream+smoke*			1023-11														
	Brown RAL 8028*			1023-20														
 <p>IP 44 ABS</p>	<p>HERMES 2 IP 44 2P+Z SOCKET</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td>GNT 2P+Z</td> <td>White RAL 9016</td> <td>12</td> <td>1,18</td> <td>1021-01</td> </tr> </tbody> </table> <p>NORM: PN-IEC-60884-1:2006 Sockets: 16A/250V~ screw terminals Protection Degree IP44 Dimension: 65mm x 69mm x 48mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	GNT 2P+Z	White RAL 9016	12	1,18	1021-01							
Type	Color	Pack. pc.	Weight pc./kg	Index														
GNT 2P+Z	White RAL 9016	12	1,18	1021-01														
 <p>IP 44 ABS</p>	<p>HERMES 2 IP 44 2X2P+Z SOCKET</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td>GNT 2x2P+Z</td> <td>White RAL 9016</td> <td>12</td> <td>1,36</td> <td>1022-01</td> </tr> </tbody> </table> <p>NORM: PN-IEC-60884-1:2006 Sockets: 16A/250V~ screw terminals Protection Degree IP44 Dimension: 126 mm x 69 mm x 47mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	GNT 2x2P+Z	White RAL 9016	12	1,36	1022-01							
Type	Color	Pack. pc.	Weight pc./kg	Index														
GNT 2x2P+Z	White RAL 9016	12	1,36	1022-01														
 <p>IP 44 ABS</p>	<p>HERMES 2 IP 44 3X2P+Z SOCKET</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Color</th> <th>Pack. pc.</th> <th>Weight pc./kg</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td>GNT 3x2P+Z</td> <td>White RAL 9016</td> <td>12</td> <td>1,00</td> <td>1023-01</td> </tr> </tbody> </table> <p>NORM: PN-IEC-60884-1:2006 Sockets: 16A/250V~ screw terminals Protection Degree IP44 Dimension: 186 mm x 69 mm x 47mm</p>	Type	Color	Pack. pc.	Weight pc./kg	Index	GNT 3x2P+Z	White RAL 9016	12	1,00	1023-01							
Type	Color	Pack. pc.	Weight pc./kg	Index														
GNT 3x2P+Z	White RAL 9016	12	1,00	1023-01														

*on individual customer's order, extended waiting period


HERMES 2 HERMETIC SOCKETS



HERMES 2 IP 44 2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9016	12	1,18	1024-00
	Cream*			1024-10
	Cream+smoke*			1024-11
	Brown RAL 8028*			1024-20


NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65 mm x 69 mm x 47mm



HERMES 2 IP 44 2X2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	White RAL 9016	4	1,36	1025-00
	Cream*			1025-10
	Cream+smoke*			1025-11
	Brown RAL 8028*			1025-20


NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 126 mm x 69 mm x 47mm

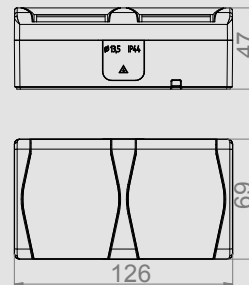

HERMES 2 IP 44 3X2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	White RAL 9016	4	1,00	1026-00
	Cream*			1026-10
	Cream+smoke*			1026-11
	Brown RAL 8028*			1026-20

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 186 mm x 69 mm x 47mm

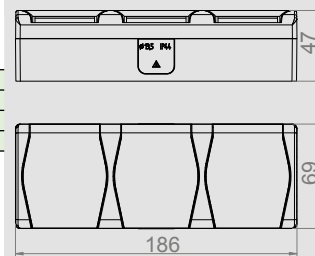

HERMES 2 IP 44 2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	White RAL 9016	12	1,18	1024-01


NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 65mm x 69mm x 48mm



HERMES 2 IP 44 2X2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	White RAL 9016	12	1,36	1025-01


NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 126 mm x 69 mm x 47mm

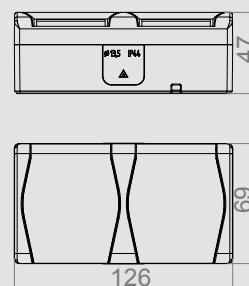

HERMES 2 IP 44 3X2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	White RAL 9016	12	1,00	1026-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection Degree IP44
Dimension: 186 mm x 69 mm x 47mm

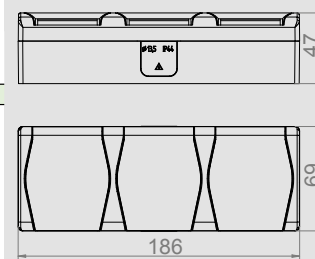

*on individual customer's order, extended waiting period

NEW



Surface-mounted series
BERG®



Advantages:

- small size
- high quality plastic > PA <
- screw mechanisms
- 16A sockets
- 10A circuit breakers
- the ability to insert cables from both the bottom and the side
- optional shields of current paths in sockets
- compact design
- extraordinary space for connecting wires
- a minimalist design that fits any interior
- ideal for the modernization of an existing installation


IP 20 PA



BERG SINGLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	10	1,085	3710-00

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 62 x 36mm

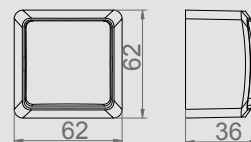


IP 20 PA



BERG DOUBLE POLE SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	White RAL 9003	10	1,085	3711-00

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 62 x 36mm

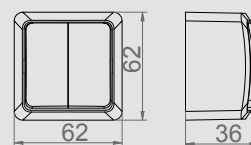


IP 20 PA



BERG TWO WAY SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-3	White RAL 9003	10	1,085	3712-00

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 62 x 36mm

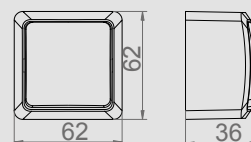


IP 20 PA



BERG PUSH „LIGHT” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	10	1,085	3713-00

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 62 x 36mm

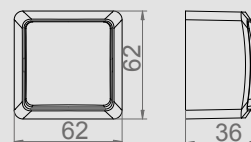


IP 20 PA



BERG PUSH „BELL” SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	10	1,085	3714-00

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 62 x 36mm

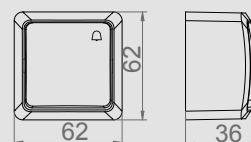


IP 20 PA



BERG CROSSED SWITCH

Type	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	10	1,085	3715-00

Istnieje możliwość zamówienia w wersji z keyem.
NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 62 x 36mm

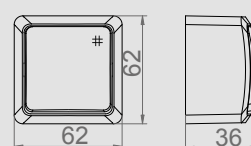


IP 20 PA



BERG 2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9003	10	1,085	3733-00

NORM: PN-EN-60669-1:2006
Switches: 16A/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG 2X2P+Z SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9003	10	2,24	3743-00

NORM: PN-EN-60669-1:2006
Switches: 16A/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 104 x 40mm




IP 20 PA



BERG 2P SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P	White RAL 9003	10	2,24	3740-00

NORM: PN-EN-60669-1:2006
Switches: 16A/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG 2X2P SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P	White RAL 9003	10	2,24	3744-00

NORM: PN-EN-60669-1:2006
Switches: 16A/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 104 x 40mm




IP 20 PA



BERG 2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9003	10	1,085	3737-00

NORM: PN-EN-60669-1:2006
Switches: 16A/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 62 x 39mm




IP 20 PA




BERG 2X2P+Z SCHUKO SOCKET

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9003	10	2,24	3738-00

NORM: PN-EN-60669-1:2006
Switches: 16A/250V~ screw terminals
Protection Degree IP20
Dimension: 62 x 104 x 43mm



screw mechanisms

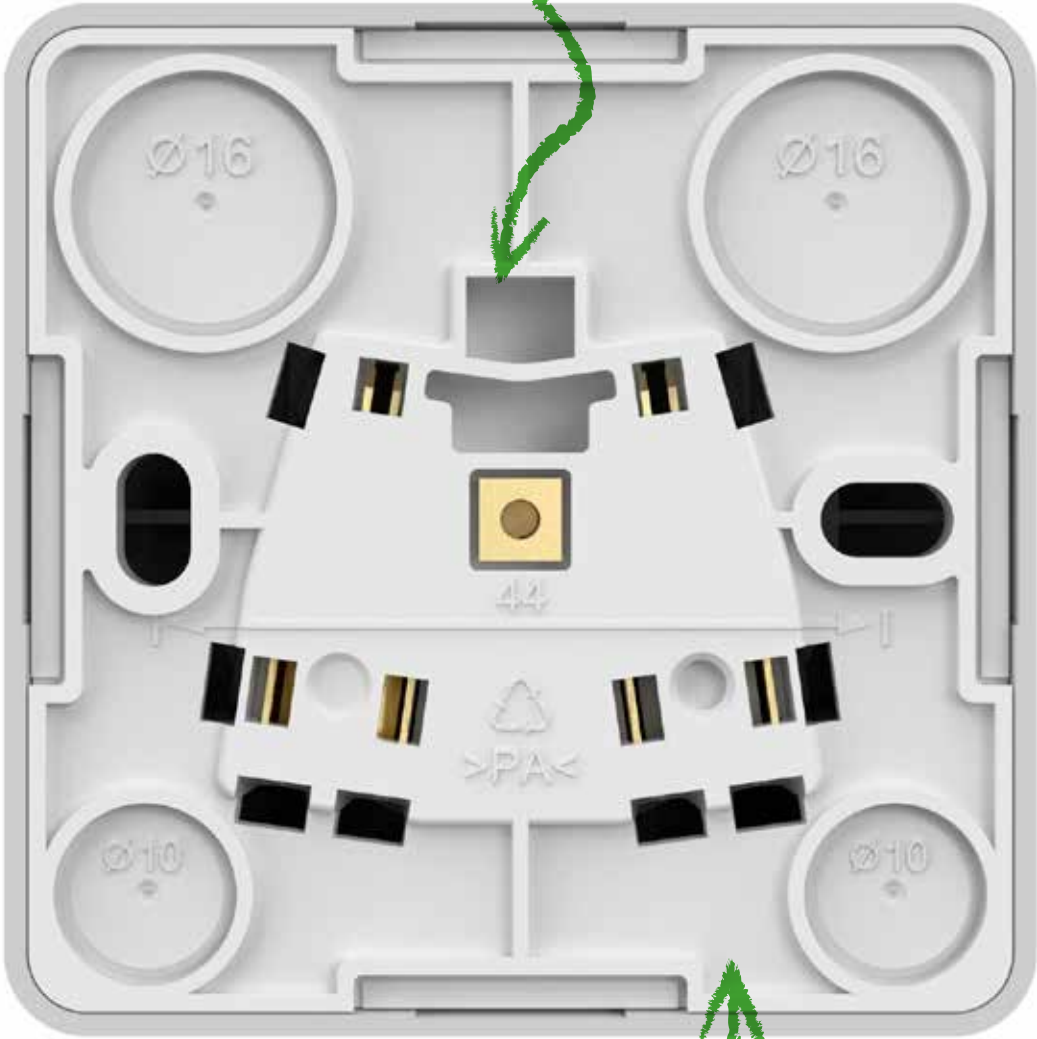

weakening at the bottom for cable entry



switches 10A / 250V
sockets 16A / 250V



