




ELEKTRO-PLAST

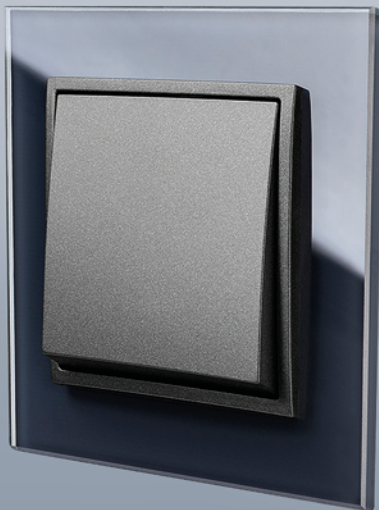

enclosures

hermetic
junction boxes

hermetic switches

switches and sockets

PRODUCT **CATALOG** 2021/22



MADE IN POLAND



ELEKTRO-PLAST

ELEKTRO-PLAST Nasielsk


is one of the largest companies in Poland specializing in the production of electrical installation equipment. The company has been operating on the electrotechnical market since 1983. Over 35 years of experience and products trusted by customers on the Polish and foreign markets, have allowed the company to create a wide range of electrical engineering.



Central Europe

IN THE COMPANY ASSORTMENT WE WILL FIND:

- modular equipment and EATON installation accessories
- ELEGANT, ECONOMIC BOX TM, MERIVA TM enclosures
- industrial enclosures EP-LUX, GALANT
- enclosures with power equipment, fixed and portable (RS series)
- HERMES and AQUANT hermetic switches and sockets
- switches and sockets flush-mounted ASTORIA, SENTIA, VOLANTE, CARLA, frame systems
- flush-mounted boxes (PRO series)
- taps and hermetic boxes
- other wiring equipment (handles, cable ties, connectors, glands, N / PE strips)

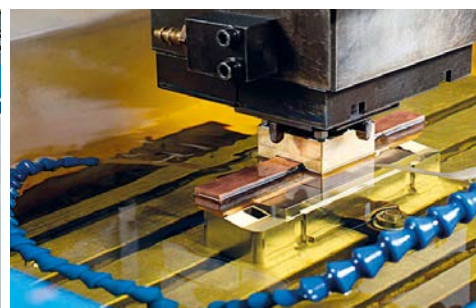




> 35 years
experience



> 300
professional stores



Modern
machine park



> 20 countries
export to over 20 countries



> 2500
products



CAD/CAM
studio





Target

Stand one of the leading manufacturer of electrical equipment in Europe and reliable business partner for all kind of distributors and fulfill all they expectations.

Global Development

Investment in design, product innovation and automated cycles production.



Innovative

We supply innovative high class products for low voltage electricity distribution and telecommunication area into residential segment and industry

Quality

The quality and reliability of our products caused trust to EPN brand across Europe

TABLE OF CONTENTS

ENCLOSURE

CIRCUIT PROTECTION.....	6
ENCLOSURES MIKRO/MINI.....	9
ENCLOSURES MSF™ WITH METAL DOOR IP 30.....	15
ENCLOSURES STEEL KRAFT.....	33
SURFACE-MOUNTED ENCLOSURES ECONOMIC BOX™ IP 40....	41
ENCLOSURES MERIVA IP 40.....	49
ENCLOSURES GREEN BOX IP 40.....	55
ENCLOSURES ELEGANT IP 40.....	59
ENCLOSURES HERMETIC EP-LUX PLUS IP 55/65.....	71
ENCLOSURES HERMETIC GALANT PLUS IP 65.....	77
ENCLOSURES HERMETIC HERMETICA IP65.....	83
POWER ENCLOSURES RS.....	91
POWER PLUGS AND SOCKETS.....	105
ENCLOSURES ZK.....	109
COUNTERBOARDS.....	111
ACCESSORIES.....	115

JUNCTION BOXES

INSTALLATION BOXES WINDPROOF.....	126
INSTALLATION BOXES FOR HOLLOW WALLS, SELF-EXTINGUISHING.....	127
INSTALLATION BOXES PRO FOR BRICK WALLS.....	131
INSTALLATION BOXES FOR BRICK WALLS.....	133
ACCESSORIES.....	134
INSTALLATION BOXES FLUSH MOUNTED INSTALL-BOX.....	136
INSTALLATION BOXES SURFACE-MOUNTED HERMETIC FAST-BOX IP 55.....	138
INSTALLATION BOXES SURFACE-MOUNTED EP-LUX TYPE PK	139
INSTALLATION BOXES SURFACE-MOUNTED HERMETIC 2K.....	143
INSTALLATION BOXES SURFACE-MOUNTED HERMETIC SERIES E.....	144
INSTALLATION BOXES SURFACE-MOUNTED.....	145
INSTALLATION BOXES SURFACE-MOUNTED HERMETIC CARBO-BOX.....	147
HERMETIC BOXES INDUSTRIAL IP65.....	148
JUNCTION BOXES INDUSTRIAL IP65.....	174
ACCESSORIES.....	177
TERMINAL BLOCKS.....	179

OSWITCHES AND SOCKETS HERMETIC

AQUANT™.....	182
HERMES.....	194
HERMES 2.....	213
BERG®.....	216

SWITCHES AND SOCKETS FLUSH MOUNTED

ASTORIA.....	224
SENTIA.....	234
VOLANTE.....	254
LORENTE.....	268
CARLA.....	278

INDEX OF REFERENCES.....	290
--------------------------	-----

PICTOGRAMS DESCRIPTIONS



DEGREE PROTECTION: THINGS AND LIQUIDES



FLAME RETARDANCY AND FIRE RESISTANCE



VOLTAGE



RAW MATERIAL TYPE



UV RESISTANCE



IMPACT RESISTANCE



MACHINE SEALING



ENCLOSURES


- CIRCUIT PROTECTION
- CASINGS
- METER BOARDS
- POWER ENCLOSURES

IP
20

POWER CIRCUIT BREAKERS CLS6 1-POLE CHARACTERISTIC B


Type	Rated current I_n (A)	Pack. 1 pc.	Weight kg/1 pc.	EATON number	Pack. 1 pc.
HN-B10	10	12/120	0,12	194819	12
HN-B16	16	12/120	0,12	194821	12
HN-B20	20	12/120	0,12	194822	12
HN-B25	25	12/120	0,12	194823	12

Rated short-circuit switching capacity 6kA
Technical data – page 121

IP
20400
V

POWER CIRCUIT BREAKERS HN 3-POLES CHARACTERISTIC B


Type	Rated current I_n (A)	Pack. 1 pc.	Weight kg/1 pc.	EATON number	Pack. 1 pc.
HN-B16/3	16	4/40	0,33	194881	4
HN-B20/3	20	4/40	0,33	194882	4
HN-B25/3	25	4/40	0,33	194883	4

IP
20

POWER CIRCUIT BREAKERS HN 1-POLE CHARACTERISTIC C

Type	Rated current I_n (A)	Pack. 1 pc.	Weight kg/1 pc.	EATON number	Pack. 1 pc.
HN-C10	10	12/120	0,12	194829	12
HN-C16	16	12/120	0,12	194831	12
HN-C20	20	12/120	0,12	194832	12
HN-C25	25	12/120	0,12	194833	12


Rated short-circuit switching capacity 6kA.
Technical data – page 121

IP
20400
V

POWER CIRCUIT BREAKERS HN 3-POLES CHARACTERISTIC C

Type	Rated current I_n (A)	Pack. 1 pc.	Weight kg/1 pc.	EATON number	Pack. 1 pc.
HN-C16/3	16	4/40	0,33	194891	4
HN-C20/3	20	4/40	0,33	194892	4
HN-C25/3	25	4/40	0,33	194893	4

Technical data – page 121




IP
20



POWER CIRCUIT BREAKERS HNC (2-POLES TYPE AC)

Type	In/ Δ In	Pack.	Weight	EATON number	Pack.
		1 pc.	kg/1 pc.		1 pc.
HNC-25/2/0,03	25/0,03	1/60	0,2	194690	1
HNC-40/2/0,03	40/0,03	1/60	0,2	194691	1

Impact resistance 250A, type AC
Technical data – page 121




IP
20 400
V



POWER CIRCUIT BREAKERS HNC (4-POLES TYPE AC)

Type	In/ Δ In	Pack.	Weight	EATON number	Pack.
		1 pc.	kg/1 pc.		1 pc.
HNC-25/4/0,03	25/0,03	1/30	0,38	194693	1
HNC-40/4/0,03	40/0,03	1/30	0,38	194694	1

Technical data – page 121




IP
20



POWER CIRCUIT BREAKERS WITH RESIDUAL CURRENT MODULE HNB (CHARACTERISTIC B)

Type	In/ Δ In	Pack.	Weight	EATON number	Pack.
		1 pc.	kg/1 pc.		1 pc.
HNB-B16/1N/003	16/0,03	1/60	0,2	195121	1
HNB-B20/1N/003	20/0,03	1/60	0,2	195122	1
HNB-B25/1N/003	25/0,03	1/60	0,2	195123	1

Technical data – page 121




IP
20 400
V



CIRCUIT BREAKERS SPCT2 WITH REPLACEABLE CARTRIDGE – CLASS C

Type	Rated current I_n (A)	Pack.	Weight	EATON number	Pack.
		1 pc.	kg/1 pc.		1 pc.
SPCT2-C-20/280/4	20kA	1/30	0,35	167596	1

Technical data – page 121






MAIN SWITCHES IS

Type	Rated current I_n (A)	Pack. 1 pc.	Weight kg/1 pc.	EATON number	Pack. 1 pc.
HIS-100/1	100	12/120	0,12	142828	12
HIS-100/3	100	4/40	0,33	142830	4
HIS-100/4	100	3/30	0,38	142831	3

Technical data – page 121




CONTROL LIGHT


Type	kolor	Pack.	Weight	F&F
		1 pc.	kg/1 pc.	number

LK-713K	L1	L2	L3	10/120	0.09	LK-713L
---------	----	----	----	--------	------	---------

The control lamp is used for optical signaling of voltage presence in individual circuit phases.



RESIDENTIAL SCHEME INSTALLATION

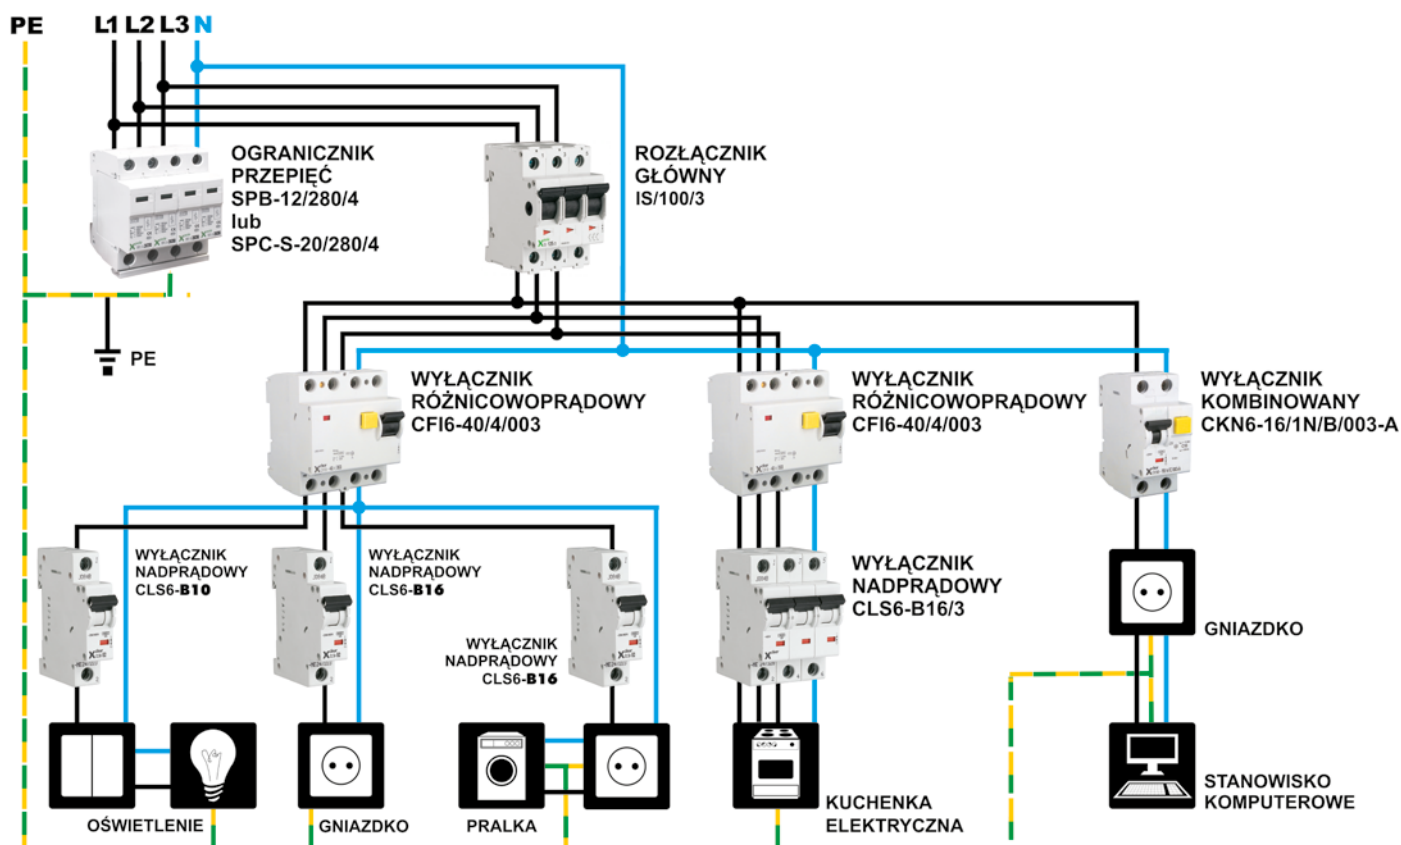



MIKRO/MINI CASINGS

Protection degree	IP 20 / IP 30
Material	PS
Impact resistance	IK 05
Thermal condition	-20°C +70°C
Thermal test	70°C
Norma	PN-EN 62208:2011 PN-EN 60670-24:2013





- protection degree IP 20 / IP 30
- protection class II
- S2, S4 MIKRO
- S2, S3, S4, S5, S6 MINI

- impact resistance IK05
- sealing possibility: casings and doors

hardened steel screws for
fast and solid assembly



sealing possibility: casings
and doors

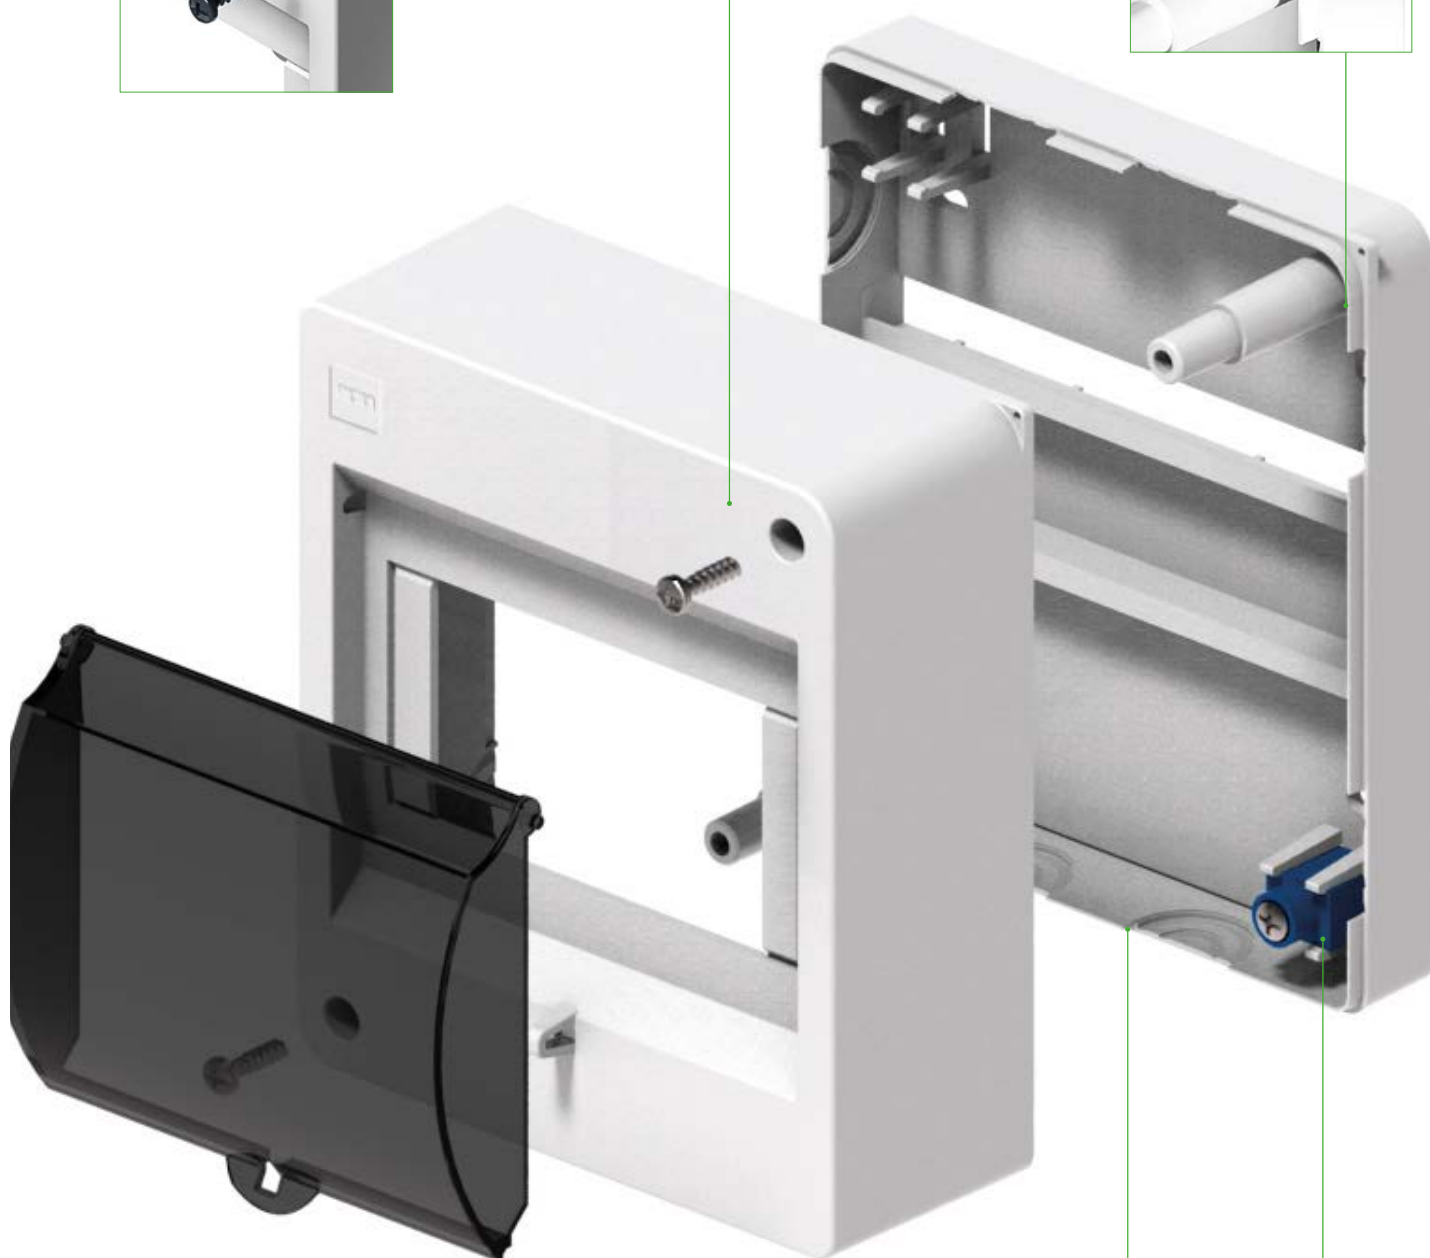

weaknesses for cables at
casing wall sides



protected terminal to avoid
accidents


IP 30 IK 05 400 V PS



MIKRO CASINGS SURFACE MOUNTED S-2

Rows / modules	Type	Term. N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/2	S2	-	20	0,08	2342-00

Casing folded into CLICK type self-locking
Sealing possibility casings. Snap mounting.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 44x125x58 mm




IP 30 IK 05 400 V PS



MIKRO CASINGS SURFACE MOUNTED S-4

Rows / modules	Type	Term. N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/2	S4	-	12	0,12	2344-00

Casing folded into CLICK type self-locking
Sealing possibility casings. Snap mounting.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 80x125x58 mm




IP 20 IK 05 400 V PS



MINI CASINGS SURFACE MOUNTED TYP S-2

Rows / modules	Type	Term. N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/2	S2	-	20	0,08	2302-00

Sealing possibility casings.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 53x141x66 mm




IP 20 IK 05 400 V PS



MINI CASINGS SURFACE MOUNTED TYP S-3

Rows / modules	Type	Term. N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/3	S3	-	12	0,13	2303-00
1/3	S3	tak	12	0,13	2303-10

Sealing possibility casings.
Equipped with a N terminal 1x2,5mm²
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 82x140x66 mm




IP 20 IK 05 400 V PS



MINI CASINGS SURFACE MOUNTED TYP S-4

Rows / modules	Type	Term. PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/4	S4	-	12	0,13	2304-00
1/4	S4	tak	12	0,14	2304-10

Terminal blocks included
N 1x(4x10mm² + 1x16mm²)
PE 1x(4x10mm² + 1x16mm²)
Sealing possibility casings.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 95x140x66 mm




IP 20 IK 05 400 V PS



MINI CASINGS SURFACE MOUNTED TYP S-5

Rows / modules	Type	Term. N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/5	S5	-	9	0,137	2305-00
1/5	S5	tak	9	0,140	2305-10

Terminal blocks included
Equipped with a N terminal 1x2,5mm²
Sealing possibility casings.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 120x140x66 mm






MINI CASINGS SURFACE MOUNTED S-6

Rows / modules	Type	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/6	S6	tak	9	0,23	2306-00
1/6	S6	-	9	0,24	2306-10


Terminal blocks included
 N 1x(6x10mm² + 1x16mm²)
 PE 1x(6x10mm² + 1x16mm²)
 Sealing possibility casings.
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 130x140x66 mm



MINI CASINGS SURFACE MOUNTED S-2 WITH GLASS

Rows / modules	Type	Glass color	Term. N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/2	S2	Transp.	-	20	0,09	2302-01


Sealing possibility casings and door.
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 53x141x83 mm



MINI CASINGS SURFACE MOUNTED S-3 WITH GLASS

Rows / modules	Type	Glass color	Term. N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/3	S3	Transp.	-	12	0,13	2303-01
1/3	S3	Transp.	tak	12	0,14	2303-11


Sealing possibility casings and door.
 Equipped with a N terminal 1x2,5mm²
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 82x140x84mm



MINI CASINGS SURFACE MOUNTED S-4 WITH GLASS

Rows / modules	Type	Glass color	Term. PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/4	S4	Transp.	-	12	0,15	2304-01
1/4	S4	Transp.	tak	12	0,16	2304-11


Terminal blocks included
 N 1x(4x10mm² + 1x16mm²)
 PE 1x(4x10mm² + 1x16mm²)
 Sealing possibility casings and door.
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 195x140x83 mm



MINI CASINGS SURFACE MOUNTED S-5 WITH GLASS

Rows / modules	Type	Glass color	Term. N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/5	S5	Transp.	-	9	0,16	2305-01
1/5	S5	Transp.	tak	9	0,17	2305-11


Sealing possibility casings and door.
 Equipped with a N terminal 1x2,5mm²
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 120x140x84 mm



MINI CASINGS SURFACE MOUNTED S-6 WITH GLASS

Rows / modules	Type	Glass color	Term. PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
1/6	S6	Transp.	tak	9	0,28	2306-01
1/6	S6	Transp.	-	9	0,30	2306-11

Terminal blocks included
 N 1x(6x10mm² + 1x16mm²)
 PE 1x(6x10mm² + 1x16mm²)
 Sealing possibility casings and door.
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013 Dimensions: 130x140x83 mm




ENCLOSURES MSF™ WITH METAL DOOR FLUSH MOUNTED IP30



MSF patch-panel 18 ports for mod. teletechnical + cover.
Index: 2000-48



MSF RP MULTIMEDIAL Index: 2013-00
PATCHPANEL with cover Index: 2000-48




Keylock Index: 2000-10

ATTRIBUTES OF MSF ENCLOSURES MULTI MEDIA VERSION FOR RESIDENTIAL

- 4 sizes available (1/12 :2/24 :3/36 : 4/48
- II class protection IP30
- flush mounted version with super flat metal doors (only 5 mm)
- assembly into hollow walls and brick walls
- possibility of joining enclosures next to electrical version one
- new rigid culvert plates for different cables diameters
- complete solution to tele-technical installation

CHARACTERISTIC OF MSF MULTI-MEDIA ENCLOSURE AS RESIDENTIAL DISTRIBUTION CENTRE:

- connection to local network and others media devices
- telephone separator for few telephones
- connection to broadband transmission (modem from internet supplier)
- suitable installation to easy crossing and services management
- structural cabling- provides higher speeds data transfer and is more stable that wireless technology

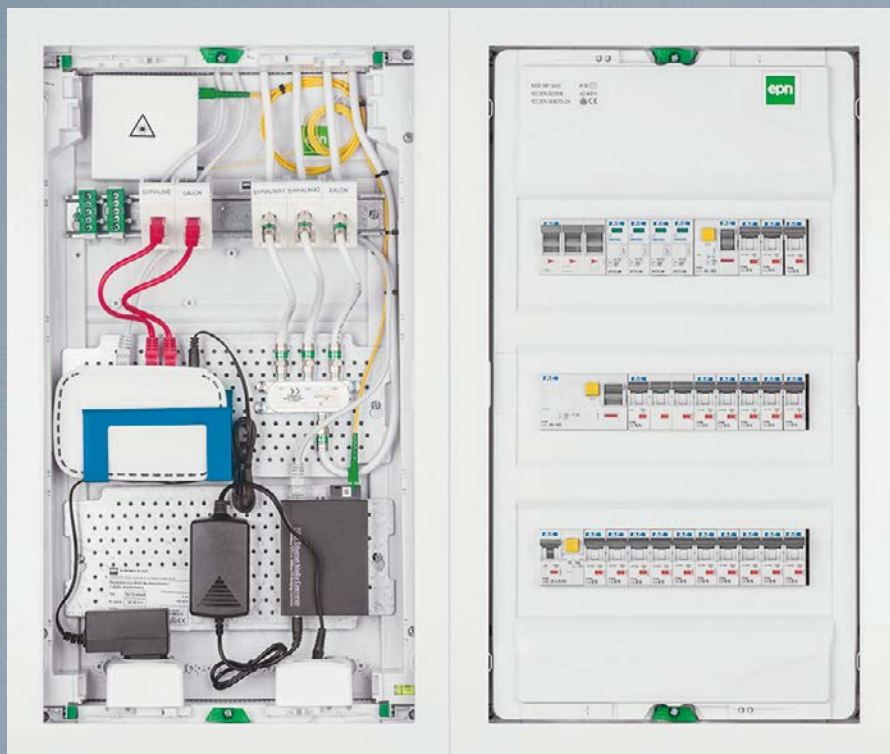

Enclosures MSF™

with metal door IP 30




Enclosures MSF™ with metal door IP 30

Flush mounted

Protection degree	IP 30
Material (door+frame/base)	Powder coated steel / >ABS FR< ;>ABS<
Impact resistance	IK 05
Thermal condition	-20°C +70°C
Thermal test	70°C
Norma	PN-EN 62208:2011, PN-EN 60670-24:2013

Electric flush mounted



With the option of extension up to 14 modules in a row



With the option of extension up to 14 modules in a row



With the option of extension up to 14 modules in a row





With the option of extension up to 14 modules in a row



With the option of extension up to 14 modules in a row

- PE+N terminal included
- łapy montażowe do muru
- opcjonalnie uchwyty do montażu w ścianach pustych

Multimedia Flush mounted

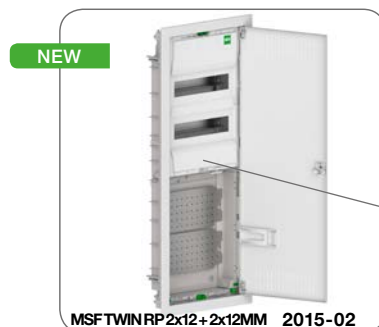

Enclosures MSF™ with metal door IP 30

Surface-mounted

Protection degree	IP 30
Material (door+frame/base)	Powder coated steel / >ABS FR< ;>ABS<
Impact resistance	IK 05
Thermal condition	-20°C +70°C
Thermal test	70°C
Norma	PN-EN 62208:2011, PN-EN 60670-24:2013

Electric surface-mounted



- wersja natynkowa
- PE+N terminal included
- osłabienia w ścianach
- wersja multimedialna

Multimedia surface-mounted



- gniazdo 16A/250V included
- płyta montażowa included
- opcjonalny patchpanel z pokrywą rewizyjną INDEX: 2000-48

Enclosures MSF™ with metal door IP 30

Super flat door and frame protruding above the wall 5mm, made of steel galvanized, powder coated.

Latch protected cover



Orderly installation, sorting handles for connection to cable ties

Fast assembly into hollow walls



NEW: opcjonalny wspornik z samozaciskami PE+N

Wspornik do listew
Index: 2000-22

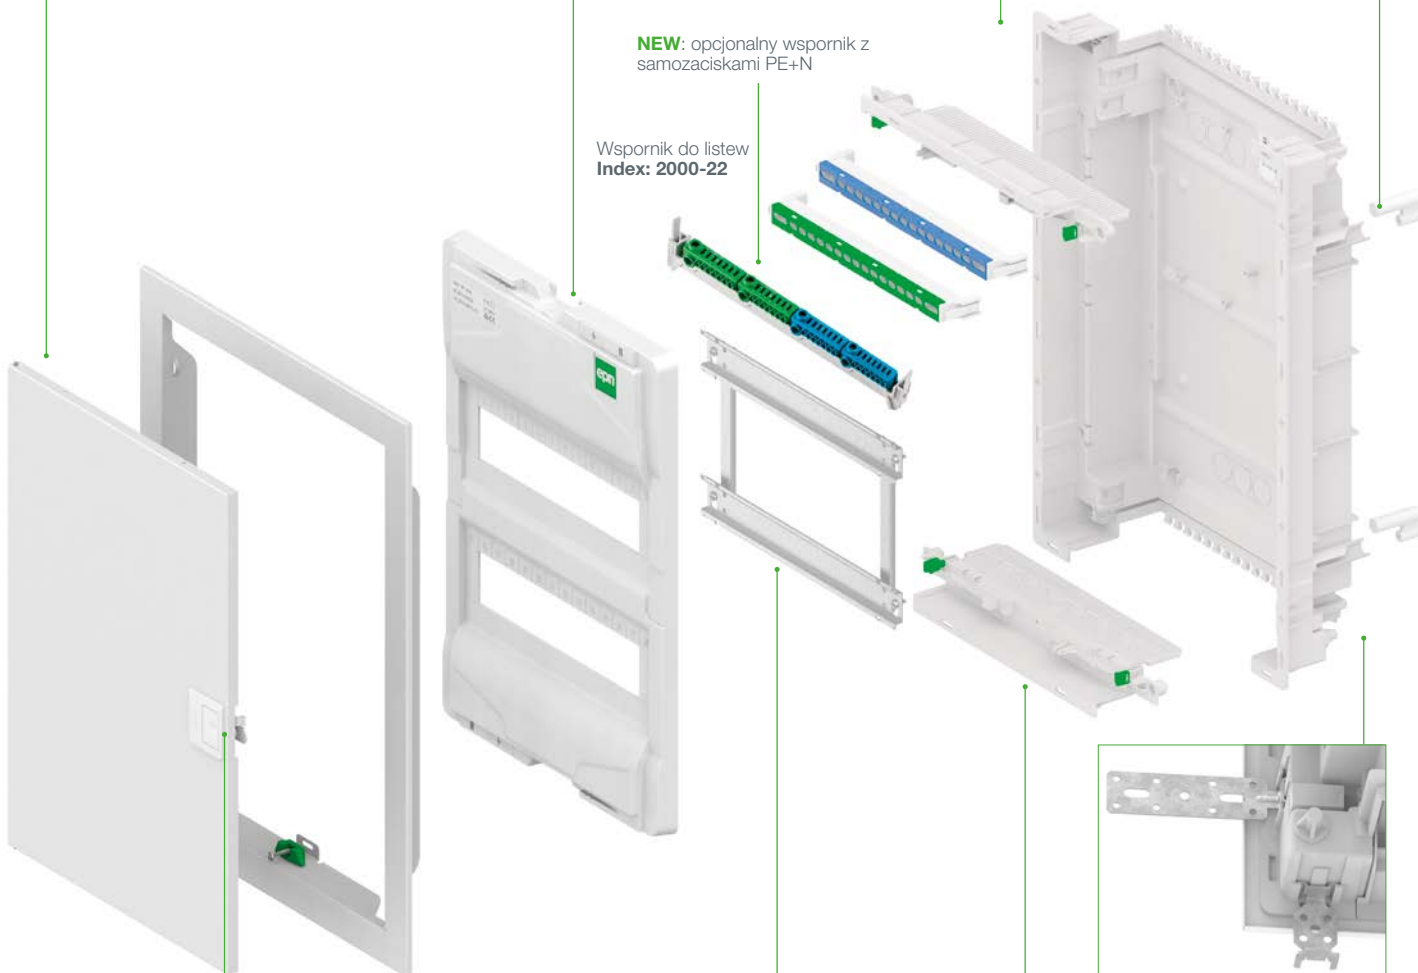

Anchors coupling and leveling for mounting in the wall. Level included.



Key lock option
Index: 2000-10



New strongest frame



Possibility of flexible
utilities and cabling



New bushing plates allowing
use flat wires

Patented UP Poland.

Enclosures MSF **ELECTRIC** IP 30

Flush mounted

IP

30

400

V

STEEL

□



MSF RP 1x12 IP 30 (PE+N)

Type	Color	Pack.	Weight	Index
MSF RP 1/14	White RAL 9016	1 pc.	kg/1 pc.	2001-00

Bracket with terminal equipped:

N 1x(1x25mm² + 7x16mm² + 7x10mm²)

PE 1x(1x25mm² + 7x16mm² + 7x10mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013


Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.

Protection degree IP 30, rated voltage 400 V AC

Super-flat steel door. Only 5 mm thickness

Outside dimensions: 358 x 329 x 94 mm

Dimensions of the hole in the wall for the enclosure: 330 x 301 x 91 mm



IP

30

400

V

STEEL

□



MSF RP 2x12 IP 30 (PE+N)

Type	Color	Pack.	Weight	Index
MSF RP 2/28	White RAL 9016	1 pc.	kg/1 pc.	2002-00

Bracket with terminal equipped:

N 1x(1x25mm² + 9x16mm² + 8x10mm²)

PE 1x(1x25mm² + 9x16mm² + 8x10mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013


Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.

Protection degree IP 30, rated voltage 400 V AC

Super-flat steel door. Only 5 mm thickness

Outside dimensions: 358 x 478 x 94 mm

Dimensions of the hole in the wall for the enclosure: 330 x 450 x 91 mm



IP

30

400

V

STEEL

□



MSF RP 3x12 IP 30 (PE+N)

Type	Color	Pack.	Weight	Index
MSF RP 3/42	White RAL 9016	1 pc.	kg/1 pc.	2003-00

Bracket with terminal equipped:

N 1x(1x25mm² + 11x16mm² + 11x10mm²)

PE 1x(1x25mm² + 11x16mm² + 11x10mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013


Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.

Protection degree IP 30, rated voltage 400 V AC

Super-flat steel door. Only 5 mm thickness

Outside dimensions: 358 x 603 x 94 mm

Dimensions of the hole in the wall for the enclosure: 330 x 575 x 91 mm



Enclosures MSF **ELECTRIC** IP 30

Flush mounted

IP
30
400
V
STEEL



MSF RP 4x12 IP 30 (PE+N)

Type	Color	Pack.	Weight	Index
MSF RP 4/56	White RAL 9016	1 pc.	kg/1 pc.	2004-00

Bracket with terminal equipped:

N 1x(1x25mm² + 13x16mm² + 12x10mm²)

PE 1x(1x25mm² + 13x16mm² + 12x10mm²)

NORM: IEC/EN 62208, IEC/EN 60670-24


Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.

Protection degree IP 30, rated voltage 400 V AC

Super-flat steel door. Only 5 mm thickness

Outside dimensions: 358 x 728 x 94 mm

Dimensions of the hole in the wall for the enclosure: 330 x 700 x 91 mm

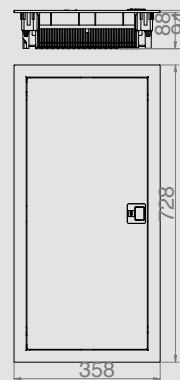

IP
30
400
V
STEEL



NEW

MSF RP 5x12 IP30 (PE+N)

Type	Color	Pack.	Weight	Index
MSF RP 5/72	White RAL 9016	1 pc.	kg/1 pc.	2005-00

Bracket with terminal equipped:

N 1x(1x25mm² + 7x16mm² + 7x10mm²)

PE 1x(1x25mm² + 7x16mm² + 7x10mm²)

N 1x(1x25mm² + 13x16mm² + 12x10mm²)

PE 1x(1x25mm² + 13x16mm² + 12x10mm²)


NORM: IEC/EN 62208, IEC/EN 60670-24

Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.

Protection degree IP 30, rated voltage 400 V AC

Outside dimensions: 330 x 825 x 94 mm

Dimensions of the hole in the wall for the enclosure: 358 x 853 x 97 mm

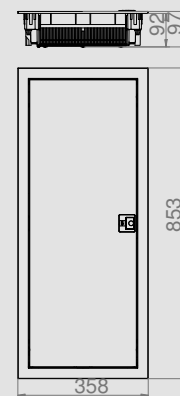

Multimedia Enclosures MSF IP 30

Flush mounted

IP 30

STEEL



MSF RP 1x12 MULTIMEDIA

Type	Color	Pack.	Weight	Index
MSF RP 1/14 MM	White RAL 9016	1 pc.	kg/1 pc.	2011-00

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013


Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally. Socket 2P+Z 250V 16A.

Mounting plate with holes for mounting devices tele-information.

Super-flat steel door. Only 5 mm thickness

Outside dimensions: 358 x 329 x 94 mm

Dimensions of the hole in the wall for the enclosure: 330 x 301 x 91 mm



IP 30

STEEL



MSF RP 2x12 MULTIMEDIA

Type	Color	Pack.	Weight	Index
MSF RP 2/28 MM	White RAL 9016	1 pc.	kg/1 pc.	2012-00

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.

Socket 2P+Z. 250V 16A. DIN 35 rail – 1 pc.


*DIN 35 rail mounted in enclosures is used only for mounting tele-informatic accessories.

Mounting plate with holes for mounting devices tele-information – 1 pc.

Super-flat steel door. Only 5 mm thickness

Outside dimensions: 358 x 478 x 94 mm

Dimensions of the hole in the wall for the enclosure: 330 x 450 x 91 mm



IP 30

STEEL



MSF RP 3x12 MULTIMEDIA

Type	Color	Pack.	Weight	Index
MSF RP 3/42 MM	White RAL 9016	1 pc.	kg/1 pc.	2013-00

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.

Socket 2P+Z 250V 16A. DIN 35 rail – 1 pc.


*DIN 35 rail mounted in enclosures is used only for mounting tele-informatic accessories.

Mounting plate with holes for mounting devices tele-information – 2 pcs.

Super-flat steel door. Only 5 mm thickness

Outside dimensions: 358 x 603 x 94 mm

Dimensions of the hole in the wall for the enclosure: 330 x 575 x 91 mm



IP 30

STEEL



MSF RP 4x12 MULTIMEDIA

Type	Color	Pack.	Weight	Index
MSF RP 4/56 MM	White RAL 9016	1 pc.	kg/1 pc.	2014-00

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.

Socket 2P+Z 250V 16A. DIN 35 rail – 1 pc.


*DIN 35 rail mounted in enclosures is used only for mounting tele-informatic accessories.

Mounting plate with holes for mounting devices tele-information – 3 pcs.

Super-flat steel door. Only 5 mm thickness

Outside dimensions: 358 x 728 x 94 mm

Dimensions of the hole in the wall for the enclosure: 330 x 700 x 91 mm

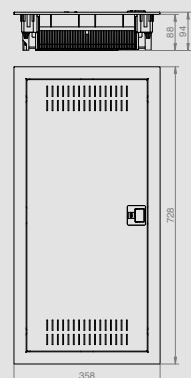


Enclosures MSF TWIN flush mounted



MSF TWIN RP 1X12 IP30 (PE+N) + 3X12 MULTIMEDIA*

Type	Color	Pack.	Weight	Index
MSF RP 1/14 + 3/42 MM	White RAL 9016	1 pc.	kg/1 pc.	2015-01

Bracket with terminal equipped:
 N 1x(1x25mm² + 7x16mm² + 7x10mm²)
 PE 1x(1x25mm² + 7x16mm² + 7x10mm²)
 NORM: IEC/EN 62208, IEC/EN 60670-24
 Enclosures equipped with 1 electrical row and 3 Multimedia boards.
 Enclosures equipped with power socket 16A/250V
 Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.
 Protection degree IP 30, rated voltage 400 V AC
 Super-flat steel door. Only 5 mm thickness
 * For individual customer orders
 Outside dimensions: 358 x 853 x 97 mm
 Dimensions of the hole in the wall for the enclosure: 330 x 825 x 94 mm

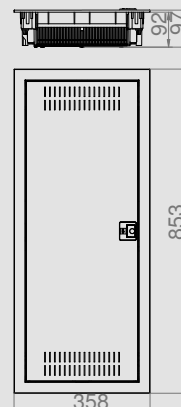


NEW

MSF TWIN RP 2X12 IP30 (PE+N) + 2X12 MULTIMEDIA

Type	Color	Pack.	Weight	Index
MSF RP 2/28 + 2/28 MM	White RAL 9016	1 pc.	kg/1 pc.	2015-02


Bracket with terminal equipped:
 N 1x(1x25mm² + 9x16mm² + 8x10mm²)
 PE 1x(1x25mm² + 9x16mm² + 8x10mm²)
 NORM: IEC/EN 62208, IEC/EN 60670-24
 Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.
 Protection degree IP 30, rated voltage 400 V AC
 Enclosures equipped with power socket 16A/250V
 Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally. RAIL TS35 group.
 Mounting plate with holes for mounting devices tele-information – 2 pcs.
 Outside dimensions: 358 x 853 x 97 mm
 Dimensions of the hole in the wall for the enclosure: 330 x 825 x 94 mm

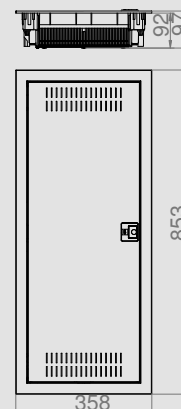

MSF TWIN RP 3X12 IP30 (PE+N) + 1X12 MULTIMEDIA*

Type	Color	Pack.	Weight	Index
MSF RP 3/42 + 1/14 MM	White RAL 9016	1 pc.	kg/1 pc.	2015-03

Bracket with terminal equipped:
 N 1x(1x25mm² + 11x16mm² + 11x10mm²)
 PE 1x(1x25mm² + 11x16mm² + 11x10mm²)
 NORM: IEC/EN 62208, IEC/EN 60670-24
 Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.
 Protection degree IP 30, rated voltage 400 V AC
 Enclosures equipped with power socket 16A/250V
 Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally. RAIL TS35 group.
 Mounting plate with holes for mounting devices tele-information – 1 pc.
 * For individual customer orders
 Outside dimensions: 358 x 853 x 97 mm
 Dimensions of the hole in the wall for the enclosure: 330 x 825 x 94 mm

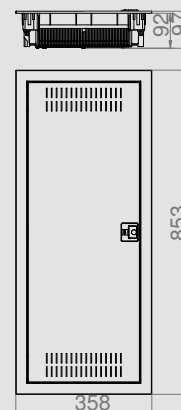

* For individual customer orders

Enclosures MSF TWIN surface-mounted




MSF TWIN RN 1X12 IP30 (PE+N) + 3X12 MULTIMEDIA*

Type	Color	Pack.	Weight	Index
MSF RN 1/14 + 3/42 MM	White RAL 9016	1 pc.	kg/1 pc.	2015-10

Bracket with terminal equipped:
 N 1x(1x25mm² + 7x16mm² + 7x10mm²)
 PE 1x(1x25mm² + 7x16mm² + 7x10mm²)
 NORM: IEC/EN 62208, IEC/EN 60670-24
 Enclosures equipped with 1 electrical row and 3 Multimedia boards
 Enclosures equipped with power socket 16A/250V

Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.
 Protection degree IP 30, rated voltage 400 V AC
 Super-flat steel door. Only 5 mm thickness
 * For individual customer orders
 Outside dimensions: 358 x 853 x 100 mm

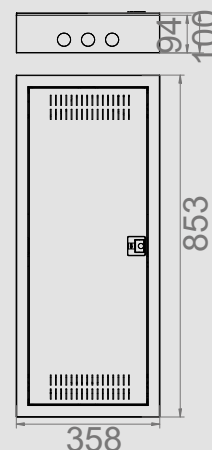


MSF TWIN RN 2X12 IP30 (PE+N) + 2X12 MULTIMEDIA*

Type	Color	Pack.	Weight	Index
MSF RN 2/28 + 2/28 MM	White RAL 9016	1 pc.	kg/1 pc.	2015-20

Bracket with terminal equipped:
 N 1x(1x25mm² + 9x16mm² + 8x10mm²)
 PE 1x(1x25mm² + 9x16mm² + 8x10mm²)
 NORM: IEC/EN 62208, IEC/EN 60670-24
 Enclosures equipped with power socket 16A/250V
 Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.
 Protection degree IP 30, rated voltage 400 V AC

RAIL TS35 group.
 Mounting plate with holes for mounting devices tele-information – 2 pcs.
 * For individual customer orders
 Outside dimensions: 358 x 853 x 100 mm

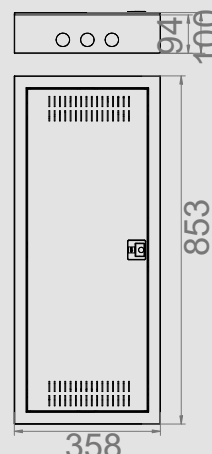


MSF TWIN RN 3X12 IP30 (PE+N) + 1X12 MULTIMEDIA*

Type	Color	Pack.	Weight	Index
MSF RN 3/42 + 1/14 MM	White RAL 9016	1 pc.	kg/1 pc.	2015-30

Bracket with terminal equipped:
 N 1x(1x25mm² + 11x16mm² + 11x10mm²)
 PE 1x(1x25mm² + 11x16mm² + 11x10mm²)
 NORM: IEC/EN 62208, IEC/EN 60670-24
 Enclosures equipped with power socket 16A/250V
 Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.
 Protection degree IP 30, rated voltage 400 V AC

RAIL TS35 group.
 Mounting plate with holes for mounting devices tele-information – 1 pc.
 * For individual customer orders
 Outside dimensions: 358 x 853 x 100 mm

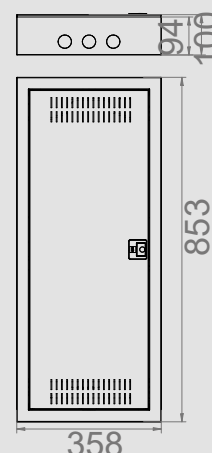

Enclosures MSF **ELECTRIC** IP 30

surface-mounted


IP
30
STEEL



MSF RN 1x12 IP30 (PE+N)

Type	Color	Pack.	Weight	Index
MSF RN 1/14	White RAL 9016	1 pc.	kg/1 pc.	2001-11

Bracket with terminal equipped:
 N 1x(1x25mm² + 7x16mm² + 7x10mm²)
 PE 1x(1x25mm² + 7x16mm² + 7x10mm²)
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Protection degree IP 30, rated voltage 400 V AC
 Super-flat steel door. Only 5 mm thickness
 Lock with key included.
 Outside dimensions: 358 x 329 x 98 mm




IP
30
STEEL



MSF RN 2x12 IP30 (PE+N)

Type	Color	Pack.	Weight	Index
MSF RN 2/28	White RAL 9016	1 pc.	kg/1 pc.	2002-11

Bracket with terminal equipped:
 N 1x(1x25mm² + 9x16mm² + 8x10mm²)
 PE 1x(1x25mm² + 9x16mm² + 8x10mm²)
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Protection degree IP 30, rated voltage 400 V AC
 Super-flat steel door. Only 5 mm thickness
 Lock with key included.
 Outside dimensions: 358 x 478 x 98 mm




IP
30
STEEL



MSF RN 3x12 IP30 (PE+N)

Type	Color	Pack.	Weight	Index
MSF RN 3/42	White RAL 9016	1 pc.	kg/1 pc.	2003-11

Bracket with terminal equipped:
 N 1x(1x25mm² + 11x16mm² + 11x10mm²)
 PE 1x(1x25mm² + 11x16mm² + 11x10mm²)
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Protection degree IP 30, rated voltage 400 V AC
 Super-flat steel door. Only 5 mm thickness
 Lock with key included.
 Outside dimensions: 358 x 603 x 98 mm



Enclosures MSF **ELECTRIC** IP 30 surface-mounted


**IP
30**
STEEL



MSF RN 4x12 IP30 (PE+N)

Type	Color	Pack.	Weight	Index
MSF RN 4/56	White RAL 9016	1 pc.	kg/1 pc.	2004-11

Bracket with terminal equipped:
 N 1x(1x25mm² + 13x16mm² + 12x10mm²)
 PE 1x(1x25mm² + 13x16mm² + 12x10mm²)
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Protection degree IP 30, rated voltage 400 V AC
 Super-flat steel door. Only 5 mm thickness
 Lock with key included.
 Outside dimensions: 358 x 728 x 98 mm



**IP
30**
STEEL


NEW



MSF RN 5x12 IP30 (PE+N)*

Type	Color	Pack.	Weight	Index
MSF RN 5/72	White RAL 9016	1 pc.	kg/1 pc.	2005-11

Bracket with terminal equipped:
 N 1x(1x25mm² + 7x16mm² + 7x10mm²)
 PE 1x(1x25mm² + 7x16mm² + 7x10mm²)
 N 1x(1x25mm² + 13x16mm² + 12x10mm²)
 PE 1x(1x25mm² + 13x16mm² + 12x10mm²)
 NORM: IEC/EN 62208, IEC/EN 60670-24
 Includes kit for universal installation in a wall, among others, foot metal wall, clip to connect switchgear vertically and horizontally.
 Protection degree IP 30, rated voltage 400 V AC
 * For individual customer orders
 Outside dimensions: 358 x 853 x 100 mm

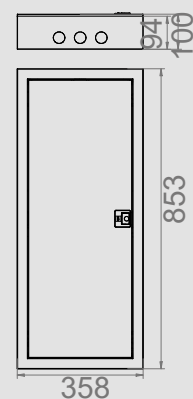

* For individual customer orders

Multimedia Enclosures MSF IP 30

surface-mounted


IP
30
STEEL



MSF RN 1x12 IP30 MULTIMEDIA WHITE STEEL

Type	Color	Pack.	Weight	Index
MSF RN 1/14 MM	White RAL 9016	1 pc.	kg/1 pc.	2011-11

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Socket n/t 2P+Z
 Mounting plate with holes for fixing tele-information devices.
 Super-flat steel door. Only 5 mm thicknes
 Lock with key included.
 Outside dimensions: 358 x 329 x 98 mm




IP
30
STEEL



MSF RN 2x12 IP30 MULTIMEDIA WHITE STEEL

Type	Color	Pack.	Weight	Index
MSF RN 2/28 MM	White RAL 9016	1 pc.	kg/1 pc.	2012-11

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Socket n/t 2P+Z
 Mounting plate with holes for fixing tele-information devices.
 *DIN 35 rail mounted in enclosures is used only for mounting tele-informatic accessories.
 Super-flat steel door. Only 5 mm thicknes
 Lock with key included.
 Outside dimensions: 358 x 478 x 98 mm




IP
30
STEEL



MSF RN 3x12 IP30 MULTIMEDIA WHITE STEEL

Type	Color	Pack.	Weight	Index
MSF RN 3/42 MM	White RAL 9016	1 pc.	kg/1 pc.	2013-11

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Socket n/t 2P+Z
 Mounting plate with holes for fixing tele-information devices.
 *DIN 35 rail mounted in enclosures is used only for mounting tele-informatic accessories.
 Super-flat steel door. Only 5 mm thicknes
 Lock with key included.
 Outside dimensions: 358 x 603 x 98 mm




IP
30
STEEL



MSF RN 4x12 IP30 MULTIMEDIA WHITE STEEL

Type	Color	Pack.	Weight	Index
MSF RN 4/56 MM	White RAL 9016	1 pc.	kg/1 pc.	2014-11

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Socket n/t 2P+Z
 Mounting plate with holes for fixing tele-information devices.
 *DIN 35 rail mounted in enclosures is used only for mounting tele-informatic accessories.
 Super-flat steel door. Only 5 mm thicknes
 Lock with key included.
 Outside dimensions: 358 x 728 x 98 mm




Multimedia **Enclosures** MSF surface-mounted



MSF RN 2X12 MULTIMEDIA WS

Type	Color	Pack.	Weight	Index
MSF RN WS 2/28 MM	White RAL 9016	1 pc.	kg/1 pc.	2012-12
		1	5,82	

Mounting plate with holes for fixing tele-information devices.
Patchpanel 16-ports with socket 2P+Z.
Super-flat steel door. Only 5 mm thickness
Optional keylock.
Outside dimensions: 340 x 600 x 100 mm



plyty montażowe z otworami do zamocowania urządzeń tele-informatycznych



oddzielna przestrzeń krosowa, umożliwiającą prosty i przejrzysty montaż



rozdzielnica drugiej klasy ochrony with cable uziemiającym drzwi w zestawie



otwory w drzwiach umożliwiające zarówno wentylację instalacji jak i swobodny przepływ fal WiFi na zewnątrz rozdzielnic



znaczna przestrzeń montażowa 300 x 400 x 75



super płaskie drzwi wykonane ze stali lakierowanej proszkowo



metalowy Patch-Panel 16-portowy, możliwy do uzbrojenia poza rozdzielnicą



opcja zamka na klucz
Index: 2000-10



postument umożliwiający montaż rozdzielnic przy ścianie bezpośrednio na posadźce



gniazdo zasilające 16A/250V



nienaganna estetyka oraz solidna metalowa obudowa lakierowana proszkowo RAL 9016

Accessories Enclosures MSF IP 30


IP
30
400
V
STEEL



MSF METAL DOORS ELECTRIC FRAME COMPLETE

Type	Color	Pack. 1 pc.	Weight kg/1 pc.	Index
Door 1x14 steel with frame	White RAL 9016	1	1,25	2000-01
Door 2x14 steel with frame			1,5	2000-02
Door 3x14 steel with frame			1,8	2000-03
Door 4x14 steel with frame			2,1	2000-04
Door 5x14 steel with frame			2,6	2000-05

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Protection degree IP 30
Super flat steel door
Dimensions: 359 x 464 x 91 mm




IP
30
400
V
STEEL



MSF METAL DOORS MULTIMEDIA FRAME COMPLETE

Type	Color	Pack. 1 pc.	Weight kg/1 pc.	Index
Door 1x14 MULTIMEDIA steel with frame	White RAL 9016	1	1,25	2000-11
Door 2x14 MULTIMEDIA steel with frame			1,50	2000-12
Door 3x14 MULTIMEDIA steel with frame			1,78	2000-13
Door 4x14 MULTIMEDIA steel with frame			2,0	2000-14
Door 5x14 MULTIMEDIA steel with frame			2,7	2000-15


NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Protection degree IP 30
Super flat steel door
Dimensions: 359 x 464 x 91 mm



MSF PATCH-PANEL 16-PORTS STEEL + COVER

Type	Color	Pack. 1 pc.	Weight kg/1 pc.	Index
Patch panel+cover	White RAL 9016	1	-	2000-48


For tele-info modules.
MSF patch-panel 18 ports + cover.
Optional socket 230V, the possibility of using F-F sockets, various holes.



MSF FIXING SET FOR HOLLOW WALLS

Type	Color	Pack. 1 pc.	Weight kg/1 pc.	Index
Fixing kit	White RAL 9016	1	0,03	2000-00


This kit allows installation of switchgear MSF in the walls of plasterboard.
Includes 4 pcs of brackets for mounting switchgear.



MSF DOOR LOCK METALLIC KEYS

Type	Color	Pack. 1 pc.	Weight kg/1 pc.	Index
Key lock	White RAL 9016	1	0,034	2000-10


The lock used to permanently close the cabinet door unauthorized access.



MSF MOUNTING PLATE MICRO-PERFORATED UNIVERSAL 270X124 MM MULTIMEDIA

Type	Color	Pack.	Weight	Index
Mounting plate	White RAL 9016	1 pc.	kg/1 pc.	
		1	0,3	2000-27

MSF mounting plate micro-perforated Universal 270x124 mm MULTIMEDIA
Mounting holes Ø 3,2 mm




ROUTER

MSF HANDLE METAL DEVICES MULTIMEDIA

Type	Color	Pack.	Weight	Index
MSF-Uchwyt	Blue RAL 5005	1 pc.	kg/1 pc.	
		1	0,12	2000-32


MSF handle metal devices MULTIMEDIA: router Wi-Fi, modem.
Requires the use of plates 2000-27.



MSF SOCKET N/T 2P+Z 16A MULTIMEDIA

Type	Color	Pack.	Weight	Index
GNT 2P+Z	White RAL 9016	1 pc.	kg/1 pc.	
		1	0,06	2000-33


Socket n / t 2P + Z 250V for mounting two additional power supplies in interior switchgear MSF



MSF SOCKET N/T 2X2P+Z 16A MULTIMEDIA

Type	Color	Pack.	Weight	Index
GNT 2x2P+Z	White RAL 9016	1 pc.	kg/1 pc.	
		1	0,10	2000-34

Socket n / t 2x2P + Z 250V for mounting two additional power supplies in interior switch-gear MSF






MSF N TERMINAL 5X10 / 16mm² WITH THE OPTION OF MOUNTING ON TS35

Type	Color	Pack.	Weigh	Index
Zacisk N	Blue RAL 5005	1 pc.	kg/100 pc.	
		1	-	2000-23

N terminal 5x (+ 2x10mm² 3x16mm²) with the option of mounting on TS35.




2000-06

TERMINAL TS35

Type	Color	Pack.	Weigh	Index
2 x 5 -way	Blue RAL 5005	1 pc.	kg/100 pc.	
7-way	Blue RAL 5005	1	-	2000-06
12-way	Blue RAL 5005	1	-	2000-07
				2000-08

Complete terminal block anchored on TH35 rail mounting allows for additional residual current circuit




2000-06



MSF BRACKET TERMINAL BLOCKS FROM L4 TO L26.

Type	Color	Pack.	Weight	Index
Bracket	Blue RAL 5005	1 pc.	kg/1 pc.	
		1	0,04	2000-22

Bracket terminal blocks from L4 to L26.
Complete overlay assay autopsy.




2000-16

MSF BRASS STRIP

Type	Pack.	Weigh	Index
	1 pc.	kg/100 pc.	
L-5	1	-	2000-16
L-7	1	-	2000-17
L-15	1	-	2000-18
L-18	1	-	2000-19
L-23	1	-	2000-20
L-26	1	-	2000-21

Brass strip.



2000-16

Accessories Self-locking bars

NEW



SELF-LOCKING BAR KSK-2N/2PE-KLV Y7

Type	Color	Pack.	Weight	Index
KSK	Green RAL 6018	1 pc.	kg/1 pc.	178898

2x(2,5-25 mm² + 14x0,5-4 mm²)

NEW



SELF-LOCKING BAR KSK-4N-KLV Y7

Type	Color	Pack.	Weight	Index
KSK	Green RAL 6018	1 pc.	kg/1 pc.	178899

4x(2,5-25 mm² + 28x0,5-4 mm²)

NEW



SELF-LOCKING BAR KSK-2N/2N-KLV Y7

Type	Color	Pack.	Weight	Index
KSK	Green RAL 6018	1 pc.	kg/1 pc.	178901

4x(2,5-25mm² + 28x0,5-4 mm²)

NEW




SELF-LOCKING BAR KSK-3N/1N-KLV Y7

Type	Color	Pack.	Weight	Index
KSK	Blue RAL 5005	1 pc.	kg/1 pc.	178900

4x(2,5-25 mm² + 28x0,5-4 mm²)

NEW



SELF-LOCKING BAR KSK-4PE-KLV Y7

Type	Color	Pack.	Weight	Index
KSK	Green RAL 6018	1 pc.	kg/1 pc.	178902

4x(2,5 mm² + 28x0,5 mm²)



SELF-LOCKING BAR KSK-N Y7

Type	Color	Pack.	Weight	Index
KSK	Blue RAL 5005	1 pc.	kg/1 pc.	178903

1x(2,5 mm² + 7x0,5-4 mm²)



SELF-LOCKING BAR KSK-PE Y7

Type	Color	Pack.	Weight	Index
KSK	Green RAL 6018	1 pc.	kg/1 pc.	178904

1x(2,5-25 mm² + 7x0,5-4 mm²)



SELF-LOCKING BAR KSK-KLV Y7

Type	Color	Pack.	Weight	Index
KSK	Grey RAL 7035	1 pc.	kg/1 pc.	178905



Max. 4x KSK-N(PE)



MSF COMPLETE HANDLE WITH THE HANDLE / WITHOUT KEY

Type	Color	Pack.	Weight	Index
Handle	White RAL 9016	1 pc.	kg/1 pc.	
		1	0,03	2000-24


Spare part - complete handle with the handle / without key / used for destruction or loss, originally supplied with the switchgear



MSF COMPLETE GROMMET

Type	Color	Pack.	Weight	Index
Grommet	Gray RAL 9035	1 pc.	kg/1 pc.	
		1	0,08	2000-25


Spare part - Complete grommet with screws for entering Wiring used in casing of loss originally supplied with the switchgear



MSF HINGES WITH METAL AXLE RIGHT AND LEFT

Type	Color	Pack.	Weight	Index
MSF hinges	White RAL 9016	1 pc.	kg/1 pc.	
		2	0,09	2000-26


MSF hinges with metal axle right and left the door assembly



MSF RAIL 14 MOD TS35

Type	Color	Pack.	Weight	Index
DIN 35	-	1 pc.	kg/1 pc.	
		1	0,89	2000-29

MSF rail 14 mod TS35



MSF PAW MOUNTING TO THE WALL SET. 4 PCS.

Type	Color	Pack.	Weight	Index
Paw mounting	-	1 pc.	kg/1 pc.	
		4	0,92	2000-30


MSF paw mounting to the wall set. 4 pcs.



MSF METAL FASTENERS 1 pc. FOR CONNECTING SWITCHGEAR

Type	Color	Pack.	Weight	Index
MSF fasteners	-	1 pc.	kg/1 pc.	
		2	0,03	2000-31

Metal fasteners for connecting switchgear MSF vertically or horizontally





Features of KRAFT enclosures

- enclosures surface-mounted and flush mounted
- door mounting left / right
- PE+N terminals included
- 1 – 7 rows
- powder-coated metal enclosures
- IP30
- IK10
- lock with key as standard
- color white RAL 9003
- maximum number of modules 168
- weakenings in side walls
- enclosures with depth up to 150 mm



KRAFT
steel enclosures

Steel enclosures **KRAFT**



Steel enclosures **KRAFT**

Flush mounted


IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK RP 1X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
1/24	RP 1x24	White RAL 9003	tak	1 pc.	kg/1 pc.	3

Modules: 24
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 243x543x146 mm




IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK RP 2X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/48	RP 2x24	White RAL 9003	tak	1 pc.	kg/1 pc.	5

Modules: 48
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 393x543x146 mm




IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK RP 3X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
3/72	RP3x24	White RAL 9003	tak	1 pc.	kg/1 pc.	11

Modules: 72
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 543x543x146 mm




IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK RP 4X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
4/96	RP4x24	White RAL 9003	tak	1 pc.	kg/1 pc.	14

Modules: 96
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 693x543x146 mm



Steel enclosures **KRAFT**
Flush mounted


IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK
RP 5X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
5/120	RP 5x24	White RAL 9003	tak	1	15	4005-00

Modules: 120
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 843x543x146 mm




IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK
RP 6X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
6/144	RP 6x24	White RAL 9003	tak	1	18	4006-00

Modules: 144
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 993x543x146 mm




IP 30 400 V STEEL CE




KRAFT MODULAR ENCLOSURES WITH KEY LOCK
RP 7X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
7/168	RP 7x24	White RAL 9003	tak	1	21	4007-00

Modules: 168
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 1143x543x146 mm



key lock



enclosures RP



RAL 9003
powder-coated

Steel enclosures **KRAFT** surface-mounted

IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK RN 1X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
1/24	RN 1x24	White RAL 9003	tak	1 pc.	kg/1 pc.	4001-11

Modules: 24
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Weaknesses in the side walls for cable routing
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 200x500x150 mm




IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK RN 2X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/24	RN 2x24	White RAL 9003	tak	1 pc.	kg/1 pc.	4002-11

Modules: 24
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Weaknesses in the side walls for cable routing
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 350x500x150 mm




IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK RN 3X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
3/72	RN 3x24	White RAL 9003	tak	1 pc.	kg/1 pc.	4003-11

Modules: 72
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Weaknesses in the side walls for cable routing
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 500x500x150 mm




IP 30 400 V STEEL CE



KRAFT MODULAR ENCLOSURES WITH KEY LOCK RN 4X24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
4/96	RN 4x24	White RAL 9003	tak	1 pc.	kg/1 pc.	4004-11

Modules: 96
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Weaknesses in the side walls for cable routing
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 650x500x150 mm




Steel enclosures **KRAFT**
surface-mounted



KRAFT MODULAR ENCLOSURES WITH KEY LOCK
RN 5x24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
5/120	RN 5x24	White RAL 9003	tak	1	15	4005-11


Modules: 120
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Weaknesses in the side walls for cable routing
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 800x500x150 mm



KRAFT MODULAR ENCLOSURES WITH KEY LOCK
RN 6x24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
6/144	RN 6x24	White RAL 9003	tak	1	18	4006-11


Modules: 144
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Weaknesses in the side walls for cable routing
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 950x500x150 mm



KRAFT MODULAR ENCLOSURES WITH KEY LOCK
RN 7x24 PE+N IP30

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
7/168	RN 7x24	White RAL 9003	tak	1	21	4007-11

Modules: 168
PE and N terminals included
Mounting rails DIN 35- galvanized
Door fully, key lockable
Door universal left/right with quick release hinges
Quick release bezels
Weaknesses in the side walls for cable routing
Color: RAL 9003
Protection degree: IP 30
NORM: PN-EN 62208:2011
Outside dimensions: 1100x500x150 mm



key lock



enclosures RN



RAL 9003
powder-coated



ECONOMIC BOX

residential enclosures

Protection degree	IP 40
Material Door/Enclosures	ABS / PS
Impact resistance	IK 05
Thermal condition	-20°C +70°C
Thermal test	70°C
NORM	PN-EN 62208:2011 PN-EN 60670-24:2013



- Degree protection IP 40
- protection class II
- range 1 to 3 row
- 6, 8, 12, 24, 36 – mod.

- standard included terminal bars PE + N
- 2 colours doors available
- key lock option




Casing white color RAL 9003




Terminal bars PE+N included



Sealing option

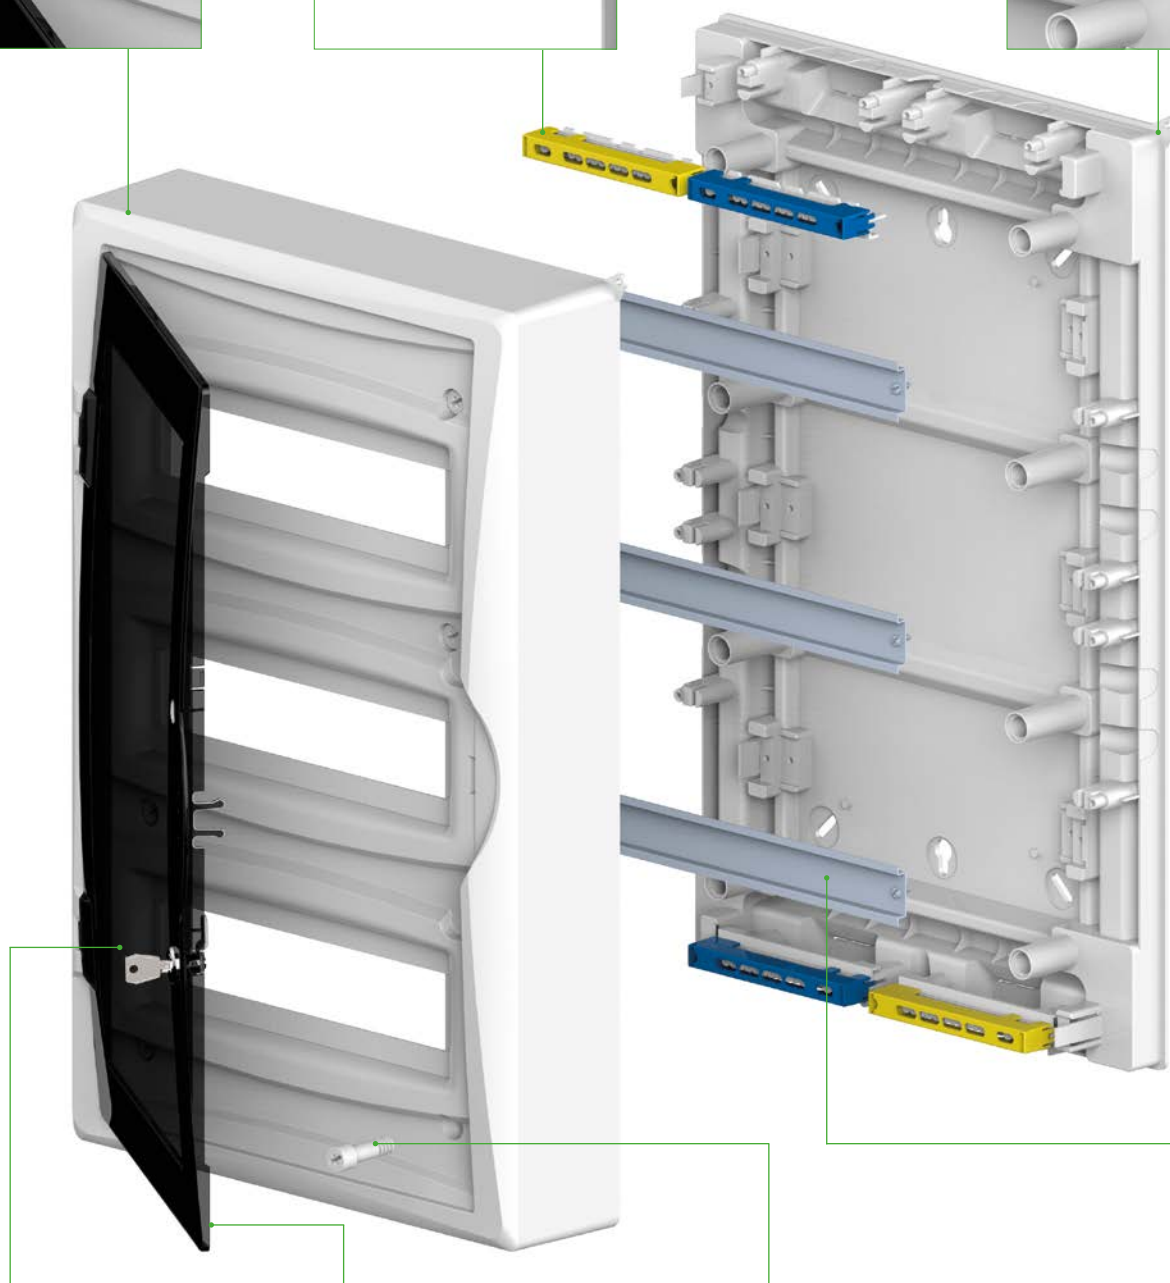

Key lock option



Transparent door or door the same colour as casing



New screw



New metal rail TS since 12mod

SURFACE-MOUNTED ENCLOSURES **ECONOMIC BOX™ IP 40**


IP 40 IK 05 400 V PS



ECONOMIC BOX™ RN 1x6 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index old	Index new
1x6	RN 1x6	White	tak	1 pc.	kg/1 pc.	0606-00	2501-00
1x6	RN 1x6	Transp.	tak	1	0,3	0606-01	2501-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 1x(3x10 mm² + 2x16 mm²)
PE 1x(3x10 mm² + 2x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 192x198x96 mm




IP 40 IK 05 400 V PS



ECONOMIC BOX™ RN 1x8 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index old	Index new
1x8	RN 1x8	White	tak	1 pc.	kg/1 pc.	0614-00	2502-00
1x8	RN 1x8	Transp.	tak	1	0,45	0614-01	2502-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 1x(5x10 mm² + 2x16 mm²)
PE 1x(5x10 mm² + 2x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 228x198x96 mm




IP 40 IK 05 400 V PS



ECONOMIC BOX™ RN 1x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index old	Index new
1x12	RN 1x12	White	tak	1 pc.	kg/1 pc.	0640-00	2503-00
1x12	RN 1x12	Transp.	tak	1	0,76	0640-01	2503-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 1x(3x10 mm² + 6x16 mm²)
PE 1x(3x10 mm² + 6x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 298x198x96 mm




IP 40 IK 05 400 V PS



ECONOMIC BOX™ RN 2x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index old	Index new
2x12	RN 2x12	White	tak	1 pc.	kg/1 pc.	0608-00	2505-00
2x12	RN 2x12	Transp.	tak	1	2,00	0608-01	2505-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 2x(3x10 mm² + 6x16 mm²)
PE 1x(3x10 mm² + 6x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 354x434x105 mm




IP 40 IK 05 400 V PS



ECONOMIC BOX™ RN 3x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index old	Index new
3x12	RN 3x12	White	tak	1 pc.	kg/1 pc.	0610-00	2506-00
3x12	RN 3x12	Transp.	tak	1	3,0	0610-01	2506-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 2x(3x10 mm² + 6x16 mm²)
PE 2x(3x10 mm² + 6x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 354x560x105 mm



MULTIMEDIA ENCLOSURES ECONOMIC BOX™ IP 40


IP 40 IK 05 400 V PS



ECONOMIC BOX™ MULTIMEDIA RN 2x12

Type	Door color	Pack.	Weight	Index
RN 2/24	White	1 pc.	kg/1 pc.	new
RN 2/24	Transp.	1	2	2505-20
RN 2/24	Transp.	1	2	2505-21

Protection degree IP 40, rated voltage 400 V AC
Includes socket 2P+Z 2P+Z 16A/250V NORM: PN-IEC-60884-1,
rail TS 35 – 1pc, mounting plate with holes for mounting devices: NORM:IEC/EN 60670-24
Dimensions: 360x434x105 mm




IP 40 IK 05 400 V PS



ECONOMIC BOX™ MULTIMEDIA RN 3x12

Type	Door color	Pack.	Weight	Index
RN 3/36	White	1 pc.	kg/1 pc.	new
RN 3/36	Transp.	1	3	2506-20
RN 3/36	Transp.	1	3	2506-21


Protection degree IP 40, rated voltage 400 V AC
Includes socket 2P+Z 16A/250V NORM: PN-IEC-60884-1,
rail TS 35 – 1pc, mounting plate with holes for mounting devices: NORM:IEC/EN 60670-24
Dimensions: 354x560x107 mm




new patch panel in standard version
Index: 2000-46

Casing white color RAL 9003

new screw

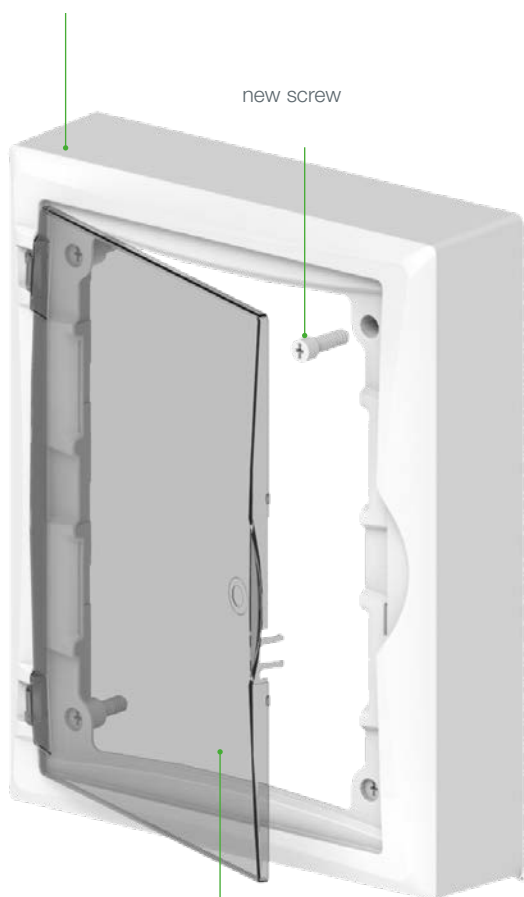

Transparent door or door the same colour as casing

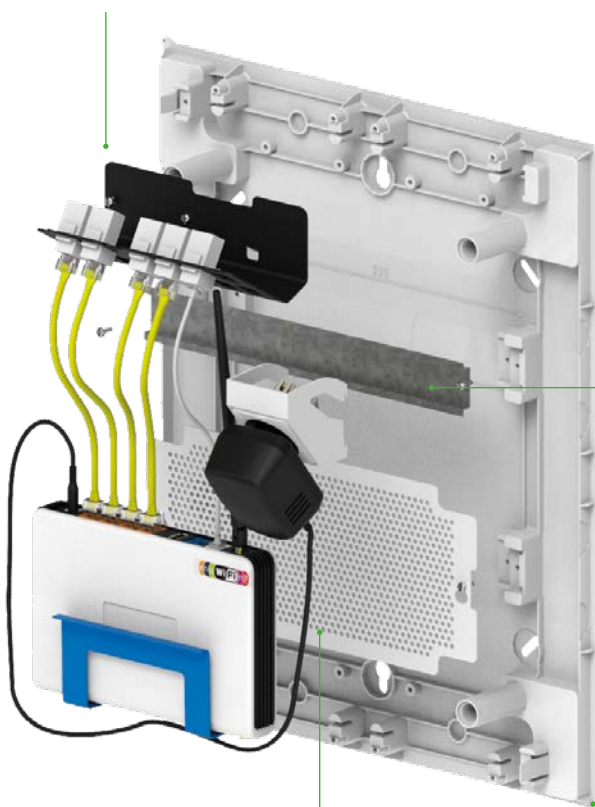

mounting plate microperforated
Index: 2000-27

Flexible configuration and wiring of enclosures

Sealing option

Protection degree	IP 40
Material Door/Cover/Enclosure	PC/PS/PP FR
Impact resistance	IK 05
Thermal condition	-20°C +70°C
Thermal test	70°C
Norm	PN-EN 62208:2011 PN-EN 60670-24:2013



- Degree protection IP 40
- protection class II
- range 1 to 3 rows
- 6, 8, 12, 24, 36 – mod.
- standard included

- terminal bars PE + N
- 2 colours doors available
- modern design
- key lock option

FLUSH MOUNTED ENCLOSURES **ECONOMIC BOX™ IP 40**

Casing white color RAL 9003




Hardened steel screws for fast and solid assembly



Terminals bars PE+E



Rigid casing flush mounted version

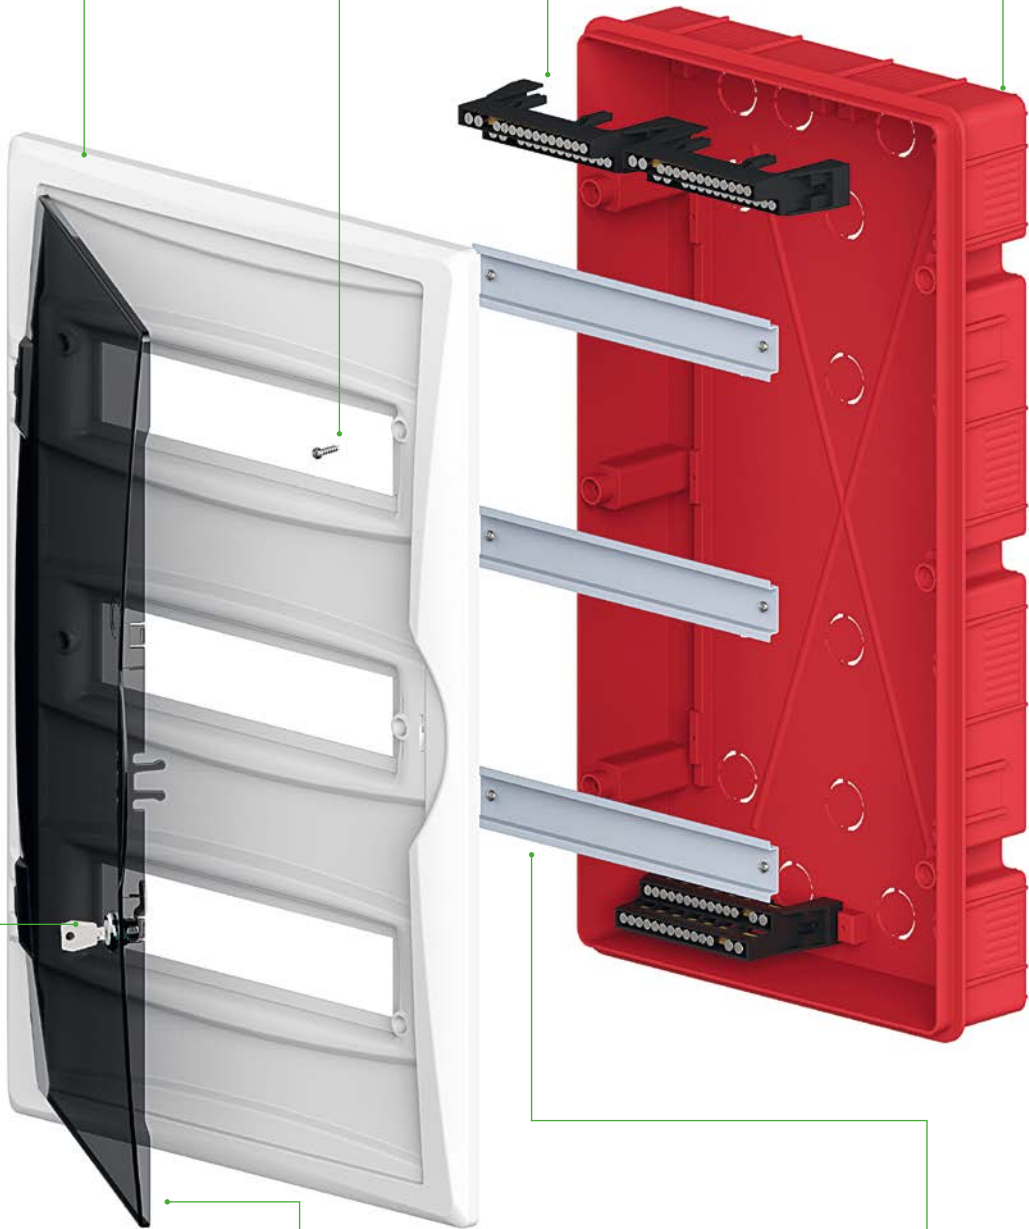

Key lock option



Doors color Transp.



Metal TS rail

FLUSH MOUNTED ENCLOSURES **ECONOMIC BOX™ IP 40**


IP 40 **IK 05** **400 V** **PS**



ECONOMIC BOX™ RP 1x6 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index	Index
1/6	RP 1x6	White*	tak	1 pc.	kg/1 pc.	old	new
1/6	RP 1x6	Transp.	tak	1	0,6	0680-00	2511-00
						0680-01	2511-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 1x(3x10 mm² + 2x16 mm²)
PE 1x(3x10 mm² + 2x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 270x240x106 mm




IP 40 **IK 05** **400 V** **PS**



ECONOMIC BOX™ RP 1x8 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index	Index
1/8	RP 1x8	White*	tak	1 pc.	kg/1 pc.	old	new
1/8	RP 1x8	Transp.	tak	1	0,7	0681-00	2512-00
						0681-01	2512-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 1x(5x10 mm² + 2x16 mm²)
PE 1x(5x10 mm² + 2x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 300x240x102 mm




IP 40 **IK 05** **400 V** **PS**



ECONOMIC BOX™ RP 1x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index	Index
1/12	RP 1x12	White*	tak	1 pc.	kg/1 pc.	old	new
1/12	RP 1x12	Transp.	tak	1	1,1	0682-00	2513-00
						0682-01	2513-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 1x(7x10 mm² + 2x16 mm²)
PE 1x(7x10 mm² + 2x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 360x240x106 mm




IP 40 **IK 05** **400 V** **PS**



ECONOMIC BOX™ RP 2x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index	Index
2/12	RP 2x12	White	tak	1 pc.	kg/1 pc.	old	new
2/12	RP 2x12	Transp.	tak	1	1,6	0684-00	2515-00
						0684-01	2515-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 2x(7x10 mm² + 2x16 mm²) PE 1x(7x10 mm² + 2x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 350x430x95 mm




IP 40 **IK 05** **400 V** **PS**



ECONOMIC BOX™ RP 3x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index	Index
3/12	RP 3x12	White	tak	1 pc.	kg/1 pc.	old	
3/12	RP 3x12	Transp.	tak	1	2,4	0685-00	2516-00
						0685-01	2516-01

Protection degree IP 40, rated voltage 400 V AC
Terminal blocks included
N 2x(7x10 mm² + 2x16 mm²)
PE 2x(7x10 mm² + 2x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 350x560x102 mm





MERIVA™ IP 40

Developer's enclosures

Protection degree	IP 40
Material Door/Case	ABS
Impact resistance	IK 08
Thermal condition	-20°C +70°C
Thermal test	70°C
Norm	PN-EN 62208:2011 PN-EN 60670-24:2013



MERIVA™

New developer's enclosures

Enclosures multi-media and electrical version plastic made

- residential enclosures electrical and multi-media version plastic made
- made high quality ABS
- degree protection IP 40
- protection class II
- color RAL 9003 (White)
- terminal bars PE + N into support
- surface and flush mounted version
- 2 and 3 row version (2x24,3x36 mod)
- 12 mod serie
- universal left/right door
- door colour the same as enclosure




door colour the same as casing
colour White RAL 9003

screw

unified upper cover inside

terminal bars PE+N into
support as optional solution

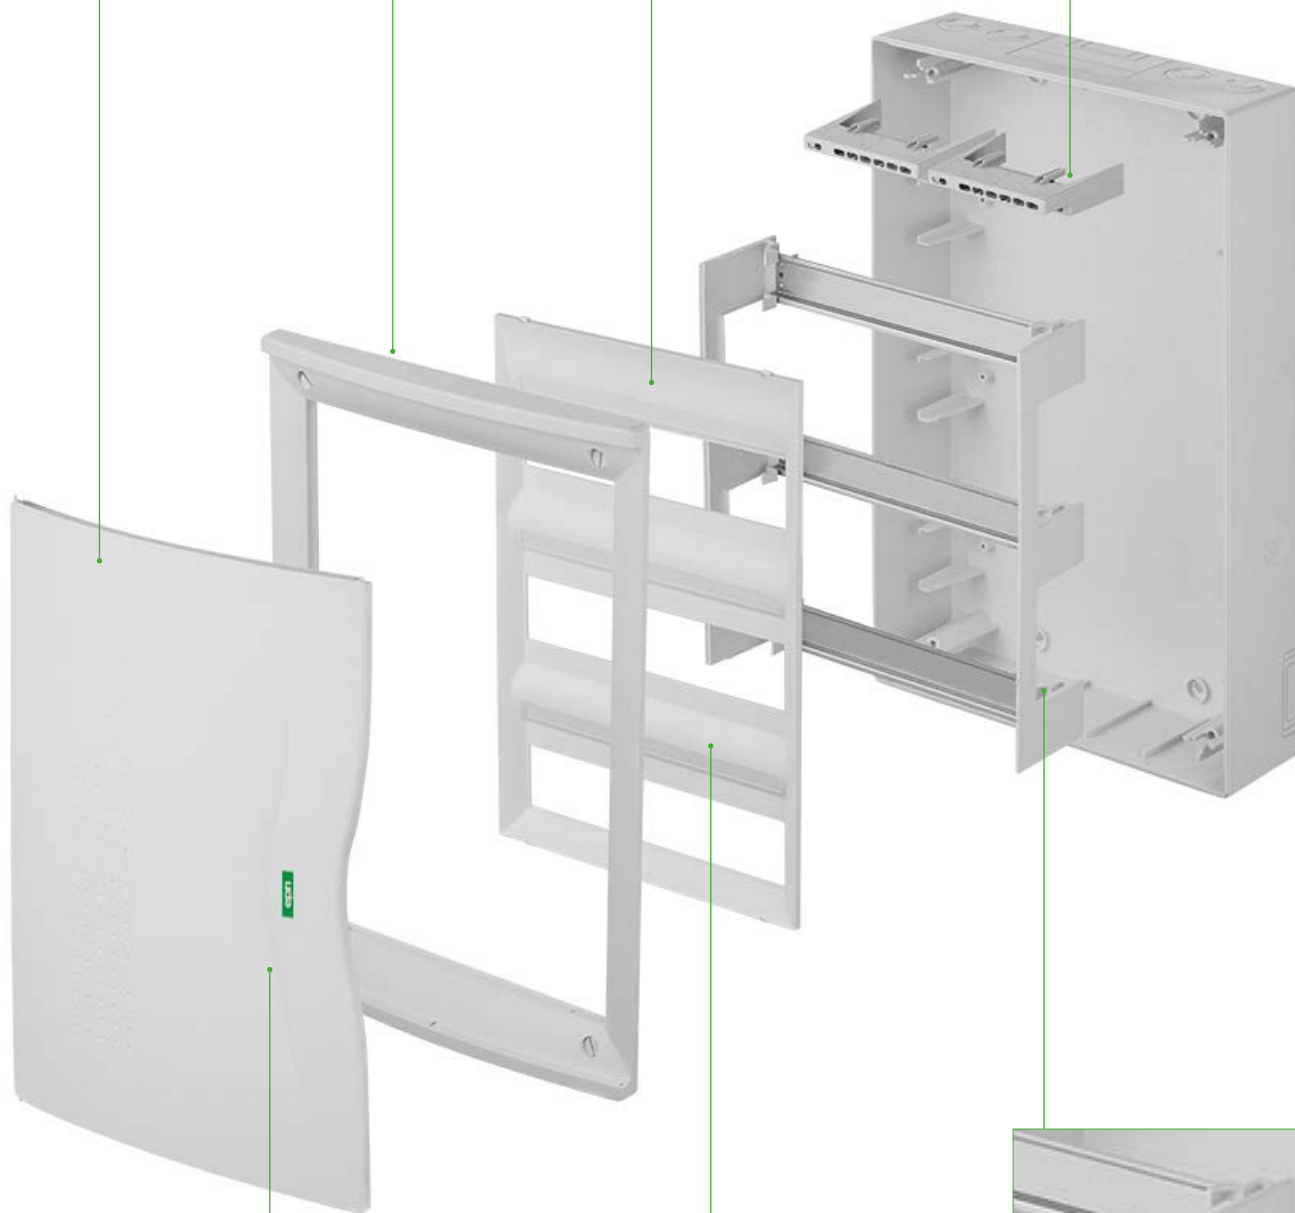

universal left /right doors

place for MCB's descriptions

assembly kit TH DIN rail system

MERIVA IP40 SURFACE MOUNTED

IP
40
IK
08
400
V



MERIVA RN 2x24 IP 40

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
2/24	RN 2/24	White		1	2,00	3605-00

Protection degree IP 40, rated voltage 400 V AC, II protection class


Additional option:

PE+N connection strips in bracket

N/PE 1x(6x10 mm² + 8x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 350 x 310 x 110 mm



IP
40
IK
08
400
V



MERIVA RN 3x36 IP 40

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
3/36	RN 3/36	White		1	2,80	3606-00

Protection degree IP 40, rated voltage 400 V AC, II protection class


Additional option:

PE+N connection strips in bracket

N/PE 1x(6x10 mm² + 8x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 460 x 310 x 110 mm



IP
40
IK
08
400
V




MERIVA RN 2x24 MULTIMEDIA

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
2/24	RN 2/24	White		1	2,00	3605-20

Protection degree IP 40, rated voltage 400V AC.

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 350 x 310 x 110 mm



IP
40
IK
08
400
V




MERIVA RN 3x36 MULTIMEDIA

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index
3/36	RN 3/36	White		1	3,00	3606-20

Protection degree IP 40, rated voltage 400V AC.

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 460 x 310 x 110 mm



MERIVA IP40 FLUSH MOUNTED

IP
40
IK
08
400
V



MERIVA RP 2x24 IP 40

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/24	RP 2/24	White		1 pc.	kg/1 pc.	3615-00

Protection degree IP 40, rated voltage 400V AC, II protection class


Additional option:

PE+N connection strips in bracket

N/PE 1x(6x10 mm² + 8x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 350 x 310 x 110 mm



IP
40
IK
08
400
V



MERIVA RP 3x36 IP 40

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
3/36	RP 3/36	White		1 pc.	kg/1 pc.	3616-00

Protection degree IP 40, rated voltage 400V AC, II protection class


Additional option:

PE+N connection strips in bracket

N/PE 1x(6x10 mm² + 8x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 460 x 310 x 110 mm



IP
40
IK
08
400
V




MERIVA RP 2x24 MULTIMEDIA

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/24	RP 2/24	White		1 pc.	kg/1 pc.	3615-20

Protection degree IP 40, rated voltage 400V AC.

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 350 x 310 x 110 mm



IP
40
IK
08
400
V




MERIVA RP 3x36 MULTIMEDIA

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
3/36	RP 3/36	White		1 pc.	kg/1 pc.	3616-20

Protection degree IP 40, rated voltage 400V AC.

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 460 x 310 x 110 mm



MERIVA ENCLOSURE ACCESSORIES

IP 40 IK 08 400 V



MERIVA BRACKET WITH A TERMINAL BLOCK

Rows / modules	Type	Color	Term PE+N	Pack.	Weight	Index
-		-		1 pc.	kg/1 pc.	3600-10

Rated voltage 400V AC, II protection class
NORM: PN-EN 61439-3
1x(6x10 mm² + 8x16 mm²)

IP 40 IK 08 400 V



TERMINAL BLOCK L-14 BRASS

Rows / modules	Type	Color	Term PE+N	Pack.	Weight	Index
-		-		1 pc.	kg/1 pc.	3600-11

Rated voltage 400V AC.
NORM: PN-EN 61439-3
1x(6x10 mm² + 8x16 mm²)

IP 40 IK 08 400 V



MERIVA BRACKET WITHOUT A TERMINAL BLOCK

Rows / modules	Type	Color	Term PE+N	Pack.	Weight	Index
-		-		1 pc.	kg/1 pc.	3600-12


Rated voltage 400V AC, II protection class
NORM: PN-EN 61439-3



MERIVA SOCKET 45X45 16A/250V

Type	Color	Pack.	Weight	Index
45x45 2P+Z	White RAL 9016	bulk	kg/100 pc.	2000-42

Socket 45x45 2P+Z 16A/250V white.
Socket for patch-panel MERIVA.



MERIVA PATCH - PANEL MULTIMEDIA 12-PORT STEEL

Rows / modules	Type	Color	Term PE+N	Pack.	Weight	Index
-	12-port	-		1 pc.	kg/1 pc.	3600-46

Steel panel
Dimensions: 276x164x1,5 mm



MERIVA MOUNTING PLATE PERFORATED

Rows / modules	Type	Color	Term PE+N	Pack.	Weight	Index
-		-		1 pc.	kg/1 pc.	3600-27

Steel panel
Dimensions: 234x225x1,5 mm



GREEN BOX IP 40

Enclosures

Protection degree	IP 40
Material Door/Cover/Enclosures	PC/PS
Impact resistance	IK 05
Thermal condition	-20°C +70°C
Thermal test	70°C
Norm	PN-EN 62208:2011 PN-EN 60670-24:2013



- degree protection IP 40
- protection class II
- till 22 mod in row
- 6, 8+2, 12+2, 14+2, 20+2 – mod.
- standard included terminal bars PE + N

- doors colours available:
 - white
 - transparent smoked
 - transparent green




Terminal bar PE+N

til 22 mod into row



3 colours doors
available:
- White
- Transp. green
- Transp.

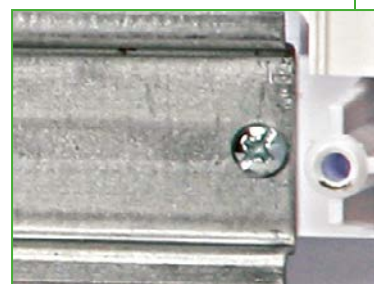

TS 35 rail

ENCLOSURES GREEN BOX IP 40


IP 40 IK 05 400 V PS



GREEN BOX RN 1x6 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index old	Index new
1/6	RN 1/6	White	tak	1	0,5	0688-00	2351-00
1/6	RN 1/6	Transp. green	tak	1	0,5	0688-01	2351-02
1/6	RN 1/6	Transp.	tak	1	0,5	0688-02	2351-01

Protection degree IP 40, rated voltage 400V, II protection class
Terminal blocks included
N 1x(3x10mm² + 2x16mm²)
PE 1x(3x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 171x225x116 mm




IP 40 IK 05 400 V PS



GREEN BOX RN 1x8+2 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index old	Index new
1/8+2	RN 1/8+2	White	tak	1	0,7	0689-00	2352-00
1/8+2	RN 1/8+2	Transp. green	tak	1	0,7	0689-01	2352-02
1/8+2	RN 1/8+2	Transp.	tak	1	0,7	0689-02	2352-01

Protection degree IP 40, rated voltage 400V, II protection class
Terminal blocks included
N 1x(5x10mm² + 2x16mm²)
PE 1x(5x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 245x225x116 mm




IP 40 IK 05 400 V PS



GREEN BOX RN 1x12+2 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index old	Index new
1/12+2	RN 1/12+2	White	tak	1	1,0	0690-00	2353-00
1/12+2	RN 1/12+2	Transp. green	tak	1	1,0	0690-01	2353-02
1/12+2	RN 1/12+2	Transp.	tak	1	1,0	0690-02	2353-01

Protection degree IP 40, rated voltage 400V, II protection class
Terminal blocks included
N 1x(7x10mm² + 2x16mm²)
PE 1x(7x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 315x225x116 mm




IP 40 IK 05 400 V PS



GREEN BOX RN 1x14+2 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index old	Index new
1/14+2	RN 1/14+2	White	tak	1	1,0	0691-00	2354-00
1/14+2	RN 1/14+2	Transp. green	tak	1	1,0	0691-01	2354-02
1/14+2	RN 1/14+2	Transp.	tak	1	1,0	0691-02	2354-01

Protection degree IP 40, rated voltage 400V, II protection class
Terminal blocks included
N 1x(12x10mm² + 2x16mm²)
PE 1x(12x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 350x225x116 mm




IP 40 IK 05 400 V PS



GREEN BOX RN 1x20+2 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index old	Index new
1/20+2	RN 1/20+2	White	tak	1	1,3	0692-00	2355-00
1/20+2	RN 1/20+2	Transp. green	tak	1	1,3	0692-01	2355-02
1/20+2	RN 1/20+2	Transp.	tak	1	1,3	0692-02	2355-01

Protection degree IP 40, rated voltage 400V, II protection class
Terminal blocks included
N 1x(12x10mm² + 2x16mm²)
PE 1x(12x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 456x225x116 mm





ELEGANT
residential enclosures

Protection degree	IP 40
Material	PS
Impact resistance	IK 05
Thermal condition	-20°C +70°C
Thermal test	70°C
Norm	PN-EN 62208:2011 PN-EN 60670-24:2013



White doors on individual order. Index -00



- degree protection IP 40
- protection class II
- 1 to 3 rows
- 5, 8, 12, 18, 24, 36, 54 – mod.

- standard included terminal bars PE + N
- possibility sealing casing
- series 12 and 18 mod into row



Casing and doors
white RAL 9003



solid internal
top cover




Hardened steel screws
for fast and secure
installation



terminal strips PE + N
in the bracket



rigid housing
surface-mounted electric /
multimedia version

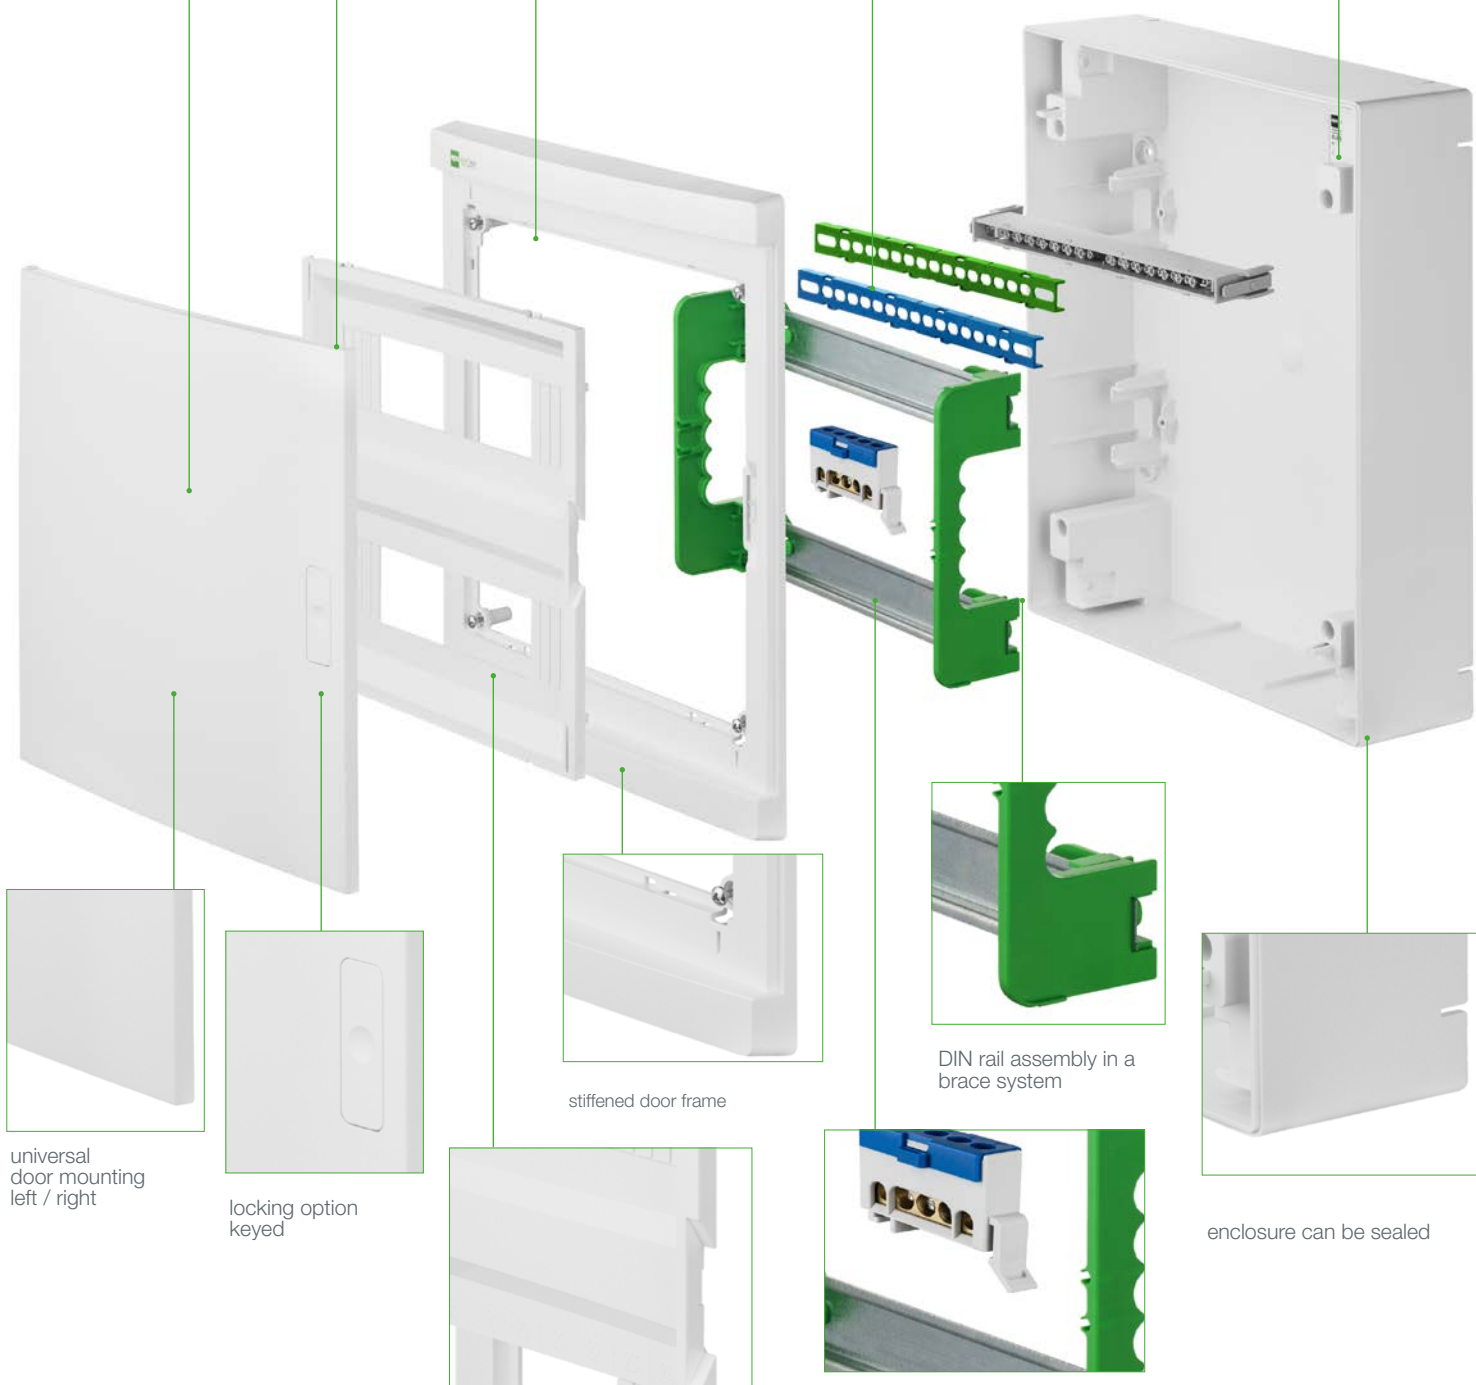

universal
door mounting
left / right



locking option
keyed



stiffened door frame



descriptive space
for labelling



DIN rail assembly in a
brace system



possibility of flexible arming and
wiring of enclosures, N terminal
5x10mm² included



enclosure can be sealed



SURFACE-MOUNTED ENCLOSURES ELEGANT IP 40


IP 40 IK 05 400 V PS



ELEGANT RN 1x5 IP 40

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index new
1/5	RN 1x5	Transp.	tak	3	0,3	2401-01

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.
Terminal blocks included
Terminal plate 1x10mm²
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 116x156x98 mm




IP 40 IK 05 400 V PS



ELEGANT RN 1x8 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index new
1/8	RN 1x8	Transp.	tak	1	0,55	2402-01

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.
Terminal blocks included
N 1x(5x10mm² + 2x16mm²)
PE 1x(5x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 195x195x98 mm




IP 40 IK 05 400 V PS



ELEGANT RN 1x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index new
1/12	RN 1x12	Transp.	tak	1	0,92	2403-01
1/12	RN 1x12	White	tak	1	0,92	2403-00

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.
Terminal blocks included
N 1x(3x10 mm² + 6x16 mm²)
PE 1x(3x10 mm² + 6x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 303x212x98 mm



IP 40 IK 05 400 V PS


NEW



ELEGANT RN 1x12 IP 40 (PE+N) NEW VERSION

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index new
1/12	RN 1x12	Transp.	tak	1	1,1	2423-01
1/12	RN 1x12	White	tak	1	1,1	2423-00

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.
Terminal blocks included
N 1x(3x10 mm² + 6x16 mm²)
PE 1x(3x10 mm² + 6x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 298x198x96 mm




IP 40 IK 05 400 V PS



ELEGANT RN 1x18 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index new
1/18	RN 1x18	Transp.	tak	1	1,32	2404-01
1/18	RN 1x18	White	tak	1	1,32	2404-00

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.
Terminal blocks included
N 1x(12x10 mm² + 2x16 mm²)
PE 1x(12x10 mm² + 2x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 406x260x98 mm



SURFACE-MOUNTED ENCLOSURES ELEGANT IP 40

IP 40 IK 05 400 V PS



ELEGANT RN 2x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
2/12	RN 2x12	Transp.	tak	1	1,55	2405-01
2/12	RN 2x12	White	tak	1	1,55	2405-00

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.


Terminal blocks included

N 2x(3x10 mm² + 6x16 mm²)

PE 1x(3x10 mm² + 6x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 303x407x98 mm



IP 40 IK 05 400 V PS



ELEGANT RN 2x18 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
2/18	RN 2x18	Transp.	tak	1	2,2	2407-01
2/18	RN 2x18	White	tak	1	2,2	2407-00

Protection degree IP 40, rated voltage 400V.

Sealing possibility casings.


Terminal blocks included

N 2x(6x10 mm² + 8x16 mm²)

PE 1x(6x10 mm² + 8x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 410x420x98 mm



IP 40 IK 05 400 V PS



ELEGANT RN 3x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
3/12	RN 3x12	Transp.	tak	1	2,2	2406-01
3/12	RN 3x12	White	tak	1	2,2	2406-00

Protection degree IP 40, rated voltage 400V.

Sealing possibility casings.


Terminal blocks included

N 2x(7x10 mm² + 2x16 mm²)

PE 2x(7x10 mm² + 2x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 303x550x98 mm



IP 40 IK 05 400 V PS



ELEGANT RN 3x18 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
3/18	RN 3x18	Transp.	tak	1	3,0	2408-01
3/18	RN 3x18	White	tak	1	3,0	2408-00

Protection degree IP 40, rated voltage 400V.

Sealing possibility casings.


Terminal blocks included


N 2x(12x10 mm² + 2x16 mm²)

PE 2x(12x10 mm² + 2x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 410x784x98 mm



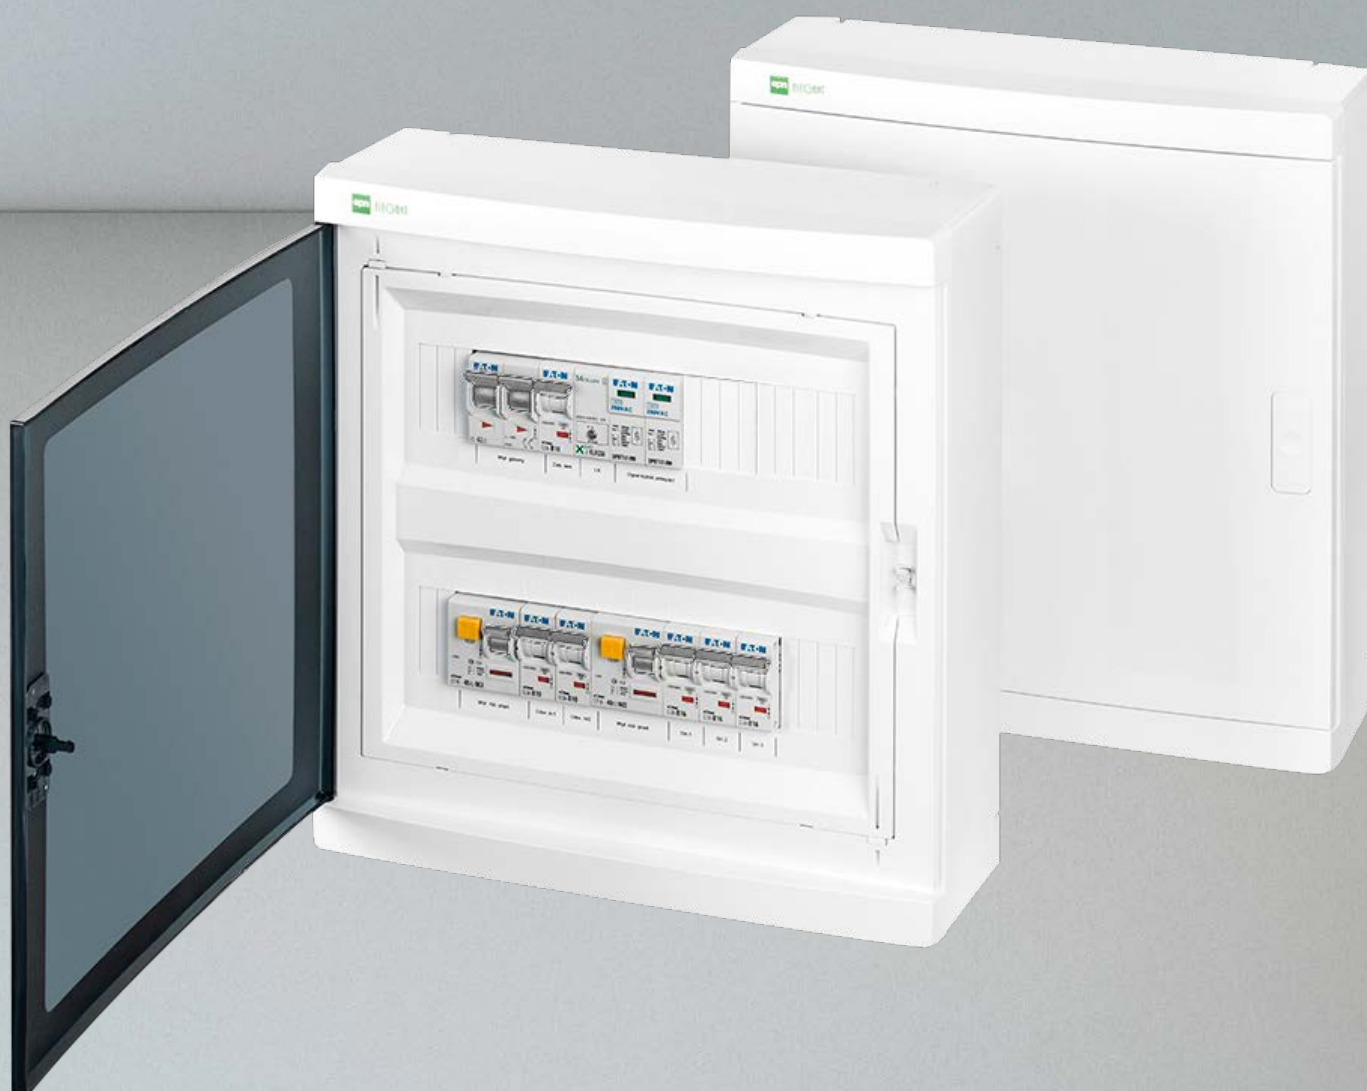

Features:

- II protection class
- IP 40
- 2 rows/12 mod (24mod)
- DIN rail mounting brackets
- removable cover with snap-on mechanism
- universal doors left/right version
- residential enclosures
- electrical and multimedia version
- possibility to connect switchboards vertically/horizontally by means of connecting clips
- PE+N terminals included
- housing color White RAL 9003
- white or smoky door

SURFACE-MOUNTED ENCLOSURES ELEGANT IP 40


IP 40 IK 05 400 V



ELEGANT RN 2X12 PE+N IP40 WHITE

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/12	RN 2x12	White	tak	1 pc.	kg/1 pc.	
				1	1,55	2425-00

II protection class, key lock option, enclosure sealable
Removable DIN rail harness system
Terminal blocks included
N 1x(4x16mm² + 4x10mm²) L8+L5
PE 1x(7x10mm² + 6x 16mm²) L13
N terminal L5 on the bus
NORM: IEC/EN 62208, IEC/EN 60670-24
Dimensions: 350x310x104 mm




IP 40 IK 05 400 V



ELEGANT RN 2X12 PE+N WHITE/TRANSP.

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/12	RN 2x12	Transp.	tak	1 pc.	kg/1 pc.	
				1	1,55	2425-01

II protection class, key lock option, enclosure sealable
Removable DIN rail harness system
Terminal blocks included
N 1x(4x16mm² + 4x10mm²)
PE 1x(7x10mm² + 6x 16mm²)
NORM: IEC/EN 62208, IEC/EN 60670-24
Dimensions: 350x310x104 mm




IP 40 IK 05 400 V



ELEGANT RN 2X12 MULTIMEDIA IP40 WHITE

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/12	RN 2x12	White	tak	1 pc.	kg/1 pc.	
				1	1,55	2425-20

II protection class, key lock option, enclosure sealing possible
The set includes perforated multimedia board, patchpanel, 45x45 2P+Z 16A 250V socket.
NORM: IEC/EN 62208, IEC/EN 60670-24
Dimensions: 350x310x104 mm




IP 40 IK 05 400 V



ELEGANT RN 2X12 MULTIMEDIA WHITE/TRANSP.

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/12	2x12	dymne	tak	1 pc.	kg/1 pc.	
				1	1,55	2425-21

II protection class, key lock option, enclosure sealing possible.
The set includes perforated multimedia board, patchpanel, 45x45 2P+Z 16A 250V socket.
NORM: IEC/EN 62208, IEC/EN 60670-24
Dimensions: 350x310x104 mm



FLUSH MOUNTED ENCLOSURES ELEGANT IP 40


IP 40 IK 05 400 V



ELEGANT RP 2X12 PE+N IP40 WHITE

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/12	RP 2x12	White	tak	1 pc.	kg/1 pc.	2435-00

II protection class
Key lock option, enclosure sealable
Removable DIN rail harness system
4 mounting brackets included
Terminal blocks included
N 1x(4x16mm² + 4x10mm²)
PE 1x(7x10mm² + 6x 16mm²)
N terminal L5 rail mounting.
NORM: IEC/EN 62208, IEC/EN 60670-24
Dimensions: 350x310x104 mm




IP 40 IK 05 400 V



ELEGANT RP 2X12 PE+N IP40 WHITE

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/12	RP 2x12	Transp.	tak	1 pc.	kg/1 pc.	2435-01

II protection class
Key lock option, enclosure sealable
Removable DIN rail harness system
4 mounting brackets included
Terminal blocks included
N 1x(4x16mm² + 4x10mm²)
PE 1x(7x10mm² + 6x 16mm²)
N terminal L5 rail mounting
NORM: IEC/EN 62208, IEC/EN 60670-24
Dimensions: 350x310x104 mm




IP 40 IK 05 400 V



ELEGANT MM RP 2X12 IP40 WHITE

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/12	RP 2x12	White	tak	1 pc.	kg/1 pc.	2435-20

Protection class IP 40, rated voltage 400V.
The set includes perforated multimedia board, patchpanel, 45x45 2P+Z 16A 250V socket.
Equipped with 4 mounting brackets
NORM: IEC/EN 62208, IEC/EN 60670-24
Dimensions: 350x310x104 mm




IP 40 IK 05 400 V




ELEGANT MM RP 2X12 IP40 TRANSP.

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/12	RP 2x12	Transp.	tak	1 pc.	kg/1 pc.	2435-21

Stopien ochrony IP 40, rated voltage 400V.
The set includes perforated multimedia board, patchpanel, 45x45 2P+Z 16A 250V socket.
Equipped with 4 mounting brackets
NORM: IEC/EN 62208, IEC/EN 60670-24
Dimensions: 350x310x104 mm




FLUSH MOUNTED ENCLOSURES ELEGANT IP 40




ELEGANT ZESPÓŁ LISTWY (1 X KASEJA, PE+N, 2 X NAKŁADKA)

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
Listwa	Green RAL 6018	1	-	2425-26



ELEGANT PŁYTA MONTAŻOWA PERFOROWANA 120X232X1MM RAL9016


Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
Płyta montażowa	White RAL 9016	1	-	2425-28



ELEGANT SPINKI ŁĄCZĄCE KPL. 2PC.

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
Spinka	Green RAL 6018	1	-	2425-31


Spinki do łączenia rozdzielnic ELEGANT w pionie lub w poziomie.



ELEGANT ZESPÓŁ ZAMKA METALOWEGO Z KLUCZYKIEM

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
Zamek z kluczami	-	1	-	2425-35

Zamek służący do trwałego zamknięcia drzwi rozdzielnic
Przed dostępem osób niepowołanych
W zestawie 2 pcs. kluczy



ELEGANT PATCH-PANEL MULTIMEDIALNY 12 PORTOWY METALOWY 232X140X1MM RAL9016

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
Patch panel	White RAL 9016	1	-	2425-46



GNIAZDO 45x45 16A/250V

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
45x45 2P+Z	White RAL 9016	1	-	2000-42

Gniazdo 45x45 2P+Z 16A/250V bez blokady, białe.
Gniazdo do montażu w patch-panelu ELEGANT.

ENCLOSURE ELEGANT IP40 FOR INDIVIDUAL ORDER

IP 40 IK 05 400 V PS



ELEGANT RN 1x8 (PE+N) IP 40

Rows / modules	Type	Door color	Color casing	Term PE+N	Pack.	Weight	Index nowy
1/8	RN 1x8	Transp.	cream RAL 1015*	tak	1 pc.	kg/1 pc.	2402-03

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.



Terminal blocks included

N 1x(5x10mm² + 2x16mm²)

PE 1x(5x10mm² + 2x16mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 195x195x98 mm



IP 40 IK 05 400 V PS



ELEGANT RN 1x8 (PE+N) IP 40

Rows / modules	Type	Door color	Color casing	Term PE+N	Pack.	Weight	Index new
1/8	RN 1x8	Transp.	brown RAL 8028*	tak	1 pc.	kg/1 pc.	2402-05

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.


Terminal blocks included

N 1x(5x10mm² + 2x16mm²)

PE 1x(5x10mm² + 2x16mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 195x195x98 mm



IP 40 IK 05 400 V PS



ELEGANT RN 1x8 (PE+N) IP 40

Rows / modules	Type	Door color	Color casing	Term PE+N	Pack.	Weight	Index new
1/8	RN 1x8	Transp.	silver RAL 9006*	tak	1 pc.	kg/1 pc.	2402-07

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.

Terminal blocks included



N 1x(5x10mm² + 2x16mm²)

PE 1x(5x10mm² + 2x16mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Powder coated casing.

Dimensions: 195x195x98 mm



IP 40 IK 05 400 V PS



ELEGANT RN 1x12 (PE+N) IP 40

Rows / modules	Type	Door color	Color casing	Term PE+N	Pack.	Weight	Index new
1/12	RN 1x12	Transp.	cream RAL 1015*	tak	1 pc.	kg/1 pc.	2403-03

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.



Terminal blocks included

N 1x(3x10 mm² + 6x16 mm²)

PE 1x(3x10 mm² + 6x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 303x212x98 mm



IP 40 IK 05 400 V PS



ELEGANT RN 1x12 (PE+N) IP 40

Rows / modules	Type	Door color	Color casing	Term PE+N	Pack.	Weight	Index new
1/12	RN 1x12	Transp.	brown RAL 8028*	tak	1 pc.	kg/1 pc.	2403-05

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.



Terminal blocks included

N 1x(3x10 mm² + 6x16 mm²)

PE 1x(3x10 mm² + 6x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Dimensions: 303x212x98 mm



IP 40 IK 05 400 V PS



ELEGANT RN 1x12 (PE+N) IP 40

Rows / modules	Type	Door color	Color casing	Term PE+N	Pack.	Weight	Index new
1/12	RN 1x12	Transp.	silver RAL 9006*	tak	1 pc.	kg/1 pc.	2403-07

Protection degree IP 40, rated voltage 400V. Sealing possibility casings.

Terminal blocks included



N 1x(3x10 mm² + 6x16 mm²)

PE 1x(3x10 mm² + 6x16 mm²)

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

Powder coated casing.

Dimensions: 303x212x98 mm



* On individual order

FLUSH MOUNTED ENCLOSURES ELEGANT IP 40


IP 40 IK 05 400 V PS



ELEGANT RP 1x5 IP 40

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index new
1/5	RP 1x5	Transp.	tak	3	kg/1 pc.	2411-01

Protection degree IP 40, rated voltage 400V
Terminal blocks included
Terminal plate 1x10mm²
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 116x156x93 mm




IP 40 IK 05 400 V PS



ELEGANT RP 1x8 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index new
1/8	RP 1x8	Transp.	tak	1	kg/1 pc.	2412-01

Protection degree IP 40, rated voltage 400V
Terminal blocks included
N 1x(5x10mm² + 2x16mm²)
PE 1x(5x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 195x195x90 mm




IP 40 IK 05 400 V PS



ELEGANT RP 1x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index new
1/12	RP 1x12	Transp.	tak	1	kg/1 pc.	2413-01
1/12	RP 1x12	White	tak	1	kg/1 pc.	2413-00

Protection degree IP 40, rated voltage 400V
Terminal blocks included
N 1x(7x10mm² + 2x16mm²)
PE 1x(7x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 303x214x104 mm




IP 40 IK 05 400 V PS



ELEGANT RP 1x18 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index new
1/18	RP 1x18	Transp.	tak	1	kg/1 pc.	2414-01
1/18	RP 1x18	White	tak	1	kg/1 pc.	2414-00

Protection degree IP 40, rated voltage 400V
Terminal blocks included
N 1x(12x10mm² + 2x16mm²)
PE 1x(12x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 409x260x95 mm



FLUSH MOUNTED ENCLOSURES ELEGANT IP 40


IP 40 IK 05 400 V PS



ELEGANT RP 2x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
2/12	RP 2x12	Transp.	tak	1	1,3	2415-01
2/12	RP 2x12	White	tak	1	1,3	2415-00

Protection degree IP 40, rated voltage 400V
Terminal blocks included
N 2x(7x10mm² + 2x16mm²)
PE 1x(7x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 303x407x99 mm




IP 40 IK 05 400 V PS



ELEGANT RP 2x18 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
2/18	RP 2x18	Transp.	tak	1	2,1	2417-01
2/18	RP 2x18	White	tak	1	2,1	2417-00

Protection degree IP 40, rated voltage 400V
Terminal blocks included
N 2x(12x10 mm² + 2x16 mm²)
PE 1x(12x10 mm² + 2x16 mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 409x430x95 mm



IP 40 IK 05 400 V PS 3X12



ELEGANT RP 3x12 IP 40 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack. 1 pc.	Weight kg/1 pc.	Index new
3/12	RP 3x12	Transp.	tak	1	2,0	2416-01
3/12	RP 3x12	White	tak	1	2,0	2416-00

Protection degree IP 40, rated voltage 400V
Terminal blocks included
N 2x(7x10mm² + 2x16mm²)
PE 2x(7x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 303x550x104 mm





EP-LUX Plus IP 55/65

hermetic enclosures

HERMETIC ENCLOSURES

EP-LUX PLUS IP 55/65

Protection degree	IP 55 / IP 65
Material	ABS
Impact resistance	IK 08
Color	RAL 7035 (jasnoszary)
Thermal condition	-20°C +70°C
Thermal test	70°C
Norm	PN-EN 62208:2011 PN-EN 60670-24:2013



- degree protection IP 55 / IP 65
- impact resistance IK08
- protection class II
- 1-4 rows

- 12 and 18 mod. in row serie
- 6, 8, 12, 18, 24, 36, 54, 72 – mod.
- standard included terminal bars PE + N
- key lock option



sealed door




terminal block PE+N equipped



large space for cables



sealing possibility

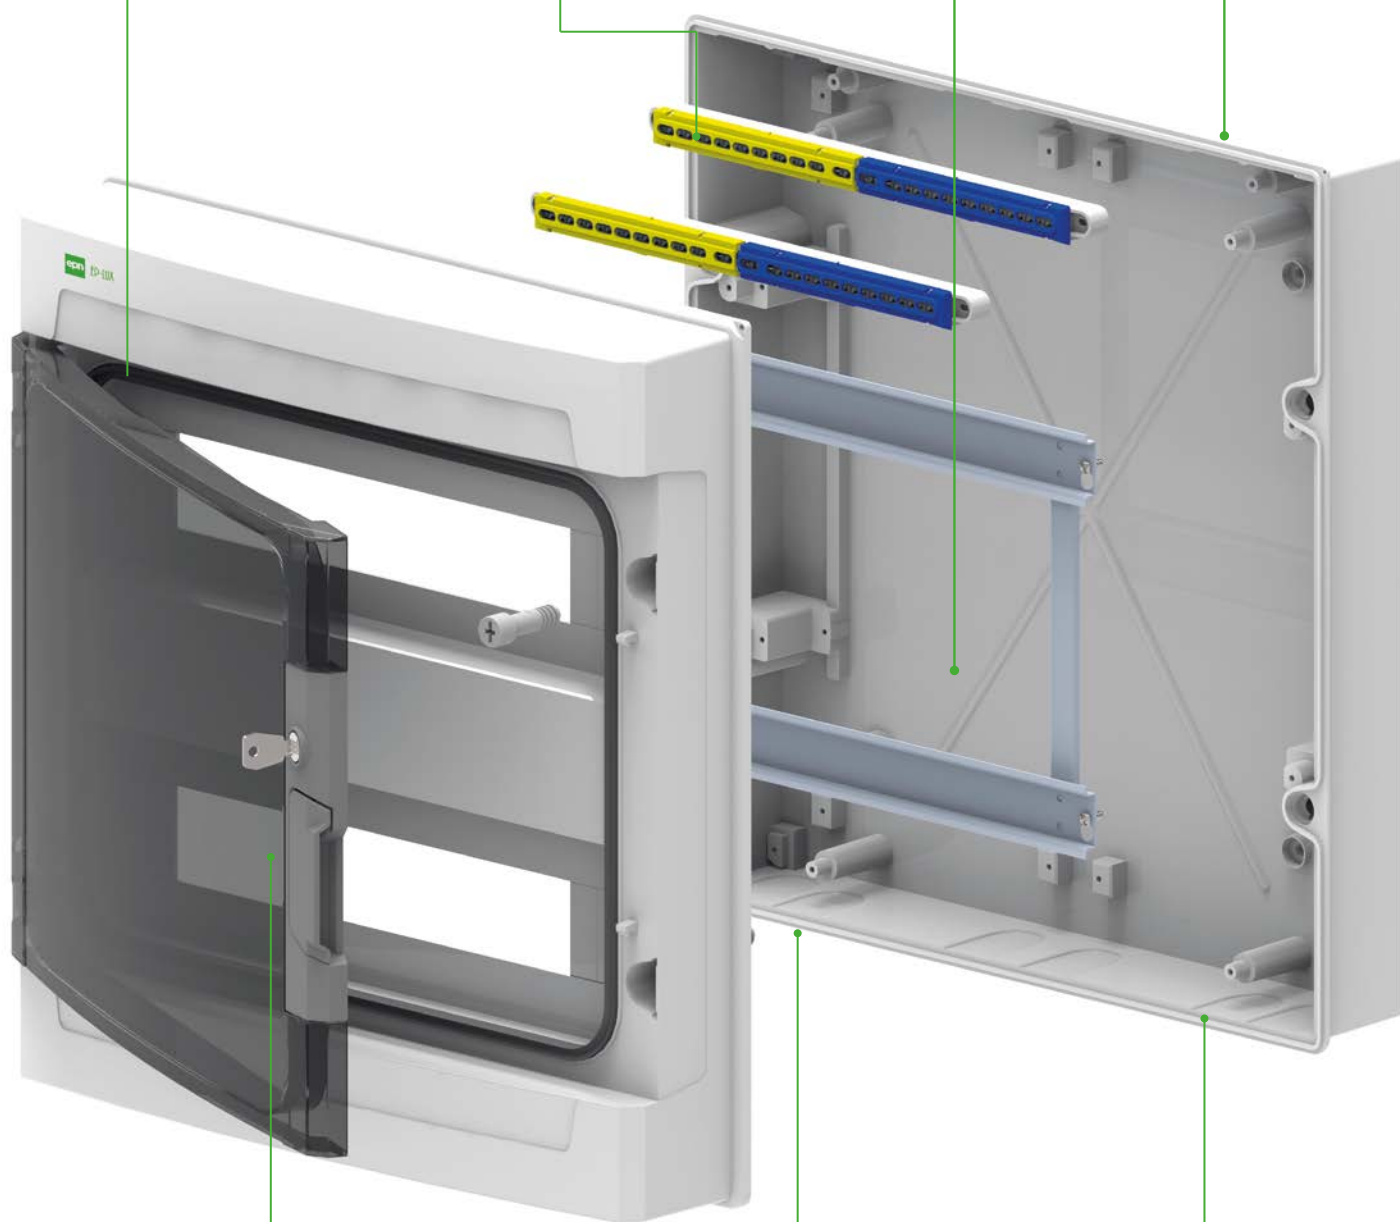

new system door locking



weaknesses for cable glands





rigid construction IK07

IP 55 IK 08 400 V ABS

**EP-LUX PLUS RN 1x5 IP 55 PE+N**

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
1/5	RN 1/5	Transp.	tak	1 pc. 3	kg/1 pc. 0,34	1951-01

Protection degree IP 55, rated voltage 400V
Terminal plate 1x10mm²
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 118x158x93 mm




IP 55 IK 08 400 V ABS

**EP-LUX PLUS RN 1x7 IP 55 (PE+N)**

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
1/7	RN 1/7	Transp.	tak	1 pc. 1	kg/1 pc. 0,53	1952-01

Protection degree IP 55, rated voltage 400V
Terminal blocks included
N 2x(3x10mm² + 2x16mm²)
PE 2x(3x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 157x173x96 mm





IP 55 IK 08 400 V ABS

**EP-LUX PLUS RN 1x9 IP 55 (PE+N)**

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
1/9	RN 1/9	Transp.	tak	1 pc. 1	kg/1 pc. 0,85	1953-01

Protection degree IP 55, rated voltage 400V
Terminal blocks included
N 1x(5x10mm²+2x16mm²)
PE 1x(5x10mm²+2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 197x197x55 mm




IP 65 IK 08 400 V ABS

**EP-LUX PLUS RN 1x6 IP 65 (PE+N)**

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
1/6	RN 1/6	Transp.	tak	1 pc. 1	kg/1 pc. 0,82	1960-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 2x(3x10mm² + 2x16mm²)
PE 2x(3x10mm² + 2x16mm²)
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 185x215x113 mm





IP 65 IK 08 400 V ABS

**EP-LUX PLUS RN 1x8 IP 65 (PE+N)**

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
1/9	RN 1/9	Transp.	tak	1 pc. 1	kg/1 pc. 1,1	1961-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 1x(5x10mm²+2x16mm²)
PE 1x(5x10mm²+2x16mm²)
Expandable to 9-mod in a row.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 239x214x113 mm




IP 65 IK 08 400 V ABS



EP-LUX PLUS RN 1x12 IP 65 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
1/12	RN 1/12	Transp.	tak	1 pc.	kg/1 pc.	1954-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 1x(3x10mm² + 6x16mm²)
PE 1x(3x10mm² + 6x16mm²)
Expandable to 13-mod in a row
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 303x214x118 mm




IP 65 IK 08 400 V ABS



EP-LUX PLUS RN 2x12 IP 65 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/12	RN 2/24	Transp.	tak	1 pc.	kg/1 pc.	1956-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 2x(3x10mm² + 6x16mm²)
PE 1x(3x10mm² + 6x16mm²)
Expandable to 13-mod in a row
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 304x408x149 mm




IP 65 IK 08 400 V ABS



EP-LUX PLUS RN 3x12 IP 65 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
3/12	RN 3/36	Transp.	tak	1 pc.	kg/1 pc.	1958-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 2x(3x10mm² + 6x16mm²)
PE 2x(3x10mm² + 6x16mm²)
Expandable to 13-mod in a row
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 303x642x118 mm



KEY LOCK EP-LUX PLUS

Type	Color	Pack.	Weight	Index
Zamek	-	1 pc.	kg/1 pc.	190410-00

Key lock with 2 keys.


IP 65 IK 08 400 V ABS



EP-LUX PLUS RN 1x18 IP 65 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
1/18	RN 1/18	Transp.	tak	1 pc.	kg/1 pc.	1955-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 1x(6x10mm² + 8x16mm²)
PE 1x(6x10mm² + 8x16mm²)
Expandable to 19-mod in a row
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 410x262x150 mm





IP 65 IK 08 400 V ABS



EP-LUX PLUS RN 2x18 IP 65 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
2/18	RN 2/36	Transp.	tak	1 pc.	kg/1 pc.	1962-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 2x(6x10mm² + 8x16mm²)
PE 1x(6x10mm² + 8x16mm²)
Expandable to 19-mod in a row
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 410x430x151 mm





IP 65 IK 08 400 V ABS



EP-LUX PLUS RN 3x18 (1x18+2x18) IP 65

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
3/18	RN 3/54	Transp.	tak	1 pc.	kg/1 pc.	1963-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 2x(6x10mm² + 8x16mm²)
PE 2x(6x10mm² + 8x16mm²)
2x terminal block 7-way 2x (LZ-7/N)
Expandable to 19-mod in a row
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 303x642x118 mm





IP 65 IK 08 400 V ABS



EP-LUX PLUS RN 3x18 IP 65 (PE+N)

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
3/18	RN 3/54	Transp.	tak	1 pc.	kg/1 pc.	1959-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 2x(6x10mm² + 8x16mm²)
PE 2x(6x10mm² + 8x16mm²)
Expandable to 19-mod in a row
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 410x786x150 mm





IP 65 IK 08 400 V ABS



EP-LUX PLUS RN 4x18 (2x2x36) IP 65

Rows / modules	Type	Door color	Term PE+N	Pack.	Weight	Index
4/18	RN 4/72	Transp.	tak	1 pc.	kg/1 pc.	1964-01

Protection degree IP 65, rated voltage 400V
Terminal blocks included
N 2x(6x10mm² + 8x16mm²)
PE 2x(6x10mm² + 8x16mm²)
3x terminal block 7-way 3x (LZ-7/N)
Expandable to 19-mod in a row
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 303x642x118 mm






GALANT PLUS IP 65

hermetic enclosures

Protection degree	IP 65
Impact resistance	IK 08
Tworzywo	>ABS<
Protection class	II
Color	RAL 7035(light gray)
Rated voltage	AC 440V/50Hz
Thermal condition	-25 °C +85 °C
Thermal test	80 °C
Norm	PN-EN 62208:2011, PN-EN 60670-24:2013



- degree protection IP 65
- protection class II
- 1 to 4 rows serie
- 12 and 18 mod. in rows
- enclosures 3 to 72 mod.

- advanced technology 2 components knockouts into serie 18 mod
- impact resistance IK08





cables enter by elastic round membranes into 2 components bushes

screw



terminal bars PE+N in standard

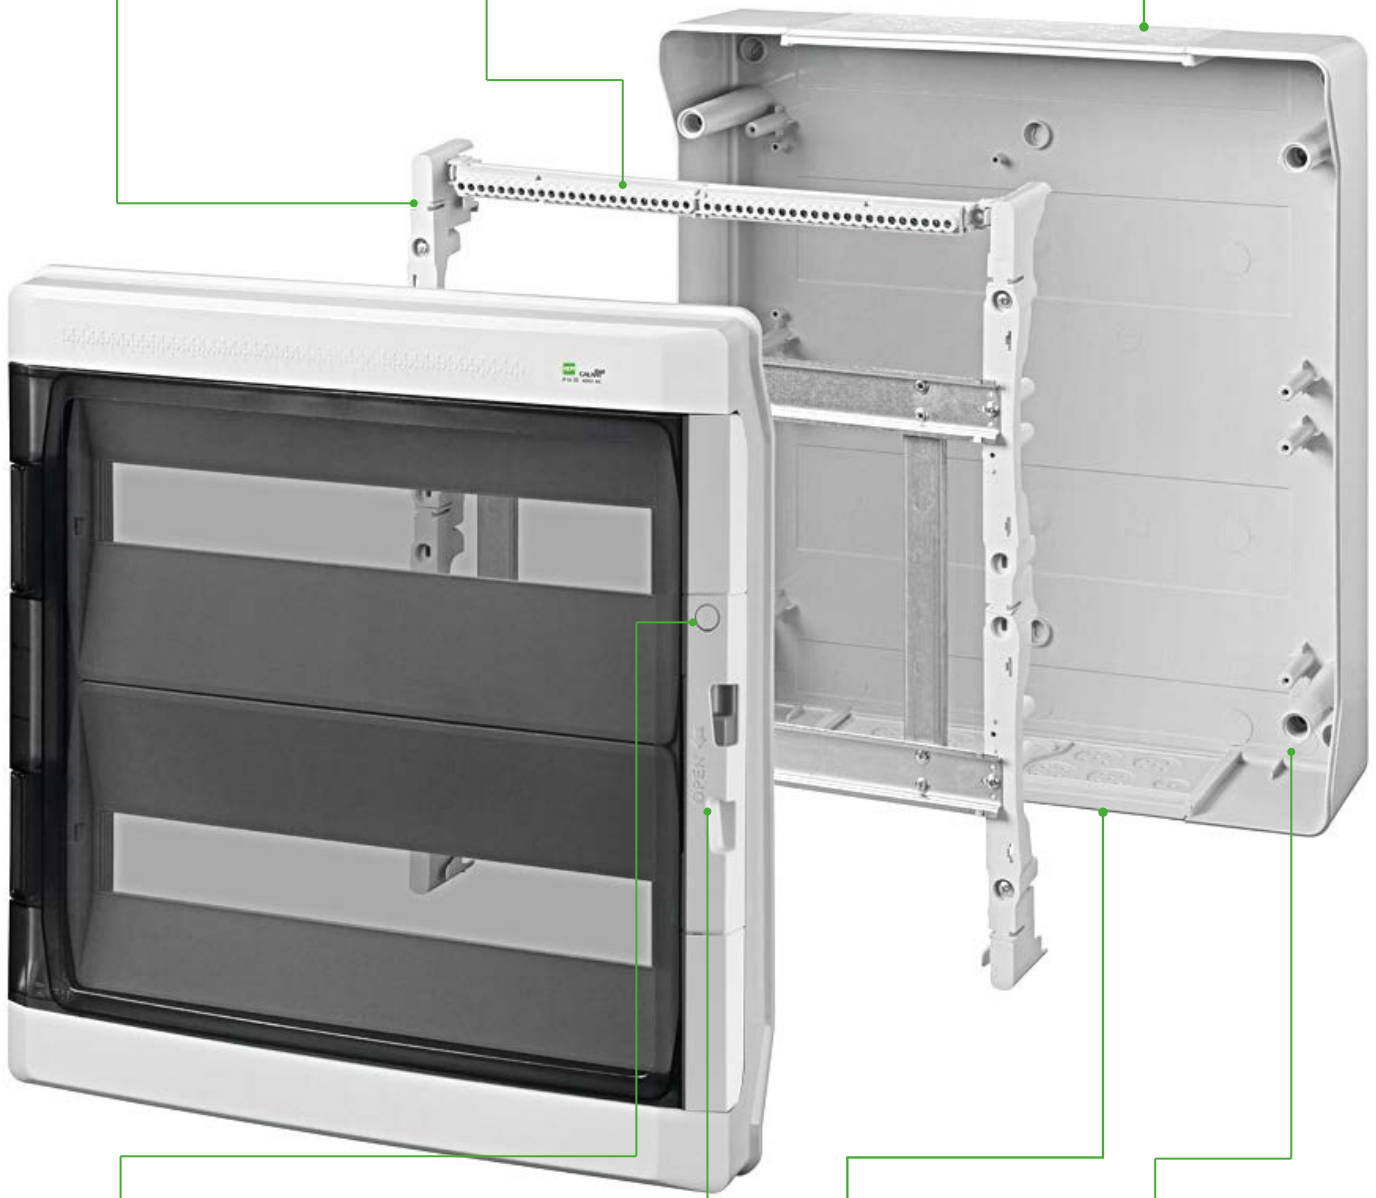

optional system door locking
Index: 0260-03



handle



sealing




screw cap

IP 65 UV IK 08 400 V ABS

**GALANT PLUS RN 1x3 IP 65**

Type	Door color	Pack.	Weight	Index
RN 1x3	Transp.	1 pc.	kg/1 pc.	
		1	0,4	1600-01

Protection degree IP 65, rated voltage 400V
Terminal bars PE+N in standard.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Sealable.
Dimensions: 100 x 175 x 105 mm




IP 65 UV IK 08 400 V ABS

**GALANT PLUS RN 1x4 IP 65**

Type	Door color	Pack.	Weight	Index
RN 1x4	Transp.	1 pc.	kg/1 pc.	
		1	0,64	1601-01

Protection degree IP 65, rated voltage 400V
Terminal bars PE+N in standard.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Sealable.
Dimensions: 147x217x117 mm




IP 65 UV IK 08 400 V ABS

**GALANT PLUS RN 1x8 IP 65**

Type	Door color	Pack.	Weight	Index
RN 1x8	Transp.	1 pc.	kg/1 pc.	
		1	0,85	1602-01

Protection degree IP 65, rated voltage 400V
Terminal bars PE+N in standard.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Sealable.
Dimensions: 235x217x117 mm




IP 65 UV IK 08 400 V ABS

**GALANT PLUS RN 1x12 IP 65**

Type	Door color	Pack.	Weight	Index
RN 1x12	Transp.	1 pc.	kg/1 pc.	
		1	10,6	1603-01

Protection degree IP 65, rated voltage 400V
Terminal bars PE+N in standard.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Sealable.
Dimensions: 307x217x117 mm




IP 65 UV IK 08 400 V ABS

**GALANT PLUS RN 2x12 IP 65**

Type	Door color	Pack.	Weight	Index
RN 2x12	Transp.	1 pc.	kg/1 pc.	
		1	2,14	1605-01

Protection degree IP 65, rated voltage 400V
Terminal bars PE+N in standard.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Sealable.
Dimensions: 305x410x160 mm




IP 65 UV IK 08 400 V ABS

**GALANT PLUS RN-3x12 IP 65**

Type	Door color	Pack.	Weight	Index
RN 3x12	Transp.	1 pc.	kg/1 pc.	
		1	2,75	1607-01

Protection degree IP 65, rated voltage 400V
Terminal bars PE+N in standard.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Sealable.
Dimensions: 323x563x160 mm




IP 65 UV IK 08 400 V ABS



GALANT PLUS RN 1x18 IP 65

Type	Door color	Pack.	Weight	Index
RN 1x18	Transp.	1 pc.	kg/1 pc.	
		1	2,54	1604-01

Protection degree IP 65, rated voltage 400V
 Plate culvert 2-component supplied.
 Terminal bars PE+N in standard.
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Dimensions: 432x290.5x160 mm




IP 65 UV IK 08 400 V ABS



GALANT PLUS RN 2x18 IP 65

Type	Door color	Pack.	Weight	Index
RN 2/18	Transp.	1 pc.	kg/1 pc.	
		1	3,96	1606-01

Protection degree IP 65, rated voltage 400V
 Plate culvert 2-component supplied.
 Terminal bars PE+N in standard.
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Dimensions: 432x464x160 mm




IP 65 UV IK 08 400 V ABS



GALANT PLUS RN 3x18 IP 65

Type	Door color	Pack.	Weight	Index
RN 3x18	Transp.	1 pc.	kg/1 pc.	
		1	5,72	1608-01

Protection degree IP 65, rated voltage 400V
 Plate culvert 2-component supplied.
 Terminal bars PE+N in standard.
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Dimensions: 432x638x160 mm





IP 65 UV IK 08 400 V ABS



GALANT PLUS RN 4x18 IP 65

Type	Door color	Pack.	Weight	Index
RN 4x18	Transp.	1 pc.	kg/1 pc.	
		1	7,69	1609-01

Protection degree IP 65, rated voltage 400V
 Plate culvert 2-component supplied.
 Terminal bars PE+N in standard.
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Dimensions: 432x878x160 mm



KEY LOCK GALANT PLUS

Type	Color	Pack.	Weight	Index
Key lock	-	1 pc.	kg/1 pc.	
		1	0,03	0260-03

Key lock with 2 keys.



4x18-mod.
1609-01




HERMETICA™ IP65

hermetic enclosures

HERMETIC ENCLOSURES HERMETICA IP65

Protection degree	IP 65
Material	CASING:ABS/Door:PC
Impact resistance	IK 08
Protection class	II
Color	RAL 7035(light gray)
Rated voltage	AC 440V/50Hz
Thermal condition	-20°C+70°C
Thermal test	70°C
Norma	PN-EN 62208:2011, PN-EN 60670-24:2013



- Max MCB's height till 52 mm
- included DIN rail
- 3 and 4 mod casing one of the smallest at market
- walls with knockout holes PG
- possibility sealing window and enclosure

- impact resistance
- window regulation position stages: open and half open
- individual equipment configuration into bigger enclosures
- solid construction (thicker walls)

HERMETIC ENCLOSURES HERMETICA IP65



Door in transp. colour sealable




Machine sealing under door and upper cover



Large space for cabling

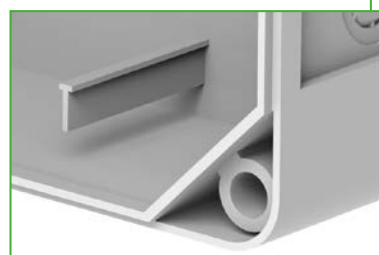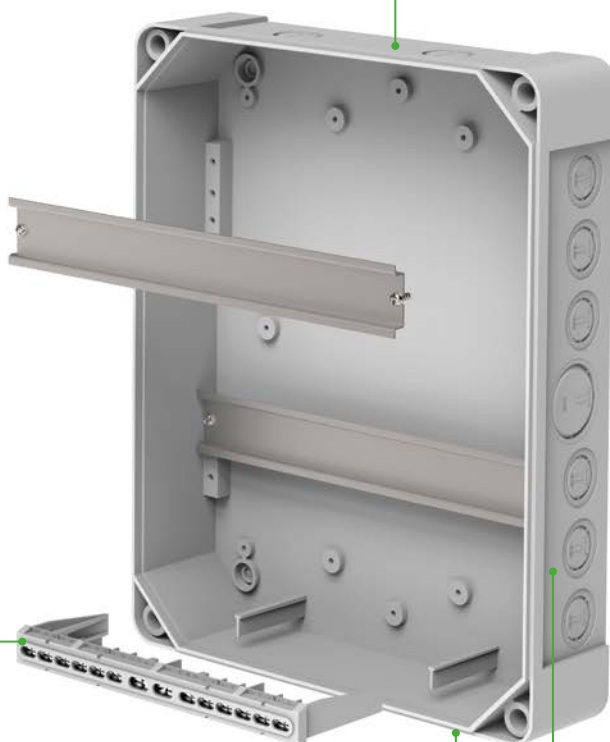

rigid construction IK08

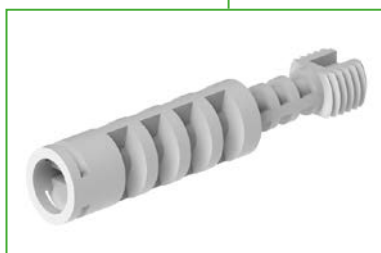

screw with sealing



optional terminal bars PE+N




weaknesses for cable glands

IP 65 UV IK 08 400 V ABS PC

**HERMETICA RN 1x3 IP65**

Type	Door color	Pack.	Weight	Index
RN-1x3	Grey RAL 7035	1 pc.	kg/1 pc.	2201-01

Dimensions: 135x74x97 mm
N terminal included.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

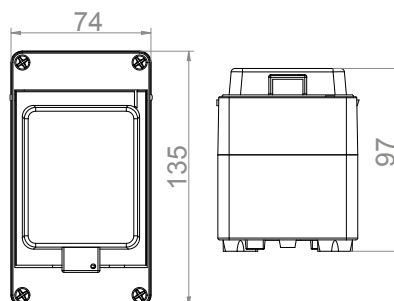


IP 65 UV IK 08 400 V ABS PC

**HERMETICA RN 1x4 IP65**

Type	Door color	Pack.	Weight	Index
RN-1x4	Grey RAL 7035	1 pc.	kg/1 pc.	2202-01

Dimensions: 170x105x111 mm
N terminal included.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

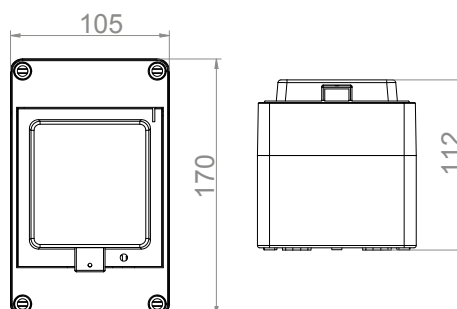


IP 65 UV IK 08 400 V ABS PC

**HERMETICA RN 1x6 IP65**

Type	Door color	Pack.	Weight	Index
RN-1x6	Grey RAL 7035	1 pc.	kg/1 pc.	2203-01

Dimensions: 170x135x112 mm
N terminal included.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

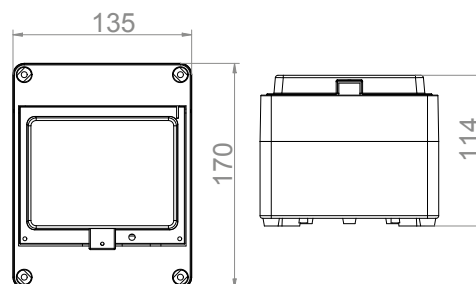

IP 65 UV IK 08 400 V ABS PC

**HERMETICA RN 1x8+2 IP65**

Type	Door color	Pack.	Weight	Index
RN-1x8+2	Grey RAL 7035	1 pc.	kg/1 pc.	
		1	0,757	2204-01


Dimensions: 168x220x112.5 mm

Terminal blocks included

N 2x(1-10)mm² + 3x(1-16)mm²

PE 2x(1-10)mm² + 3x(1-16)mm²

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

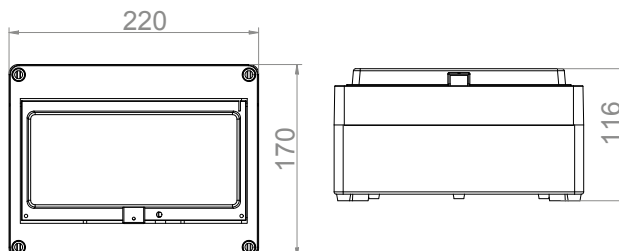

IP 65 UV IK 08 400 V ABS PC

**HERMETICA RN 1x12+1 IP65**

Type	Door color	Pack.	Weight	Index
RN-1x12+1	Grey RAL 7035	1 pc.	kg/1 pc.	
		1	1,090	2207-01


Dimensions: 220x270x120 mm

Terminal blocks included

N 5x(1-10)mm² + 2x(1-16)mm²

PE 5x(1-10)mm² + 2x(1-16)mm²

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

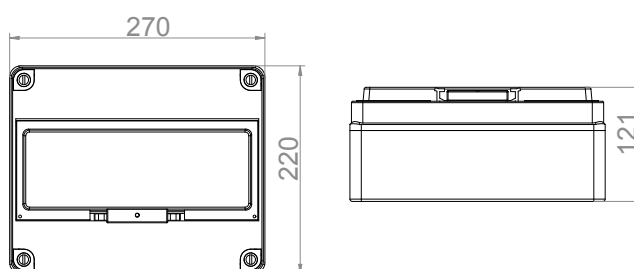

IP 65 UV IK 08 400 V ABS PC

**HERMETICA RN 1x12+4 IP65**

Type	Door color	Pack.	Weight	Index
RN-1x12+4	Grey RAL 7035	1 pc.	kg/1 pc.	
		1	1,658	2208-01


Dimensions: 270x340x138 mm

Terminal blocks included

N 12x(1-10)mm² + 2x(1-16)mm²

PE 12x(1-10)mm² + 2x(1-16)mm²

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

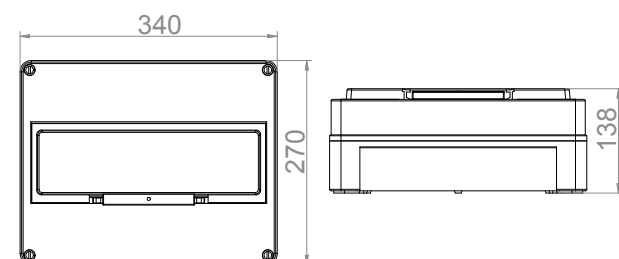


IP 65 UV IK 08 400 V ABS PC

**HERMETICA RN 2x12+2 IP65**

Type	Door color	Pack.	Weight	Index
RN-2x12+2	Grey RAL 7035	1 pc.	kg/1 pc.	
		1	1,628	2209-01

Dimensions: 340x270x119,5 mm
 Terminal blocks included
 N 12x(1-10)mm² + 2x(1-16)mm²
 PE 12x(1-10)mm² + 2x(1-16)mm²
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

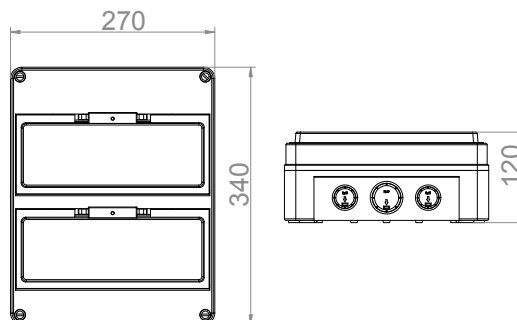


IP 65 UV IK 08 400 V ABS PC

**HERMETICA RN 1x10 IP65**

Type	Door color	Pack.	Weight	Index
RN-1x10	Grey RAL 7035	1 pc.	kg/1 pc.	
		1	0,953	2205-01

Dimensions: 270x220x120 mm
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

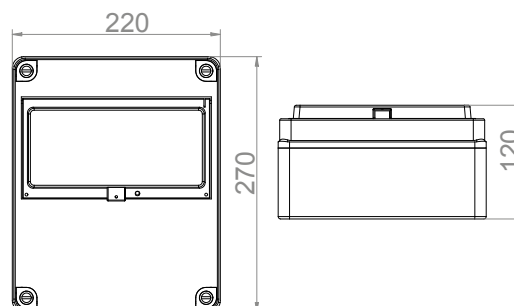


IP 65 UV IK 08 400 V ABS PC

**HERMETICA RN 1x13 IP65**

Type	Door color	Pack.	Weight	Index
RN-1x13	Grey RAL 7035	1 pc.	kg/1 pc.	
		1	1,322	2206-01

Dimensions: 340x270x119,5 mm
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013

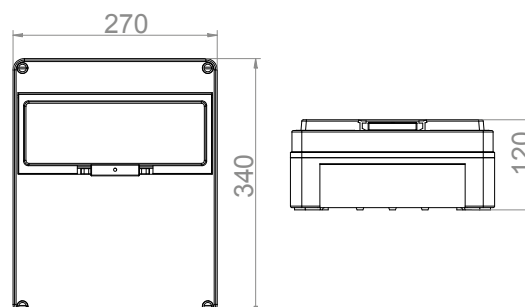

PHOTOVOLTAIC ENCLOSURES HERMETICA PV IP65

IP 65 UV IK 07 400 V ABS PC



ENCLOSURES HERMETICA PV 1/8 DC 1000V TYPE 2 1XMPPT

Type	Door color	Pack.	Weight	Index
PV 1x8 TYPE 2	Grey RAL 7035	1 pc.	kg/1 pc.	
		1	1,6	2214-01

1 x string (łańcuch) PV, 1x MPPT

Enclosure parameters

- number of modules: 1x8+2
- protection rating: IP65
- protection rating (IK code) IK 07
- rated insulation voltage e: Uni: 690 V AC / 1000 V DC
- declaration of conformity of the enclosure with standard PN-EN 62208:2011
- protection class II
- working temperature range: from -20 to +70°C
- N+PE terminals
- stationary wall mounting

Fuse holder

- EATON CHPV1U 2pc.
- gPV characteristics 10x38 cylindrical inserts
- Nominal voltage 1000 V DC
- fuse links are individually matched to the installation

SPD protector parameters

- EATON SPPVT2 TYPE 2 1 pc.
- Maximum discharge current (8/20) 40 kA
- Protection level 3.7 kV
- Rated discharge current - peak (8/20) 15 kA

Connectors

- MC4 Multi-Contact 1000DC 30A 1pl.
- PE Gland PG16 16mm² 1 pc.

IP 65 UV IK 07 400 V ABS PC



ENCLOSURES HERMETICA PV 1/8 DC 1000V TYPE 1+2 1XMPPT

Type	Door color	Pack.	Weight	Index
PV 1x8 TYPE 1+2	Grey RAL 7035	1 pc.	kg/1 pc.	
		1	1,6	2224-01

1 x string PV, 1x MPPT

Enclosure parameters

- number of modules: 1x8+2
- protection rating: IP65
- protection rating (IK code) IK 07
- Rated insulation voltage e: Uni: 690 V AC / 1000 V DC
- declaration of conformity of the enclosure with standard PN-EN 62208:2011
- protection class II
- working temperature range: from -20 to +70°C
- N+PE terminals
- stationary wall mounting

Fuse holder

- EATON CHPV1U 2 pc.
- gPV characteristics 10x38 cylindrical inserts
- Nominal voltage 1000 V DC
- fuse links are individually matched to the installation

Parameters of the SPD protector

- EATON SPPVT12 AX TYPE 1+2 1 pc.
- Maximum discharge current (8/20) 40 kA
- Protection level 3.7 kV
- Rated discharge current - peak (8/20) 15 kA

Connectors

- MC4 Multi-Contact 1000DC 30A 1pl.
- PE Gland PG16 16mm² 1 pc.

IP 65 UV IK 07 400 V ABS PC



ENCLOSURES HERMETICA PV 1/12 DC 1000V TYPE 2 2XMPPT

Type	Door color	Pack.	Weight	Index
PV 1x12 TYPE 2	Grey RAL 7035	1 pc.	kg/1 pc.	
PV 1x12 TYPE 2	Grey RAL 7035	1	2,4	2217-01
				2217-21

2 x string PV, 2x MPPT

Enclosure parameters

- number of modules: 1x12+1
- degree of protection: IP65
- protection rating (IK code) IK 07
- Rated insulation voltage e: Uni: 690 V AC / 1000 V DC
- declaration of conformity of the enclosure with standard PN-EN 62208:2011
- protection class II
- working temperature range: from -20 to +70°C
- N+PE terminals
- stationary wall mounting

Fuse-holder (2227-21 WITHOUT BASE)

- EATON CHPV1U 4 pc.
- gPV characteristics 10x38 cylindrical inserts
- Nominal voltage 1000 V DC
- fuse links are individually matched to the installation

Parameters of the SPD protector

- EATON SPPVT2 TYPE 2 2 pc.
- Maximum discharge current (8/20) 40 kA
- Protection level 3.7 kV
- Rated discharge current - peak (8/20) 15 kA

Connectors

- MC4 Multi-Contact 1000DC 30A 2 pcs.
- PE Gland PG16 16mm² 1 pc.

PHOTOVOLTAIC ENCLOSURES HERMETICA PV IP65

IP 65 UV IK 07 400 V ABS PC



ENCLOSURES HERMETICA PV 1/12 DC 1000V TYPE 1+2 2XMPPT

Type	Door color	Pack.	Weight	Index
PV 1x12 TYPE 1+2	Grey RAL 7035	1 pc.	kg/1 pc.	
PV 1x12 TYPE 1+2	Grey RAL 7035	1	2,4	2227-01
PV 1x12 TYPE 1+2	Grey RAL 7035	1	2,4	2227-21

2x string PV, 2x MPPT

Enclosure parameters

- number of modules: 1x12+1
- degree of protection: IP65
- degree of protection (IK code) IK 07
- Rated insulation voltage e: Uni: 690 V AC / 1000 V DC
- declaration of conformity of the enclosure with standard PN-EN 62208:2011
- protection class II
- working temperature range: from -20 to +70°C
- N+PE terminals
- stationary wall mounting

Fuse-holder (2227-21 WITHOUT BASE)

- EATON CHPV1U 4 pc.
- gPV characteristics 10x38 cylindrical inserts
- Nominal voltage 1000 V DC
- fuse links are individually matched to the installation

Parameters of SPD protector

- EATON SPPVT12 AX TYPE 1+2 2 pc.
- Maximum discharge current (8/20) 40 kA
- Protection level 3.7 kV
- Rated discharge current - peak (8/20) 15 kA

Connectors

- MC4 Multi-Contact 1000DC 30A 2 pcs.
- PE Gland PG16 16mm² 1 pc.

IP 65 UV IK 07 400 V ABS PC



ENCLOSURES HERMETICA PV 2X12 DC 1000V 4WEJX2MPPT

Type	Door color	Pack.	Weight	Index
PV 2x12 TYPE 2	Grey RAL 7035	1 pc.	kg/1 pc.	
PV 2x12 TYPE 1+2	Grey RAL 7035	1	2,4	2219-01
PV 2x12 TYPE 1+2	Grey RAL 7035	1	2,4	2229-21

4x string PV, 2x MPPT

Enclosure parameters

- number of modules: 2x12
- protection rating: IP65
- protection rating (IK code) IK 07
- Rated insulation voltage e: Uni: 690 V AC / 1000 V DC
- declaration of conformity of the enclosure with standard PN-EN 62208:2011
- protection class II
- working temperature range: from -20 to +70°C
- N+PE terminals
- stationary wall mounting

Fuse holder

- EATON CHPV1U 8 pcs
- gPV characteristics of 10x38 cylindrical insert
- Nominal voltage 1000 V DC
- Nominal current of the cylindrical fuse link is adjusted individually for the installation

SPD protector parameters

- EATON SPPVT12-10-2 TYPE 2 /EATON SPPVT12-10-2 AX TYPE 1-2 2 pc.
- Maximum discharge current (8/20) 40 kA
- Protection level 3.7 kV
- Rated Discharge Current - peak (8/20) 15 kA

Connectors

- MC4 Multi-Contact 1000DC 30A 4pl. IN 2pl. OUTPUT
- PE Gland PG16 16mm² 1 pc.

IP 65 UV IK 07 400 V ABS PC



ENCLOSURES HERMETICA PV 1X12 AC 16A TYPE 2

Type	Door color	Pack.	Weight	Index
PV 1x12 TYPE 2	Grey RAL 7035	1 pc.	kg/1 pc.	
PV 1x12 TYPE 1+2	Grey RAL 7035	1	2,4	2237-01
PV 1x12 TYPE 1+2	Grey RAL 7035	1	2,4	2247-01

Switchgear equipped with AC protections.

Enclosure parameters

- number of modules: 1x12+1
- protection rating: IP65
- protection rating (IK code) IK 07
- Rated insulation voltage e: Uni: 690 V AC / 1000 V DC
- declaration of conformity of the enclosure with standard PN-EN 62208:2011
- protection class II
- working temperature range: from -20 to +70°C
- N+PE terminals
- stationary wall mounting

Parameters of the SPD protector

- EATON SPCT2-280/4 TYPE 2/EATON SPBT12-280/4 TYPE 1+2 1 pc.
- TN-S system
- Rated discharge current - peak (8/20) 20 kA
- Maximum discharge current (8/20) 40 kA
- Number of poles 4
- Protection level 4 kV
- Overcurrent circuit breaker
- EATON HN-C16/3 1pc.
- Short-circuit breaking capacity 6kA
- Tripping distribution C
- Rated current 16A
- Number of poles 3

Connectors

- PE gland PG16 connection 2 pc.
- PE gland PG13.5 under PE 16mm² 1 pc.



RS
power enclosure

Protection degree	IP 65*
	*depends on assembled sockets degree protection is changing
Material	ABS
Impact resistance	IK 08
Thermal condition	-20°C +70°C
Thermal test	70°C
Norma	PN-EN 62208:2011, PN-EN 60670-24:2013



- Degree protection casing IP 65*
depends on assembled sockets degree protection is changin
- impact resistance IK08
- thermal condition -20°C +70°C
- thermal test 70°C



Terminal block PE+N



weakness



Metal key option
0260-03



Universal cover to soc-
kets assembly IP44/IP67



fig.1



fig.2

Depending on the
type of sockets, you can
mount them to
covers (Fig.1) or
directly to
housing (fig.2)



screw cap



reversible hinges

Customized configuration for individual orders

POWER ENCLOSURES RS


IP 44 UV IK 08 400 V ABS



RS 9-MOD 2X2P+Z, 3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index
RS-9	9 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6231-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 9 mod.
Dimensions: 220x260x175 mm




IP 44 UV IK 08 400 V ABS



RS 9-MOD 2X2P+Z, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-9	9 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6232-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 9 mod.
Dimensions: 220x260x175 mm




IP 44 UV IK 08 400 V ABS



RS 9-MOD 2X2P+Z, 2X3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index
RS-9	9 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6221-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 9 mod.
Dimensions: 220x345x175 mm




IP 44 UV IK 08 400 V ABS



RS 9-MOD 2X2P+Z, 2X3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-9	9 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6222-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 9 mod.
Dimensions: 220x345x175 mm




IP 44 UV IK 08 400 V ABS



RS 9-MOD 2X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-9	9 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6223-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 9 mod.
Dimensions: 220x345x175 mm



POWER ENCLOSURES RS


IP 44 UV IK 08 400 V ABS



RS 8-MOD 2X2P+Z, 2X3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index
RS-8	8 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	

Protection degree IP 44, rated voltage 400V
 N 1x(5x10mm²+2x16mm²)
 PE 1x(5x10mm²+2x16mm²)
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection – 8 mod.
 Dimensions: 230x506x175 mm




IP 44 UV IK 08 400 V ABS



RS 8-MOD 2X2P+Z, 2X3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-8	8 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	

Protection degree IP 44, rated voltage 400V
 N 1x(5x10mm²+2x16mm²)
 PE 1x(5x10mm²+2x16mm²)
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection – 8 mod.
 Dimensions: 230x506x175 mm




IP 44 UV IK 08 400 V ABS



RS 8-MOD. 2X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-8	8 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	

Protection degree IP 44, rated voltage 400V
 N 1x(5x10mm²+2x16mm²)
 PE 1x(5x10mm²+2x16mm²)
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection – 8 mod.
 Dimensions: 230x506x175 mm




IP 44 UV IK 08 400 V ABS



RS 8-MOD 2P+Z, 2X3P+N+Z 16A, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-8	8 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	

Protection degree IP 44, rated voltage 400V
 N 1x(5x10mm²+2x16mm²)
 PE 1x(5x10mm²+2x16mm²)
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection – 8 mod.
 Dimensions: 230x506x175 mm




IP 44 UV IK 08 400 V ABS



RS 6-MOD 2X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A

Type	Color	Pack.	Weight	Index
RS-6	Grey RAL 7035	1 pc.	kg/100 pc.	

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection: 6 mod.
 Dimensions: 495x125x107 mm




IP 44 UV IK 08 400 V ABS



RS 6-MOD 2X2P+Z, 3P+N+Z 16A

Type	Color	Pack.	Weight	Index
RS-6	Grey RAL 7035	1 pc.	kg/100 pc.	

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection: 6 mod.
 Dimensions: 495x125x107 mm



POWER ENCLOSURES RS


IP 44 UV IK 08 400 V ABS



RS 13-MOD 2X2P+Z, 2X3P+N+Z 16A, 2X3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-13	13 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6251-00

Protection degree IP 44, rated voltage 400V
 N 1x(7x10mm²+2x16mm²)
 PE 1x(7x10mm²+2x16mm²)
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection – 13 mod.
 Dimensions: 330x506x175 mm




IP 44 UV IK 08 400 V ABS



POWER ENCLOSURE FOR METER BOARD :BUILDING TYPE 2X2P+Z, 3P+N+2 16A,3P+N+2 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-13	13 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6258-00

Protection degree IP 44, rated voltage 400V
 N 1x(7x10mm²+2x16mm²)
 PE 1x(7x10mm²+2x16mm²)
 Norm: PN-EN 61439-3:2012
 Protections: FI40/4/0,03, C20/3, 2xB20
 Inspection window.
 Dimensions: 330x506x175 mm




IP 44 UV IK 08 400 V ABS



RS-2/32 MOD 2X2P+Z, 3P+N+Z 16A, 2X3P+N+Z+32A

Type	Color	Pack.	Weight	Index
RS-2/32-mod.	Grey RAL 7035	1 pc.	kg/100 pc.	6256-00

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection: 32 mod.
 Dimensions: 685x330x150 mm
 Ability to use a key lock: 0260-03.




IP 44 UV IK 08 400 V ABS



RS-2/32 MOD 4X2P+Z, 2X3P+N+Z 16A, 3P+N+Z 32A

Type	Color	Pack.	Weight	Index
RS-2/32-mod.	Grey RAL 7035	1 pc.	kg/100 pc.	6257-00

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection: 32 mod.
 Dimensions: 685x330x150 mm
 Ability to use a key lock: 0260-03.



IP 44 UV IK 08 400 V ABS STEEL



RS-B 13-MOD 3X2P+Z, 2X3P+N+Z 16A, 3P+N+Z 32A WITH CABLE AND PLUG 32A 5P

Type	Space for protection	Color	Pack.	Weight	Index
RS-B 13 mod	13 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6259-10

Protection degree IP 44, rated voltage 400V
 NORM: EN 61439-1, EN 60439-3, EN 62208
 Space for protection: 13 mod.,
 protections included: C40/4/0,03 C25/3 3xC16
 Cable: OnPD 5x6mm² – 5 m + plug 3P+N+Z 32A
 Dimensions: 370x820x480 mm
 Ability to use a key lock: 0260-03.

POWER ENCLOSURES RS


IP 44 UV IK 08 400 V ABS



RSO-13 MOD 2X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A

Type	Color	Pack.	Weigh	Index new
RS-13	Grey RAL 7035	1 pc.	kg/100 pc.	
		1	1,8	6210-00

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection: 12 mod.. Old equivalent 6250-00
 Dimensions: 260x360x130 mm
 Door sealing capability.




IP 44 UV IK 08 400 V ABS



RS-13 MOD 4X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A

Type	Color	Pack.	Weigh	Index new
RS-13	Grey RAL 7035	1 pc.	kg/100 pc.	
		1	1,87	6210-01

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection: 12 mod.. Old equivalent 6250-01
 Dimensions: 260x360x130 mm
 Door sealing capability.




IP 44 UV IK 08 400 V ABS



RS-2 2P+Z, 3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index old	Index new
RS-2	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.		
			1	0,6	6261-00	6202-00

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Old equivalent 6261-00
 No security
 Dimensions: 165x125x105 mm




IP 44 UV IK 08 400 V ABS



RS-2 2P+Z, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index old	Index new
RS-2	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.		
			1	0,6	6262-00	6202-01

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Old equivalent 6262-00
 No security
 Dimensions: 165x125x105 mm




IP 44 UV IK 08 400 V ABS



RS-3 2X2P+Z, 3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index new
RS-2	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	
			1	0,7	6203-00

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Old equivalent 6263-00
 No security
 Dimensions: 175x150x135 mm




IP 44 UV IK 08 400 V ABS



RS-3 2X2P+Z, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index new
RS-2	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	
			1	0,7	6203-01

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Old equivalent 6264-00
 No security
 Dimensions: 175x150x135 mm




IP 54 UV IK 08 400 V ABS



RS 10 MOD. 2X2P+Z, 3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index
RS-10	10 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6224-00

Protection degree IP 54, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 10 mod.
Dimensions: 270 x 220 x 120 mm




IP 54 UV IK 08 400 V ABS



RS 10 MOD. 2X2P+Z, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-10	10 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6225-00

Protection degree IP 54, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 10 mod.
Dimensions: 270 x 220 x 120 mm




IP 54 UV IK 08 400 V ABS



RS 10 MOD. 2X2P+Z, 2X3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index
RS-10	10 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6226-00

Protection degree IP 54, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 10 mod.
Dimensions: 270 x 220 x 120 mm




IP 54 UV IK 08 400 V ABS



RS 10 MOD. 2X2P+Z, 2X3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-10	10 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6227-00

Protection degree IP 54, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 10 mod.
Dimensions: 270 x 220 x 120 mm




IP 54 UV IK 08 400 V ABS



RS 10 MOD. 2X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-10	10 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6228-00

Protection degree IP 54, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 10 mod.
Dimensions: 270 x 220 x 120 mm



POWER ENCLOSURES RS


IP 44 UV IK 08 400 V ABS



RS-P 4X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-P	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6214-00

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 No security
 IN: OnPD 5x16 mm² – 2 m + wtyka 3P+N+Z 16A
 Dimensions: 215x355x85 mm




IP 44 UV IK 08 400 V ABS



RS-P 4X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A WITH CABLE AND PLUG 32A 5P

Type	Space for protection	Color	Pack.	Weight	Index
RS-P	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6214-10

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 No security
 Dimensions: 215x355x85 mm
 IN: gland PG21




IP 44 UV IK 08 400 V ABS



RS-P 2X2P+Z, 2X3P+N+Z 16A, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-P	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6215-00

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 No security
 Dimensions: 215x355x85 mm
 IN: gland PG21




IP 44 UV IK 08 400 V ABS



RS-P 4-MOD 2X2P+Z, 2X3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index
RS-P	4 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6211-00

Protection degree IP 44, rated voltage 400V
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 Space for protection – 4 mod.
 Dimensions: 215x355x85 mm
 IN: gland PG21




IP 44 UV IK 08 400 V ABS



RS-P 4-MOD 2X2P+Z, 2X3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-P-4	4 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6212-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 4 mod.
Dimensions: 215x355x85 mm
IN:gland PG21




IP 44 UV IK 08 400 V ABS



RS-P 4-MOD 2X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-P-4	4 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6213-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 4 mod.
Dimensions: 215x355x85 mm
IN:gland PG21




IP 44 UV IK 08 400 V ABS



RS-P 4-MOD 2X2P+Z, 3P+N+Z 16A, 3P+N+Z 32A WITH CABLE AND PLUG 32A 5P

Type	Space for protection	Color	Pack.	Weight	Index
RS-P-4	nie dotyczy	Grey RAL 7035	1 pc.	kg/1 pc.	6213-10

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Security: C16/3 + C16
Cable OnPD 5x16 mm² – 2 m + wtyka 3P+N+Z 32A
Dimensions: 215x355x85 mm




IP 44 UV IK 08 400 V ABS



RS 8-MOD. 2X 2P+Z 16A 250V, 3P+N+Z 16A 400V

Type	Space for protection	Color	Pack.	Weight	Index
RS-P-8	8 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6216-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 8 mod.
Dimensions: 215x355x85 mm
IN:gland PG21




IP 44 UV IK 08 400 V ABS



RS 8-MOD 2X 2P+Z 16A 250V, 3P+N+Z 32A 400V

Type	Space for protection	Color	Pack.	Weight	Index
RS-P-8	8 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6216-10

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 8 mod.
Dimensions: 215x355x85 mm
IN:gland PG21




IP 44 UV IK 08 400 V ABS



RS 8-MOD 3P+N+Z 16A 400V, 3P+N+Z 32A 400V

Type	Space for protection	Color	Pack.	Weight	Index
RS-P-8	8 mod.	Grey RAL 7035	1 pc.	kg/1 pc.	6216-20

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Space for protection – 8 mod.
Dimensions: 215x355x85 mm
IN:gland PG21



ZESTAWY SIŁOWE RS-Z


IP 44 UV IK 08 400 V ABS



RS-Z SWITCH 0-1, 3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6271-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam 0-1, 16A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH 0-1, 3P+N+Z 16A, 2P+Z 230V

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6272-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam 0-1, 16A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH 0-1, 3P+N+Z 16A, 2X2P+Z 230V

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6273-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam 0-1, 16A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH 0-1, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6274-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam 0-1, 32A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH 0-1, 3P+N+Z 32A, 2P+Z 230V

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6275-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam 0-1, 32A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH 0-1, 3P+N+Z 32A, 2X2P+Z 230V

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6276-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam 0-1, 32A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH L-0-P, 3P+N+Z 16A

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6271-20

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam L-0-P, 16A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH L-0-P, 3P+N+Z 16A, 2P+Z 230V

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6272-20

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam L-0-P, 16A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH L-0-P, 3P+N+Z 16A, 2X2P+Z 230V

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6273-20

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam L-0-P, 16A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH L-0-P, 3P+N+Z 32A

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6274-20

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam L-0-P, 32A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH L-0-P, 3P+N+Z 32A, 2P+Z 230V

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6275-20

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam L-0-P, 32A
Dimensions: 120x195x105 mm




IP 44 UV IK 08 400 V ABS



RS-Z SWITCH L-0-P, 3P+N+Z 32A, 2X2P+Z 230V

Type	Space for protection	Color	Pack.	Weight	Index
RS-Z	Not applicable	Grey RAL 7035	1 pc.	kg/1 pc.	6276-20

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Switch cam L-0-P, 32A
Dimensions: 120x195x105 mm



POWER ENCLOSURES RS-W

IP 44 IK 08 400 V ABS



RS-W 3X2P+Z, 3P+N+Z 16A, Z WIESZAKIEM

Type	Color	Pack.	Weigh	Index
RS-W	Grey RAL 7035	1 pc.	kg/100 pc.	
		1	0,4	6200-00

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
3x250V blue socket, power socket 16A on bottom.
Dimensions: 104x104x193 mm



16A 5P

IP 44 IK 08 400 V ABS



RS-W 4X2P+Z, 3P+N+Z 16A

Type	Color	Pack.	Weigh	Index
RS-W	Grey RAL 7035	1 pc.	kg/100 pc.	
		1	0,4	6200-01

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
4x250V blue socket, power socket 5P/16A on bottom.
Dimensions: 104x104x193 mm



16A 5P

IP 44 IK 08 400 V ABS



RS-W 3X2P+Z, 3P+N+Z 5P/32A Z WIESZAKIEM

Type	Color	Pack.	Weigh	Index
RS-W	Grey RAL 7035	1 pc.	kg/100 pc.	
		1	0,4	6200-02

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
3x250V blue socket, power socket 5P/32A on bottom.
Dimensions: 104x104x193 mm



32A 5P

IP 44 IK 08 400 V ABS



RS-W 4X2P+Z, 3P+N+Z 32A

Type	Color	Pack.	Weigh	Index
RS-W	Grey RAL 7035	1 pc.	kg/100 pc.	
		1	0,4	6200-03

Protection degree IP 44, rated voltage 400V
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
4x250V blue socket, power socket 32A/5P on bottom.
Dimensions: 104x104x193 mm



32A 5P


IP 44 UV IK 10



RS-P RUBBER 6X2P+Z WITH CABLE AND PLUG 16A 250 V

Type	Color	Pack.	Weight	Index
Extension power cord	Black RAL 9005	1 pc.	kg/1 pc.	
		1	1,47	7000-10

6x2P+Z with cable OnPd 3x2,5 mm² - 2 m with plug 16A 250V
Dimensions: 115x430x70 mm




IP 44 UV IK 10



RS-P RUBBER 6X2P+Z WITH CABLE AND PLUG 5P/16A

Type	Color	Pack.	Weight	Index
Extension power cord	Black RAL 9005	1 pc.	kg/1 pc.	
		1	1,48	7001-10

6x2P+Z with cable OnPd 5x2,5 mm² - 2 m with plug 16A 5P
Dimensions: 115x430x70 mm




IP 44 UV IK 10



RS-P RUBBER 4X2P+Z, 3P+N+Z 32A WITH CABLE AND PLUG 5P/32A

Type	Color	Pack.	Weight	Index
Extension power cord	Black RAL 9005	1 pc.	kg/1 pc.	
		1	1,48	7002-10

4x2P+Z, 3P+N+Z 32A with cable OnPd 5x2,5 mm² - 2 m with plug 5P/32 A
Dimensions: 115x430x70 mm




IP 44 UV IK 10



RS-P RUBBER 3X2P+Z Z ZABEZPIECZENIEM C4/40/0,03 A I WTYKĄ 16A 5P

Type	Color	Pack.	Weight	Index
Extension power cord	Black RAL 9005	1 pc.	kg/1 pc.	
		1	1,48	7010-10

3x2P+Z with cable OnPd 5x2,5 mm² with plug 5P
Security space: 4-mod.
Equipped with security: C4/40/0,03 A
Dimensions: 115x430x70 mm




IP 44 UV IK 10



RS-P RUBBER 4X2P+Z Z ZABEZPIECZENIEM C2/25/0,03 A WITH CABLE AND PLUG 16A 250V

Type	Color	Pack.	Weight	Index
Extension power cord	Black RAL 9005	1 pc.	kg/1 pc.	
		1	1,49	7011-10

4x2P+Z, 2x3P+N+Z 16A with cable OnPd 3x2,5 mm² with plug 16A
Security space: 4-mod.
Equipped with security: C2/25/0,03 A
Dimensions: 115x430x70 mm




IP 44 UV IK 10



RS-P RUBBER 2X2P+Z, 2X3P+N+Z 32A WITH SECURITY C4/40/0,03 A WITH CABLE AND PLUG 5P 32A

Type	Color	Pack.	Weight	Index
Extension power cord	Black RAL 9005	1 pc.	kg/1 pc.	
		1	1,5	7012-10

2x2P+Z, 2x3P+N+Z 32A with cable OnPd 5x2,5 mm² with plug 32A
Security space: 4-mod.
Equipped with security: C4/40/0,03 A
Dimensions: 115x430x70 mm



POWER PLUGS AND POWER SOCKETS

IP 44 **400 V**



POWER PLUG16A

Type	Color	Pack.	Weight	Index
16A / 4P	Red RAL 3020	1 pc.	kg/1 pc.	
16A / 5P	Red RAL 3020	10	0,13	X100034
		10	0,15	X100058

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

IP 44 **400 V**



POWER PLUG32A

Type	Color	Pack.	Weight	Index
32A / 4P	Red RAL 3020	1 pc.	kg/1 pc.	
32A / 5P	Red RAL 3020	10	0,20	X100096
		10	0,23	X100119

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

IP 44 **400 V**



POWER SOCKET MOBILE 16A

Type	Color	Pack.	Weight	Index
16A / 4P	Red RAL 3020	1 pc.	kg/1 pc.	
16A / 5P	Red RAL 3020	10	0,16	X100454
		10	0,18	X100461

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

IP 44 **400 V**



POWER SOCKET MOBILE 32A

Type	Color	Pack.	Weight	Index
32A / 4P	Red RAL 3020	1 pc.	kg/1 pc.	
32A / 5P	Red RAL 3020	10	0,24	X100485
		10	0,28	X100492

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

IP 67 **400 V**



POWER PLUG63A

Type	Color	Pack.	Weight	Index
63A / 5P	Red RAL 3020	1 pc.	kg/1 pc.	
		2	0,65	XS53S35

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

IP 67 **400 V**



POWER SOCKET MOBILE 63A

Type	Color	Pack.	Weight	Index
63A / 5P	Red RAL 3020	1 pc.	kg/1 pc.	
		2	0,77	XK53S53

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

POWER PLUGS AND POWER SOCKETS

IP
44

400
V



SOCKET 16A

Type	Color	Pack.	Weight	Index
16A / 4P	Red RAL 3020	1 pc.	kg/1 pc.	
16A / 5P	Red RAL 3020	10	0,16	X100256
		10	0,18	X100270

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

IP
44

400
V



SOCKET 32A

Type	Color	Pack.	Weight	Index
32A / 4P	Red RAL 3020	1 pc.	kg/1 pc.	
32A / 5P	Red RAL 3020	10	0,24	X100300
		10	0,28	X100324

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

IP
44

250
V



PLUG 16A 250V

Type	Color	Pack.	Weight	Index
16A / 3P	Blue RAL 5005	1 pc.	kg/1 pc.	
		10	0,10	XS31S20

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

IP
44

250
V



MOBILE SOCKET 16A 250V

Type	Color	Pack.	Weight	Index
16A / 3P	Blue RAL 5005	1 pc.	kg/1 pc.	
		10	0,14	XK31S20

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

IP
44

250
V



SOCKET 16A 250V

Type	Color	Pack.	Weight	Index
16A / 3P	Blue RAL 5005	1 pc.	kg/1 pc.	
		10	0,20	XD31S20

Norm: IEC 60309 EN60309 VDE 0623
Screw terminals.
The quick closing system.

MOBILE POWER PLUGS AND MOBILE POWER SOCKETS

IP 44 **250 V**



PLUG RUBBER 16A 250 V

Type	Color	Pack.	Weight	Index
16A / 3P 3x15mm ²	Black RAL 9005	1 pc.	kg/1 pc.	
16A / 3P 3x2,5mm ²	Black RAL 9005	10	0,06	X1419190
		10	0,08	X1149290

NORM: 49440/441
Full rubber casing.
For wires 3x1,5 mm² 3x2,5mm²

IP 44 **250 V**



SOCKET RUBBER MOBILE 2P+Z 16A 250V WITH COLLAR

Type	Color	Pack.	Weight	Index
16A/2P+Z	Black RAL 9005	1 pc.	kg/1 pc.	
		5	0,12	X1479291

NORM: 49440/441
Full rubber casing.
For wires 3x1,5 mm²

IP 44 **250 V**



RUBBER SPLITTER 3X2P+Z 16A 250V WITH RUBBER COLLARS IP 44

Type	Color	Pack.	Weight	Index
16A/3x2P+Z	Black RAL 9005	1 pc.	kg/1 pc.	
		5	0,42	X1473292

NORM: 49440/441
3x2P+Z 16A 250V with rubber collars IP 44
Full rubber casing.

MOBILE POWER PLUGS AND MOBILE POWER SOCKETS

IP
44 250
V



PLUG 16A 250V

Type	Color	Pack.	Weight	Index
16A / 3P	Black RAL 9005	1 pc. 10	kg/1 pc. 0,08	X1519100

NORM: 49440/441
3xsockets 250V/16A – flap IP 44
For wires 3x1,5 mm²

IP
44 250
V



PLUG 16A 250V

Type	Color	Pack.	Weight	Index
16A / 3P	Red RAL 3020	1 pc. 10	kg/1 pc. 0,08	X1519140

NORM: 49440/441
Full rubber casing., For wires 3x1,5 mm²

IP
44 250
V



PLUG 16A 250V

Type	Color	Pack.	Weight	Index
16A / 3P	Blue RAL 5005	1 pc. 10	kg/1 pc. 0,08	X1519150

NORM: 49440/441
For wires 3x1,5 mm²

IP
44 250
V



MOBILE SOCKET 2P+Z 16A 250V

Type	Color	Pack.	Weight	Index
16A / 3P	Black RAL 9005	1 pc. 10	kg/1 pc. 0,1	X1579202

Norm NF C61-314, NBN C61-112
For wires 3x1,5 mm²
With IP44 sealing flange and shutters current paths.

IP
44 250
V



MOBILE SOCKET 2P+Z 16A 250V

Type	Color	Pack.	Weight	Index
16A / 3P	Red RAL 3020	1 pc. 10	kg/1 pc. 0,1	X1579242

Norm NF C61-314, NBN C61-112
For wires 3x1,5 mm²
With IP44 sealing flange and shutters current paths.

IP
44 250
V



MOBILE SOCKET 2P+Z 16A 250V

Type	Color	Pack.	Weight	Index
16A / 3P	Blue RAL 5005	1 pc. 10	kg/1 pc. 0,1	X1579252

Norm NF C61-314, NBN C61-112
For wires 3x1,5 mm²
With IP44 sealing flange and shutters current paths.



ZK
Enclosures


IP 44 PCV 650 °C 400 V



THERMOPLASTIC ENCLOSURES PCV 32/25

Type	Color	Pack.	Weight	Index
ZN-32/25	White RAL 9003	1 pc.	kg/1 pc.	
		1	1,82	1851-00

Equipped with a key lock
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 320 x 250 x 195mm




IP 44 PCV 650 °C 400 V



THERMOPLASTIC ENCLOSURES PCV 42/42

Type	Color	Pack.	Weight	Index
ZN-42/42	White RAL 9003	1 pc.	kg/1 pc.	
		1	2,64	1852-00

Equipped with a key lock
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 440 x 423 x 195mm




IP 44 PCV 650 °C 400 V



THERMOPLASTIC ENCLOSURES PCV 1/3 PHASE

Type	Color	Pack.	Weight	Index
ZN-1/3F	White RAL 9003	1 pc.	kg/1 pc.	
		1	2,96	1853-00

Equipped with a key lock
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 436 x 274 x 230mm




IP 44 PCV 650 °C 400 V



THERMOPLASTIC ENCLOSURES PCV 1/3 PHASE WITH PROTECT TYPE S

Type	Color	Pack.	Weight	Index
ZN-1/3F+S	White RAL 9003	1 pc.	kg/1 pc.	
		1	4,56	1854-00

Equipped with a key lock
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 615 x 340 x 230 mm




IP 44 PCV 650 °C 400 V



ROZDZIELNICA THERMOSET ZK-1

Type	Color	Pack.	Weight	Index
ZK-1	White RAL 9003	1 pc.	kg/1 pc.	
		1	8,46	1855-00

Handle patent on the equipment.
NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 614 x 398 x 250 mm




IP 44 PCV 650 °C 400 V



BASEMENT FOR ENCLOSURES TYPE ZK-1

Type	Color	Pack.	Weight	Index
Fundament ZK-1	White RAL 9003	1 pc.	kg/1 pc.	
		1	8,30	1856-00

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 822 x 398 x 250 mm





Meter
boards

METER BOARDS


IP
20
650
°C
400
V
PS



METER BOARDS 1-PHASE

Type	Color	Pack.	Weight	Index
1F	White RAL 9003	1 pc.	kg/pc.	0101-00

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Equipped with a set of mounting screws for the meter.
Dimensions: 154x247x24,3mm




IP
20
650
°C
400
V
PS



METER BOARDS 1/3-PHASE UNIVERSAL 334

Type	Color	Pack.	Weight	Index
3FU/334	White RAL 9003	1 pc.	kg/pc.	0102-00

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Equipped with a set of mounting screws for the meter.
Dimensions: 201x334x12,5mm




IP
20
650
°C
400
V
PS



METER BOARDS 3-PHASE

Type	Color	Pack.	Weight	Index
3F	White RAL 9003	1 pc.	kg/pc.	0103-00

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Equipped with a set of mounting screws for the meter.
Dimensions: 199x327x24,7mm




IP
20
650
°C
400
V
PS



METER BOARDS CLOCK

Type	Color	Pack.	Weight	Index
TZ	White RAL 9003	1 pc.	kg/pc.	0109-00

NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
Dimensions: 107,5x181x15,4mm



METER BOARDS


IP
20
650
°C
400
V
PS



METER BOARDS 1-PHASE WITH SPACE FOR SECURITY 7XS

Type	Color	Pack.	Weight	Index
1F7	White RAL 9003	1 pc. 6	kg/pc. 0,59	0111-00

Modules – 7 PE+N terminal included
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 N 1x(3x10mm²+2x16mm²)
 PE 1x(3x10mm²+2x16mm²)
 Equipped with a set of mounting screws for the meter.
 Dimensions: 151x420x30mm




IP
20
650
°C
400
V
PS



METER BOARDS 1-PHASE WITH SPACE FOR SECURITY 7XS WITH GLASS

Type	Color	Pack.	Weight	Index
1F7S	White RAL 9003	1 pc. 6	kg/pc. 0,60	0112-00

Modules – 7 PE+N terminal included
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 N 1x(3x10mm²+2x16mm²)
 PE 1x(3x10mm²+2x16mm²)
 Equipped with a set of mounting screws for the meter.
 Dimensions: 151x420x30mm




IP
20
650
°C
400
V
PS



METER BOARDS 3-PHASE WITH SPACE FOR SECURITY 9XS

Type	Color	Pack.	Weight	Index
3F9	White RAL 9003	1 pc. 6	kg/pc. 0,82	0113-00

Modules – 9 PE+N terminal included
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 N 1x(5x10mm²+2x16mm²)
 PE 1x(5x10mm²+2x16mm²)
 Equipped with a set of mounting screws for the meter.
 Dimensions: 200x524,6x30mm




IP
20
650
°C
400
V
PS



METER BOARDS 3-PHASE WITH SPACE FOR SECURITY 9XS WITH GLASS

Type	Color	Pack.	Weight	Index
3F9S	White RAL 9003	1 pc. 6	kg/pc. 0,83	0114-00

Modules – 9 PE+N terminal included
 NORM: PN-EN 62208:2011, PN-EN 60670-24:2013
 N 1x(5x10mm²+2x16mm²)
 PE 1x(5x10mm²+2x16mm²)
 Equipped with a set of mounting screws for the meter.
 Dimensions: 200x524,6x30mm





CABLE TIES



CABLE TIES BLACK

Type	Size [mm]		Color	Pack. 1 pc.	Weight opak./kg	Index
	A	B				
cable tie	2,5	100	Black RAL 9005	100	0,30	WI008017
cable tie	3,6	140	Black RAL 9005	100	0,80	WI008048
cable tie	4,8	200	Black RAL 9005	100	1,42	WI008116
cable tie	4,8	300	Black RAL 9005	100	2,00	WI008130
cable tie	4,8	365	Black RAL 9005	100	2,20	WI008147
cable tie	2,5	100	Black RAL 9005	25	0,10	WI080112
cable tie	3,6	140	Black RAL 9005	25	0,22	WI080419
cable tie	4,8	200	Black RAL 9005	25	0,38	WI081133
cable tie	4,8	300	Black RAL 9005	25	0,56	WI081331
cable tie	4,8	365	Black RAL 9005	25	0,72	WI081423
cable tie	3,6	140	Black RAL 9005	25	0,22	WI080419
cable tie	4,8	200	Black RAL 9005	25	0,38	WI081133
cable tie	4,8	300	Black RAL 9005	25	0,56	WI081331
cable tie	2,5	100	Black RAL 9005	25	0,10	WI080112
cable tie	mix	mix	Black RAL 9005	5x15	1,00	WI014919


For fixing of cables, wires, pipes, connecting of the coils of cables.
CABLE TIES with vinyl.
MIX pack included: 2,5x100;3,6x140;4,8x200;4,8x300;4,8x365 / 15 pc.



CABLE TIES WHITE

Type	Size [mm]		Color	Pack. 1 pc.	Weight opak./kg	Index
	A	B				
cable tie	2,5	100	White RAL 9003	100	0,30	WI080129
cable tie	2,5	100	White RAL 9003	25	0,80	WI080136
cable tie	3,6	140	White RAL 9003	100	1,42	WI080426
cable tie	3,6	140	White RAL 9003	25	2,00	WI080433
cable tie	4,8	200	White RAL 9003	100	2,20	WI081119
cable tie	4,8	200	White RAL 9003	25	0,10	WI081140
cable tie	4,8	300	White RAL 9003	100	0,22	WI081317
cable tie	4,8	300	White RAL 9003	25	0,38	WI081348
cable tie	4,8	365	White RAL 9003	100	0,56	WI081454
cable tie	4,8	365	White RAL 9003	25	0,72	WI081461
cable tie	3,6	140	White RAL 9003	25	0,22	WI080433
cable tie	4,8	200	White RAL 9003	25	0,38	WI081140
cable tie	4,8	300	White RAL 9003	25	0,56	WI081348
cable tie	2,5	100	White RAL 9003	25	0,10	WI080136
cable tie	mix	mix	White RAL 9003	5x15	1,00	WI001490


For fixing of cables, wires, pipes, connecting of the coils of cables.
CABLE TIES with vinyl.
MIX pack included: 2,5x100;3,6x140;4,8x200;4,8x300;4,8x365 /15 pc.



	SELF-EXTINGUISHING
	STABLE-40°C +85°C
	RESISTANT TO UV
	RESISTANT TO OILS, SALTS, ALKALI

ACCESSORIES


STEEL



MOUNTING RAIL TS 35 / 1 MB

Type	Color	Pack.	Weight	Index
DIN35	-	1 pc.	kg/1 pc.	
		10	0,33	09446-00

Steel mounting rail TS 35 / 1mb




400 V




SWITCHING RAIL EPSŁ / 1 MB

Type	Color	Pack.	Weight	Index
EPSŁ – 1P 25 A/1mb	White RAL 9016	1 pc.	kg/1 pc.	
		1	0,25	09447-00

Casing: plastic
Rail: copper
NORM: PN-EN60439-1, PNEN60439-2



400 V



SWITCHING RAIL EPSŁ / 1MB

Type	Color	Pack.	Weight	Index
EPSŁ – 3P 63 A/1mb	White RAL 9016	1 pc.	kg/1 pc.	
		1	0,6	09448-00

Casing: plastic
Rail: copper
NORM: PN-EN60439-1, PNEN60439-2.




PS



GRILL, 5 POLES

Type	Color	Pack.	Weight	Index
Zaślepka	White RAL 9016	1 pc.	kg/1 pc.	
		100	0,9	3301-00

Mask unused spaces in enclosures.




PCV



RUBBER GLAND Ø 20

Type	Color	Pack.	Weight	Index
Gland Ø 20	-	1 pc.	kg/1 pc.	
		100	0,003	024003-00



ACCESSORIES TERMINAL BARS


400 V PE



TERMINAL BAR 7-WAY

Type	Color	Pack.	Weight	Index
LZ-7/N	Blue RAL 5005	1 pc.	kg/1 pc.	
LZ-7/N	Green RAL 6018	20	0,04	0920-00
LZ-7/N	Green RAL 6018	20	0,04	0920-01

Terminal bar 7-way for mounting on a rail TH35




400 V PE



TERMINAL BAR 12-WAY

Type	Color	Pack.	Weight	Index
LZ-12/N	Blue RAL 5005	1 pc.	kg/1 pc.	
LZ-12/N	Blue RAL 5005	20	0,05	0921-00
LZ-12/N	Green RAL 6018	20	0,05	0921-01

Terminal bar 12-way for mounting on a rail TH35




400 V PE



TERMINAL BAR 18-WAY

Type	Color	Pack.	Weight	Index
LZ-18/N	Blue RAL 5005	1 pc.	kg/1 pc.	
LZ-18/N	Blue RAL 5005	20	0,07	0922-00
LZ-18/N	Green RAL 6018	20	0,07	0922-01

Terminal bar 18-way for mounting on a rail DIN 35




400 V PE



TERMINAL BAR 2X5-WAY

Type	Color	Pack.	Weight	Index
L2-5+5	Blue RAL 5005	1 pc.	kg/1 pc.	
L2-5+5	Blue RAL 5005	20	0,07	0924-00
L2-5+5	Green RAL 6018	20	0,07	0924-01

Terminal bar 18-way for mounting on a rail DIN 35



ACCESSORIES CABLE GLANDS


IP 68 UV PA



CABLE GLAND THREADED PG-21

Type	Color	Pack.	Weight	Index
PG-21	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,025	09465-00

Protection degree IP68
For wires Ø13-18 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C




IP 68 UV PA



CABLE GLAND THREADED PG-29

Type	Color	Pack.	Weight	Index
PG-29	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,042	09466-00

Protection degree IP68
For wires Ø18-25 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C




IP 68 UV PA



CABLE GLAND THREADED PG-36

Type	Color	Pack.	Weight	Index
PG-36	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,057	09467-00

Protection degree IP68
For wires Ø22-32 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C




IP 68 UV PA



CABLE GLAND THREADED PG-42

Type	Color	Pack.	Weight	Index
PG-42	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,07	09468-00

Protection degree IP68
For wires Ø32-38 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C



IP 68 UV PA



CABLE GLAND THREADED PG-48

Type	Color	Pack.	Weight	Index
PG-48	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,09	9469-00

Protection degree IP68
For wires Ø37-44 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C

ACCESSORIES CABLE GLANDS

IP 68 UV PA



CABLE GLAND THREADED PG-7

Type	Color	Pack.	Weight	Index
PG-7	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,02	09460-00

Protection degree IP68
For wires Ø3-6,5 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C

IP 68 UV PA



CABLE GLAND THREADED PG-9

Type	Color	Pack.	Weight	Index
PG-9	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,02	09461-00

Protection degree IP68
For wires Ø4-8 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C


IP 68 UV PA



CABLE GLAND THREADED PG-11

Type	Color	Pack.	Weight	Index
PG-11	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,01	09462-00

Protection degree IP68
For wires Ø5-10 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C




IP 68 UV PA



CABLE GLAND THREADED PG-13,5

Type	Color	Pack.	Weight	Index
PG-13,5	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,012	09463-00

Protection degree IP68
For wires Ø6-12 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C




IP 68 UV PA



CABLE GLAND THREADED PG-16

Type	Color	Pack.	Weight	Index
PG-16	Grey RAL 7035	1 pc. 10	kg/1 pc. 0,02	09464-00

Protection degree IP68
For wires Ø10-14 mm
Material: poliamid 6.6
Thermal condition: -40°C - +100°C



ACCESSORIES HOLDERS



BAKELITE HOLDER SMOOTH E-14

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
E-14	Black	50	0,03	1802-01



BAKELITE HOLDER SMOOTH E-27

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
E-27	Black	30	0,03	1806-01



HOLDER SMOOTH E-14

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
E-14	White	50	0,02	1803-00

Oprawka termoplastyczna gładka E-14 biała do zastosowania w oświetleniu



HOLDER SMOOTH E - 27

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
E-27	White	30	0,02	1812-00



HOLDER SMOOTH E-14

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
E-14	Black	50		1813-01

Holder thermoplastic threaded double collar E-27 black
Holder thermoplastic threaded double collar
E-14 black



HOLDER SMOOTH E-14 + COLLAR

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
E-14	White	50		1804-00

Holder thermoplastic threaded with collar E-14 white do zastosowania w oświetleniu



HOLDER SMOOTH E-14 +COLLAR

Type	Color	Pack.	Weigh	Index
		bulk	kg/100 pc.	
E-14	Black	50		1811-01

Oprawka termoplastyczna gwintowana z kołnierzem E-14 czarna do zastosowania w oświetleniu



HOLDER THREADED E-27

Type	Color	Pack.	Weigh	Index
E-27	White	bulk 30	kg/100 pc.	1807-00



HOLDER THREADED E-27 + DOUBLE COLLAR

Type	Color	Pack.	Weigh	Index
E-27	White	bulk 30	kg/100 pc.	1809-00

Holder thermoplastic threaded double collar E-27 white



HOLDER THREADED E-27 + DOUBLE COLLAR

Type	Color	Pack.	Weigh	Index
E-27	Black	bulk 30	kg/100 pc.	1810-01

Holder thermoplastic threaded double collar E-27 black



HOLDER STEEL THREADED E-27

Type	Color	Pack.	Weigh	Index
E-27	metal	bulk 30	kg/100 pc.	1800-00



HOLDER STEEL THREADED E-27

Type	Color	Pack.	Weigh	Index
E-27	metal	bulk 30	kg/100 pc.	1801-00



HOLDER THREADED E-27 WITH HANDLE

Type	Color	Pack.	Weigh	Index
E-27	White	bulk 30	kg/100 pc.	1820-00


Holder thermoplastic threaded develop E-27 white+cable with handle

Wyłączniki nadprądowe CLS6

- Znamionowa zwarciova zdolność łączeniowa 6 kA wg IEC/EN 60898
- Dopasowane są konturem oraz wyglądem zewnętrznym do wyłączników różnicowoprądowych serii EPRPG, EPFPNG
- Wysoka selektywność w stosunku do poprzedzającego zabezpieczenia topikowego dzięki niewielkiej energii przepuszczanej
- Zaciski przyłączeniowe windowe: górne i dolne
- Możliwość oszynowania z góry i z dołu

- Spełniają wymagania koordynacji izolacji, odstęp zestyków ≥ 4 mm, dla pewniejszego elektrycznego rozłączenia
- Podłączenie zasilania dowolne (z góry lub z dołu)

Schematy połączeń

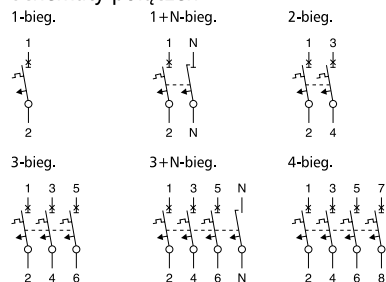

- Znamionowa zwarciova zdolność łączeniowa 6 kA wg IEC/EN60947-2
- Możliwość równoległego podłączenia przewodów oraz szyny fazowej

Dane techniczne


Elektryczne

Wykonanie zgodne z	IEC/EN 60898
Aktualne atesty zgodnie z nadrukiem	
Napięcie znamionowe	
CLS6	AC: 230/400V
CLS6	C: 48V (na bieg.)
	C: 250V (na bieg.)
Częstotliwość	50/60 Hz
Znamionowa zwarciova zdolność łączeniowa IEC/EN 60898	
CLS6	6 kA
Znamionowa zwarciova zdolność łączeniowa IEC/EN 60947-2	
CLS6-C	6 kA
Charakterystyki	B, C -
Dobezpieczenie topikowe > 6 kA	maks. 100 A gL
Klasa ograniczenia energii	3
Trwałość	≥ 8.000 przestawień
Kierunek zasilania	dowolny (z góry lub z dołu)

Mechaniczne

Wysokość czoła	45 mm
Wysokość aparatu	80 mm
Szerokość	17,5 mm na bieg. (1 mod.)
Montaż	na szynie standardowej TS 35 mm IEC/EN 60715
Stopień ochrony	IP20
Zaciski z góry i z dołu	szynowe/windowe
Ochrona zacisków	przed palcami i dłońmi BGV A3, ÖVE-EN 6
Przekrój zacisków przyłączeniowych	1-25 mm ²
Moment dociskowy śrub zaciskowych	2-2,4 Nm
Grubość szyn łączeniowych	0,8 - 2 mm


Wymiary (mm)

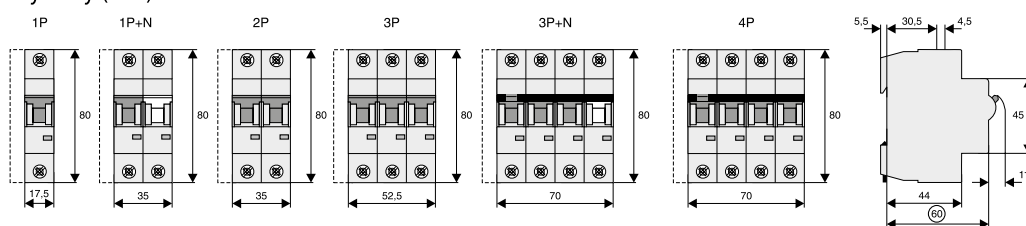


CONNECTION DIAGRAMS

Charakterystyki wyzwalania (IEC/EN 60898)

Charakterystyka B

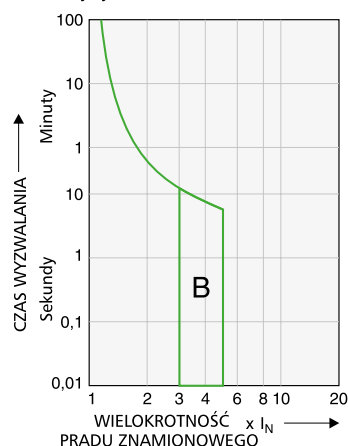


Charakterystyka C

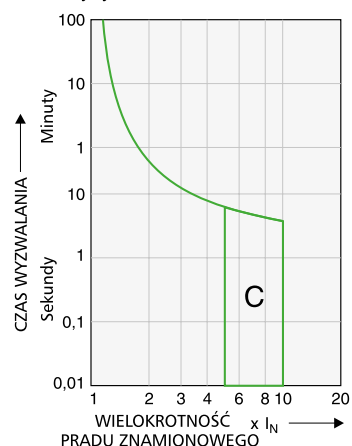


Obciążalność

Współczynnik korekcyjny K_N w zależności od ilości aparatów zamontowanych obok siebie (1 bieg.)

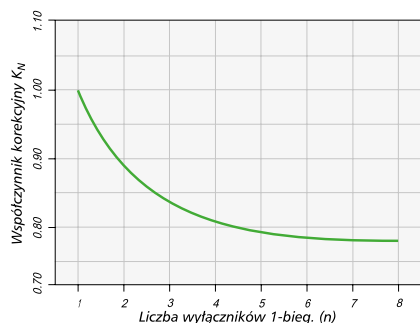


Wpływ temperatury otoczenia

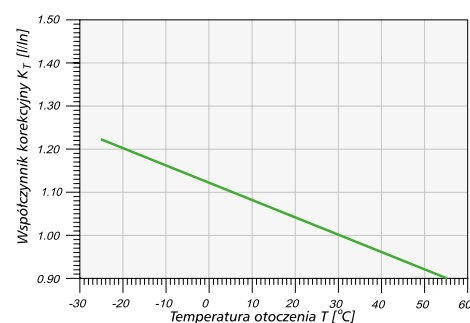


Energia przenoszona EP56

Energia przenoszona EP56. Charakterystyka B, 1-biegunowy

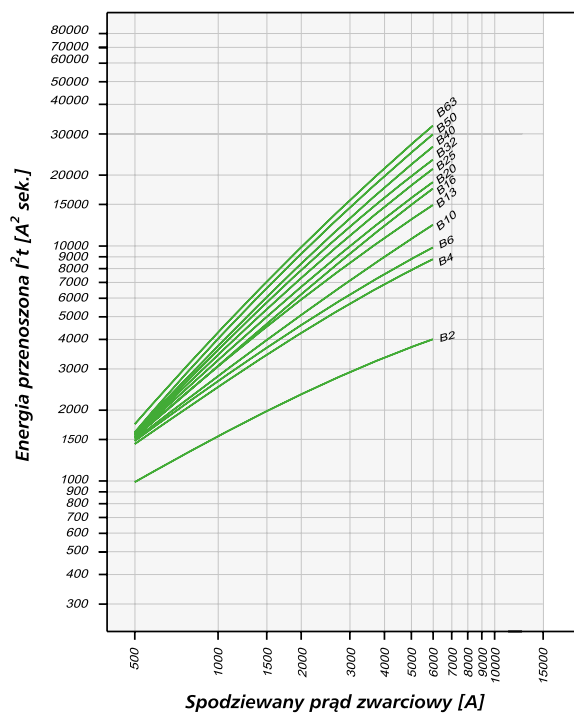

Energia przenoszona EP56. Charakterystyka C, 1-biegunowy

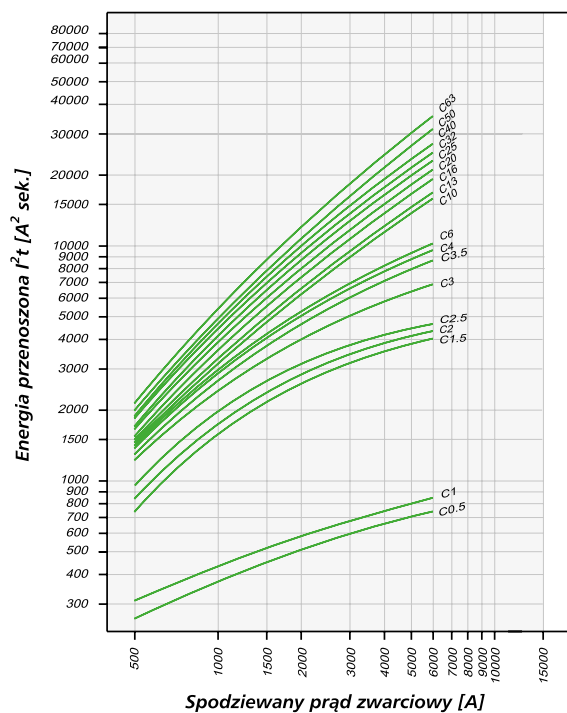

Określone zgodnie z EN 60898

CONNECTION DIAGRAMS

Selektywność CLS6

- Selektywność wyłączników CLS6 (w kA) i poprzedzającego zabezpieczenia topikowego D0 lub NH typ gL/gG
- 1,4 ... selektywność do 1,4 kA; ... brak selektywności

Poprzedzające zabezpieczenie D01, D02, D03

Prąd znamionowy I _n CLS6 w A		Prąd znamionowy zabezpieczenia poprzedzającego w A gL/gG								
		10	16	20	25	35	50	63	80	100
Charakterystyka B	2	<0,5	<0,5	0,5	0,8	2,2	6,0	6,0	6,0	6,0
	4	<0,5	<0,5	<0,5	0,5	1,2	3,1	5,5	6,0	6,0
	6		<0,5	<0,5	0,5	1,2	2,7	4,5	6,0	6,0
	10			<0,5	0,5	1,1	2,3	3,6	5,0	6,0
	13			<0,5	0,5	1,0	2,0	3,1	4,3	6,0
	16				0,5	1,0	1,7	2,8	3,8	6,0
	20					0,9	1,6	2,7	3,6	6,0
	25					0,9	1,6	2,5	3,3	6,0
	32						1,6	2,3	3,0	5,8
	40							2,2	2,9	5,3
	50							2,1	2,7	4,8
	63									4,5
Charakterystyka C	0,5	<0,5	1,1	6,0	6,0	6,0	6,0	6,0	6,0	6,0
	1	<0,5	0,8	3,9	6,0	6,0	6,0	6,0	6,0	6,0
	2	<0,5	<0,5	0,5	0,8	1,7	6,0	6,0	6,0	6,0
	3	<0,5	<0,5	<0,5	0,6	1,3	4,3	6,0	6,0	6,0
	4	<0,5	<0,5	<0,5	0,6	1,2	2,7	4,7	6,0	6,0
	6		<0,5	<0,5	0,6	1,1	2,3	4,0	6,0	6,0
	10			<0,5	0,6	1,1	1,9	2,8	3,9	6,0
	13					1,0	1,8	2,7	3,7	6,0
	16					1,0	1,7	2,5	3,3	6,0
	20					0,9	1,6	2,3	3,1	6,3
	25						1,5	2,2	2,9	5,7
	32							2,1	2,7	5,3
	40								2,6	5,0
	50									4,5
	63									

Poprzedzające zabezpieczenie NH 00

Prąd znamionowy I _n CLS6 w A		Prąd znamionowy zabezpieczenia poprzedzającego w A gL/gG										
		16	20	25	35	40	50	63	80	100		
Charakterystyka B	2	<0,5	<0,5	0,6	3,2	6,0	6,0	6,0	6,0	6,0		
	4	<0,5	<0,5	<0,5	1,2	1,8	3,0	4,8	7,2	6,0		
	6	<0,5	<0,5	<0,5	1,1	1,6	2,6	4,0	5,8	6,0		
	10		<0,5	<0,5	1,1	1,5	2,2	3,2	4,5	6,0		
	13		<0,5	<0,5	1,0	1,4	2,0	2,9	4,0	6,0		
	16			<0,5	0,9	1,3	1,8	2,6	3,5	6,0		
	20				0,9	1,3	1,7	2,4	3,3	6,0		
	25				0,9	1,1	1,6	2,3	3,1	5,5		
	32				0,8	1,1	1,5	2,1	2,9	5,0		
	40						1,5	2,0	2,8	4,6		
	50							1,9	2,7	4,2		
	63									3,9		
	Charakterystyka C	0,5	0,9	2,7	6,0	6,0	6,0	6,0	6,0	6,0	6,0	
1		0,7	2,0	1,0	6,0	6,0	6,0	6,0	6,0	6,0		
2		<0,5	<0,5	0,6	2,2	4,2	6,0	6,0	6,0	6,0		
3		<0,5	<0,5	0,5	1,4	2,1	4,0	6,0	6,0	6,0		
4		<0,5	<0,5	<0,5	1,1	1,5	2,5	4,0	6,0	6,0		
6		<0,5	<0,5	<0,5	1,0	1,4	2,3	3,6	5,3	6,0		
10				<0,5	0,9	1,3	1,8	2,6	3,6	6,0		
13					0,9	1,3	1,7	2,5	3,5	6,0		
16					0,9	1,1	1,6	2,3	3,2	5,8		
20					0,8	1,1	1,5	2,1	3,0	5,3		
25							1,4	2,0	2,8	4,8		
32								1,9	2,6	4,5		
40									2,5	4,3		
50									4,0			
63												





Junction boxes

- JUNCTION BOXES FLUSH MOUNTED
- JUNCTION BOXES HERMETIC
- ACCESSORIES


IP 30 850 °C 400 V

NEW

JUNCTION BOX Ø 60 FOR HOLLOW WALLS
WINDPROOF 2K02

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
2K02	Red RAL 2012	25	2,00	1865-00

For screw or claw mounting of fixtures. Operating voltage 400 V.
- marking of cable entry on 2K membrane
- windproof box equipped with holes for wires and M25 pesh
- possibility to insert the power wires at the angle of 90°
- connection opening ensures tightness of pass-through cabling thanks to hermetic connection elements.
The size of the milled hole Ø 68. Dimensions: Ø 71x depth. 61 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F TO HOLLOW WALLS

Type	Color	Pack.	Weight	Index
PK-60 GK	Red RAL 2012	pc.	kg/100 pc.	
		40	2,50	0201-00

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997.
The size of the milled hole Ø 68. Dimensions: Ø 60x depth. 47 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F TO HOLLOW WALLS DEEP

Type	Color	Pack.	Weight	Index
PK-60 GK	Red RAL 2012	pc.	kg/100 pc.	
		40	2,70	0220-00

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997.
The size of the milled hole Ø 68. Dimensions: Ø 60x depth. 62 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PO-70F TO HOLLOW WALLS

Type	Color	Pack.	Weight	Index
PO-70 GK	Red RAL 2012	pc.	kg/100 pc.	
		40	3,30	0204-00

Work voltage 250 V.
NORM: PN-E-93208:1997.
The size of the milled hole Ø 72-74. Dimensions: Ø 70x depth. 37 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PO-80F TO HOLLOW WALLS

Type	Color	Pack.	Weight	Index
PO-80 GK	Red RAL 2012	pc.	kg/100 pc.	
		35	3,60	0209-00

Work voltage 250 V.
NORM: PN-E-93208:1997.
The size of the milled hole Ø 82-84. Dimensions: Ø 80x depth. 50 mm




PP



POSITIONER FOR JUNCTION BOX

Type	Color	Pack.	Weight	Index
Positioner	Grey RAL 7043	pc.	kg/100 pc.	
		10	4,50	0237-00

Facilitates routing and cutting holes for single and multiple junction boxes.
The device has built-in contours.




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-2X60F TO HOLLOW WALLS

Type	Color	Pack.	Weight	Index
PK-2x60 GK	Red RAL 2012	30 pc.	5,30 kg/100 pc.	0210-00

For mounting accessories for screws or claws. Work voltage 250 V.
 NORM: PN-E-93208:1997. The size of the milled hole 2 x Ø 67.
 Inside dimensions: 135x61x46 mm
 Dimensions: 2x Ø 60x depth. 47 mm
 Possibility to order a version for masonry without GK pawls and positioning screws Index: 0210-10




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-3X60F TO HOLLOW WALLS

Type	Color	Pack.	Weight	Index
PK-3x60 GK	Red RAL 2012	20 pc.	7,60 kg/100 pc.	0234-00

For mounting accessories for screws or claws. Work voltage 250 V.
 NORM: PN-E-93208:1997. The size of the milled hole 3 x Ø 67.
 Inside dimensions: 204x61x46 mm
 Dimensions: 3 x Ø 60x depth. 47 mm
 Possibility to order a version for masonry without GK pawls and positioning screws Index: 0234-10




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-4X60F TO HOLLOW WALLS

Type	Color	Pack.	Weight	Index
PK-4x60 GK	Red RAL 2012	20 pc.	8,80 kg/100 pc.	0235-00

For mounting accessories for screws or claws. Work voltage 250 V.
 NORM: PN-E-93208:1997. The size of the milled hole 4 x Ø 67.
 Inside dimensions: 275x61x46 mm
 Dimensions: 4 x Ø 60x 47 mm
 Possibility to order a version for masonry without GK pawls and positioning screws Index: 0234-10




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-2X60F TO HOLLOW WALLS

Type	Color	Pack.	Weight	Index
PK-2x60 GK	Red RAL 2012	30 pc.	5,30 kg/100 pc.	0286-00

NORM: PN-E-93208:1997.
 For mounting accessories for screws or claws. Rated voltage 250V
 The size of the milled hole 2xØ67
 Inside dimensions: 135x54x58 mm
 Dimensions: 2x Ø60 x depth. 63 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-3X60F TO HOLLOW WALLS

Type	Color	Pack.	Weight	Index
PK-3x60 GK	Red RAL 2012	20 pc.	7,60 kg/100 pc.	0287-00

NORM: PN-E-93208:1997.
 For mounting accessories for screws or claws. Rated voltage 250V
 The size of the milled hole 3xØ67
 Inside dimensions: 205x54x58 mm
 Dimensions: 3x Ø60 x depth. 63 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-4X60F TO HOLLOW WALLS

Type	Color	Pack.	Weight	Index
PK-4x60 GK	Red RAL 2012	16 pc.	8,80 kg/100 pc.	0288-00

NORM: PN-E-93208:1997.
 For mounting accessories for screws or claws. Rated voltage 250V
 The size of the milled hole 4xØ67
 Inside dimensions: 275x54x58 mm
 Dimensions: 4x Ø60 x depth. 63 mm




IP 20 850 °C Br Cl 250 V PP



JUNCTION BOX P/T PK-60 TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PK-60 GK	Yellow RAL 1021	pc. 40	kg/100 pc. 2,50	0201-0N

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Self-extinguishin 850°C.
The size of the milled hole $\varnothing$ 68. Dimensions: $\varnothing$ 67x depth. 47 mm




IP 20 850 °C Br Cl 250 V PP



JUNCTION BOX P/T PK-60 TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PK-60 GK	Yellow RAL 1021	pc. 40	kg/100 pc. 2,70	0220-0N

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Self-extinguishin 850°C.
The size of the milled hole $\varnothing$ 68. Dimensions: $\varnothing$ 60x depth. 62 mm




IP 20 850 °C Br Cl 250 V PP



JUNCTION BOX P/T PO-70 TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PO-70 GK	Yellow RAL 1021	pc. 40	kg/100 pc. 3,50	0204-0N

Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Self-extinguishin 850°C.
The size of the milled hole $\varnothing$ 72-74. Dimensions: $\varnothing$ 70x depth. 47 mm




IP 20 850 °C Br Cl 250 V PP



JUNCTION BOX P/T PO-80 TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PO-80 GK	Yellow RAL 1021	pc. 35	kg/100 pc. 3,60	0209-0N

Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Self-extinguishin 850°C.
The size of the milled hole $\varnothing$ 82-84. Dimensions: $\varnothing$ 80x depth. 50 mm




IP 20 850 °C Br 250 V PP




JUNCTION BOX P/T PK-2X60 TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PK-2x60 GK	Yellow RAL 1021	30 pc.	5,30 kg/100 pc.	0210-0N

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Self-extinguishin 850°C.
The size of the milled hole $\varnothing 2 \times \varnothing 67$.
Inside dimensions: 135x61x46 mm
Dimensions: 2x $\varnothing 60$ x depth. 47 mm




IP 20 850 °C Br 250 V PP



JUNCTION BOX P/T PK-3X60 TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PK-3x60 GK	Yellow RAL 1021	20 pc.	7,60 kg/100 pc.	0234-0N

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Self-extinguishin 850°C.
The size of the milled hole $3 \times \varnothing 67$.
Inside dimensions: 204x61x46 mm
Dimensions: 3x $\varnothing 60$ x depth. 47 mm




IP 20 850 °C Br 250 V PP



JUNCTION BOX P/T PK-4X60 TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PK-4x60 GK	Yellow RAL 1021	20 pc.	8,80 kg/100 pc.	0235-0N

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Self-extinguishin 850°C.
The size of the milled hole $4 \times \varnothing 67$.
Inside dimensions: 275x61x46 mm
Dimensions: 4x $\varnothing 60$ x depth. 47 mm




IP 20 850 °C 250 V PP Br Cl



JUNCTION BOX P/T PK-2X60F TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PK-2x60 GK	Yellow RAL 1021	30 pc.	5,30 kg/100 pc.	0286-0N

NORM: PN-E-93208:1997, PN-EN 60670-1:2007
For mounting accessories for screws or claws. Rated voltage 250V
The size of the milled hole $2 \times \varnothing 67$
Inside dimensions: 135x54x58 mm
Dimensions: 2x $\varnothing 60$ x depth. 63 mm




IP 20 850 °C 250 V PP Br Cl



JUNCTION BOX P/T PK-3X60F TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PK-3x60 GK	Yellow RAL 1021	20 pc.	7,60 kg/100 pc.	0287-0N

NORM: PN-E-93208:1997, PN-EN 60670-1:2007
For mounting accessories for screws or claws. Rated voltage 250V
The size of the milled hole $3 \times \varnothing 67$
Inside dimensions: 205x54x58 mm
Dimensions: 3x $\varnothing 60$ x depth. 63 mm




IP 20 850 °C 250 V PP Br Cl



JUNCTION BOX P/T PK-4X60F TO HOLLOW WALLS SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
PK-4x60 GK	Yellow RAL 1021	16 pc.	8,80 kg/100 pc.	0288-0N

NORM: PN-E-93208:1997, PN-EN 60670-1:2007
For mounting accessories for screws or claws. Rated voltage 250V
The size of the milled hole $4 \times \varnothing 67$
Inside dimensions: 275x54x58 mm
Dimensions: 4x $\varnothing 60$ x depth. 63 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F PRO

Type	Color	Pack.	Weight	Index
PK-60 PRO	Red RAL 2012	pc.	kg/100 pc.	
		100	1,20	0281-00

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Without positioning screws.
Inside dimensions: 60x40 mm
Dimensions: Ø 60x depth. 41 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F PRO WITH SCREWS

Type	Color	Pack.	Weight	Index
PK-60 PRO	Red RAL 2012	pc.	kg/100 pc.	
		100	1,30	0281-01

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. With screws.
Inside dimensions: 60x40 mm
Dimensions: Ø 60x depth. 41 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F LUX DREDGED

Type	Color	Pack.	Weight	Index
PK-60 LUX	Red RAL 2012	pc.	kg/100 pc.	
		60	1,80	0206-50

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Deeper without screws.
Inside dimensions: 60x62 mm
Dimensions: Ø 60x depth. 63 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F LUX DREDGED WITH SCREWS

Type	Color	Pack.	Weight	Index
PK-60 LUX	Red RAL 2012	pc.	kg/100 pc.	
		60	1,93	0206-51

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Deeper with screws.
Dimensions: Ø 60x depth. 63 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PO-70F PRO

Type	Color	Pack.	Weight	Index
PO-70 PRO	Red RAL 2012	pc.	kg/100 pc.	
		60	2,70	0282-00

Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Cover included.
Inside dimensions: 70x37 mm
Dimensions: Ø 70x depth. 37 mm




IP 20 650 °C 250 V PP



JUNCTION BOX P/T PO-80F PRO

Type	Color	Pack.	Weight	Index
PO-80 PRO	Red RAL 2012	pc.	kg/100 pc.	
		50	3,35	0283-00

Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Cover included.
Inside dimensions: 70x37 mm
Dimensions: Ø 80x depth. 50 mm





IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F PRO CONNECTED PLATE

Type	Color	Pack.	Weight	Index
PK-60 PRO	Red RAL 2012	90 pc.	kg/100 pc. 1,45	0284-00

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Connected plate with screws.
Internal dimensions: 60x41 mm
Dimensions: Ø 60x depth 41 mm





IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F PRO CONNECTED PLATE WITH SCREWS

Type	Color	Pack.	Weight	Index
PK-60 PRO	Red RAL 2012	90 pc.	kg/100 pc. 1,56	0284-01

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Connected plate with screws.
Internal dimensions: 60x41 mm
Dimensions: Ø 60x depth 41 mm





IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F PRO CONNECTED DEEP

Type	Color	Pack.	Weight	Index
PK-60 PRO	Red RAL 2012	60 pc.	kg/100 pc. 1,91	0285-00

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Connected deep without screws.
Internal dimensions: 60x62 mm
Dimensions: Ø 60x depth 61 mm





IP 20 650 °C 250 V PP



JUNCTION BOX P/T PK-60F PRO CONNECTED DEEP WITH SCREWS

Type	Color	Pack.	Weight	Index
PK-60 PRO	Red RAL 2012	60 pc.	kg/100 pc. 1,95	0285-01

For mounting accessories for screws or claws. Work voltage 250 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Connected deep with screws.
Internal dimensions: 60x62 mm
Dimensions: Ø 60x depth 61 mm






NEW

**JUNCTION BOX
FOR CONNECTING HOUSEHOLD APPLIANCES**

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Junction box AGD	White RAL 9003	10	4,25	3040115

NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Equipment: terminal 5x(2x2,5mm²) 400V
Dimensions: 82mm height x 82mm width x 21mm depth
Used for connecting household appliances, 3-phase induction hobs.




Junction box
for connecting
household
appliances



650
°C PP**JUNCTION BOX COVER Ø60**


Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Junction box cover	White RAL 9003	50	1,10	028404-00

Used to mask the junction box.

650
°C PP**JUNCTION BOX COVER Ø70**


Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Junction box cover	White RAL 9003	100	1,20	020502-00

Used to mask the junction box.

650
°C PP**JUNCTION BOX COVER Ø80**


Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Junction box cover	White RAL 9003	100	1,30	020902-00

Used to mask the junction box.

650
°C PS**JUNCTION BOX COVER Ø70/Ø80 UNIVERSAL**


Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Junction box cover	White RAL 9003	200	1,10	3313-00

Used to mask the junction box.

650
°C PE**SIGNALING COVER**

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Junction box cover	Red RAL 2012	100	0,45	0202-02

The cover is used to secure the hole of the junction box while plastering the wall




IP 20 650 °C 250 V PP



SPACER RING FOR JUNCTION BOX PK60 12 MM

Type	Color	Pack.	Weight	Index
Spacer ring	Red RAL 2012	pc. 50	kg/100 pc. 0,72	028402-00

NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Dimensions: Ø 60x wys. 12 mm




IP 20 650 °C 250 V PP



SPACER RING FOR JUNCTION BOX PK60 12 MM Z

Type	Color	Pack.	Weight	Index
Spacer ring	Red RAL 2012	pc. 50	kg/100 pc. 0,82	028402-01

NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Ring with screws.
Dimensions: Ø 60x wys. 12 mm




IP 20 650 °C 250 V PP



SPACER RING FOR JUNCTION BOX PK60 24 MM

Type	Color	Pack.	Weight	Index
Spacer ring	Red RAL 2012	pc. 50	kg/100 pc. 1,2	028403-00

NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Dimensions: Ø 60x wys. 24 mm




IP 20 650 °C 250 V PP



SPACER RING FOR JUNCTION BOX PK60 24 MM WITH SCREWS

Type	Color	Pack.	Weight	Index
Spacer ring	Red RAL 2012	pc. 50	kg/100 pc. 1,3	028403-01

NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Ring with screws.
Dimensions: Ø 60x wys. 24 mm




IP 40 650 °C 400 V PP



INSTALL BOX FLUSH MOUNTED JUNCTION BOX TO HOLLOW WALLS 89X89X50

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Install-Box KG	Red RAL 2012	36	5,50	0260-00
Install-Box KGS 850°C	Yellow RAL 1021	36	5,50	0260-0N

Work voltage 400V.
It has claws for mounting in empty walls.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Internal dimensions: 77x77x49 mm
Dimensions of the bottom: 89x89x50 mm




IP 40 650 °C 400 V PP



INSTALL BOX FLUSH MOUNTED JUNCTION BOX TO HOLLOW WALLS 95X95X50

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Install-Box KG	Red RAL 2012	30	7,40	0261-00
Install-Box KGS 850°C	Yellow RAL 1021	30	7,40	0261-0N

Work voltage 400V.
It has claws for mounting in empty walls.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Internal dimensions: 87x87x49 mm
Dimensions of the bottom: 98x98x50 mm




IP 40 650 °C 400 V PP



INSTALL BOX FLUSH MOUNTED JUNCTION BOX TO HOLLOW WALLS 105X105X50

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Install-Box KG	Red RAL 2012	24	8,50	0262-00
Install-Box KGS 850°C	Yellow RAL 1021	24	8,50	0262-0N

Work voltage 400V.
It has claws for mounting in empty walls.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007. Internal dimensions: 93x93x49 mm
Dimensions of the bottom: 105x105x50 mm




IP 40 650 °C 400 V PP



INSTALL BOX FLUSH MOUNTED JUNCTION BOX 89X89X50

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Install-Box	Red RAL 2012	36	5,40	0260-01

Work voltage 400 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Internal dimensions: 77x77x49 mm
Dimensions of the bottom: 89x89x50 mm




IP 40 650 °C 400 V PP



INSTALL BOX FLUSH MOUNTED JUNCTION BOX 95X95X50

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Install-Box	Red RAL 2012	30	7,20	0261-01

Work voltage 400V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Internal dimensions: 87x87x49 mm
Dimensions of the bottom: 98x98x50 mm




IP 40 650 °C 400 V PP



INSTALL BOX FLUSH MOUNTED JUNCTION BOX 105X105X50

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Install-Box	Red RAL 2012	24	8,40	0262-01

Work voltage 400V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Internal dimensions: 93x93x49 mm
Dimensions of the bottom: 105x105x50 mm




IP 40 650 °C 400 V PP



INSTALL BOX FLUSH MOUNTED JUNCTION BOX 130X100X70

Type	Color	Pack.	Weight	Index
Install-Box	Red RAL 2012	14 pc.	15,00 kg/100 pc.	0263-01

Work voltage 400 V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Internal dimensions: 128x89x68 mm
Dimensions of the bottom: 144x104x74 mm




IP 40 650 °C 400 V PP



INSTALL BOX FLUSH MOUNTED JUNCTION BOX 185X185X70

Type	Color	Pack.	Weight	Index
Install-Box	Red RAL 2012	5 pc.	28,00 kg/100 pc.	0264-01

Work voltage 400V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Internal dimensions: 170x170x68 mm
Dimensions of the bottom: 185x185x75 mm




IP 40 650 °C 400 V PP



INSTALL BOX FLUSH MOUNTED JUNCTION BOX 264X177X76

Type	Color	Pack.	Weight	Index
Install-Box	Red RAL 2012	5 pc.	35,00 kg/100 pc.	0265-01

Work voltage 400V.
NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
Internal dimensions: 249x162x68 mm
Dimensions of the bottom: 264x177x76 mm



IP 40 650 °C 400 V PS


NEW



INSTALL BOX FLUSH MOUNTED JUNCTION BOX 292X213X60

Type	Color	Pack.	Weight	Index
Install-Box	Red RAL 2012	1 pc.	36,20 kg/100 pc.	0267-01

Work voltage 400V.
NORM: PN-E-93208:1997
Dimensions of the bottom: 292x213x60 mm
Dimensions of the cover: 320x257 mm





IP 40 650 °C 400 V PP



JUNCTION BOX FOR LIGHTNING PROTECTION CONNECTOR

Type	Color	Pack.	Weight	Index
PZO	Red RAL 2012	5 pc.	32,20 kg/100 pc.	0266-00

Work voltage 400V. NORM: PN-E-93208:1997, PN-EN 60670-1:2007.
It protects the lightning protection connector against weather conditions.
The can has height adjustment. The junction box have „pins“ to facilitate the attachment of the box without dismantling the lightning protection connector.
The surface of the cover - matte.
Internal dimensions: 163x163x71 mm
Dimensions of the bottom: 185x185x80 mm
Reserved design in UP-RP

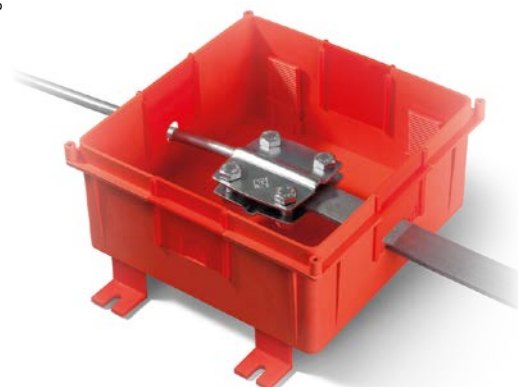


Junction boxes hermetic FAST BOX IP55 surface mounted

IP 55 650 °C 400 V PP

FAST-BOX JUNCTION BOX Ø 65X35 IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Fast-Box IP 55	White RAL 9003	20	4,30	0240-00
	Grey RAL 7035*	20	4,30	0240-04

Quick montage. NORM: PN-IEC-60998-1:2006. Number of inputs: 4 – glands.
Internal dimensions: 65x36 mm
Dimensions: Ø 75 x 40 mm




IP 55 650 °C 400 V PP

FAST-BOX JUNCTION BOX Ø 80X40 IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Fast-Box IP 55	White RAL 9003	20	5,10	0241-00
	Grey RAL 7035*	20	5,10	0241-04

Quick montage. NORM: PN-IEC-60998-1:2006. Number of inputs: 4 – glands.
Internal dimensions: 80x40 mm
Dimensions: Ø 90 x 44 mm




IP 55 650 °C 400 V PP

FAST-BOX JUNCTION BOX 70X70X40 IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Fast-Box IP 55	White RAL 9003	12	5,60	0245-00
	Grey RAL 7035*	12	5,60	0245-04

Quick montage. NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Internal dimensions: 67x67x41 mm
Dimensions: 78x78x44 mm




IP 55 650 °C 400 V PP

FAST-BOX JUNCTION BOX 80X80X42 IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Fast-Box IP 55	White RAL 9003	12	7,30	0242-00
	Grey RAL 7035*	12	7,30	0242-04

Quick montage. NORM: PN-IEC-60998-1:2006. Number of inputs: 4 – glands.
Internal dimensions: 80x80x42 mm
Dimensions: 90x90x50 mm




IP 55 650 °C 400 V PP

FAST-BOX JUNCTION BOX 76X76X40 IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Fast-Box IP 55	White RAL 9003	12	6,12	0242-10
	Grey RAL 7035*	12	6,12	0242-14

Quick montage. NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Internal dimensions: 76x76x40 mm
Dimensions: 87x87x45 mm




IP 55 650 °C 400 V PP

FAST-BOX JUNCTION BOX 110X110X52 IP 55


Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
Fast-Box IP 55	White RAL 9003	9	10,30	0243-00
	Grey RAL 7035*	9	10,30	0243-04

Quick montage. NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Internal dimensions: 100x100x42 mm
Dimensions: 110x110x50 mm



* - individual order


IP 55 650 °C 400 V PP



JUNCTION BOXES SURFACE MOUNTED HERMETIC PK-0 EP-LUX IP 55

Type	Color	Pack.	Weight	Index
PK-0	White RAL 9003	20	10,53	0224-00
	Grey RAL 7035*	20	10,53	0224-04

NORM: PN-IEC-60998-1:2006. Number of inputs: 4 – glands.
Internal dimensions: 89x89x41 mm
Dimensions: 92x92x50 mm




IP 55 650 °C 400 V PP



JUNCTION BOXES SURFACE MOUNTED HERMETIC PK-0 EP-LUX WITH REFILL 5X2,5MM² IP 55

Type	Color	Pack.	Weight	Index
PK-0	White RAL 9003	20	10,53	0223-00
	Grey RAL 7035*	20	10,53	0223-04

NORM: PN-IEC-60998-1:2006. Number of inputs: 4 – glands.
Internal dimensions: 89x89x41 mm
Dimensions: 92x92x50 mm




IP 55 650 °C 400 V PP



JUNCTION BOXES SURFACE MOUNTED HERMETIC PK-1 EP-LUX IP 55

Type	Color	Pack.	Weight	Index
PK-1	White RAL 9003	6	17,60	0250-00
	Grey RAL 7035*	6	17,60	0250-04

NORM: PN-IEC-60998-1:2006.
Internal dimensions: 125x125x21 mm
Dimensions: 135x135x62 mm




IP 55 650 °C 400 V PP



JUNCTION BOXES SURFACE MOUNTED HERMETIC PK-2 EP-LUX IP 55

Type	Color	Pack.	Weight	Index
PK-2	White RAL 9003	8	11,90	0222-00
	Grey RAL 7035*	8	11,90	0222-04

NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Internal dimensions: 95x95x49 mm
Dimensions: 108x108x58 mm




IP 55 650 °C 400 V PP



JUNCTION BOXES SURFACE MOUNTED HERMETIC PK-2 EP-LUX WITH REFILL 5X4MM² IP 55

Type	Color	Pack.	Weight	Index
PK-2	White RAL 9003	8	16,00	0221-00
	Grey RAL 7035*	8	16,00	0221-04

NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Internal dimensions: 95x95x49 mm
Dimensions: 108x108x58 mm with a refill 5x4 mm²




IP 55 650 °C 400 V PP



JUNCTION BOXES HERMETIC PK-3 EP-LUX IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
PK-3	White RAL 9003	9	13,80	0251-00
	Grey RAL 7035*	9	13,80	0251-04

NORM: PN-IEC-60998-1:2006.
Inside dimensions: 125x125x21 mm
Dimensions: 135x135x58 mm




IP 55 650 °C 400 V PP



JUNCTION BOXES HERMETIC PK-4 EP-LUX IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
PK-4	White RAL 9003	6	21,60	0233-00
	Grey RAL 7035*	6	21,60	0233-14

NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Inside dimensions: 125x125x42 mm
Dimensions: 133x133x64 mm




IP 55 650 °C 400 V PP



JUNCTION BOXES HERMETIC PK-4 EP-LUX WITH REFILL 5X10MM² IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
PK-4	White RAL 9003	6	31,00	0233-01
	Grey RAL 7035*	6	31,00	0233-14

NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Inside dimensions: 125x125x42 mm
Dimensions: 133x133x64 mm
With refill 5x10 mm²




IP 55 650 °C 400 V PP




JUNCTION BOXES HERMETIC PK-4 EP-LUX WITH REFILL 5X16MM² IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
PK-4	White RAL 9003	6	36,60	0233-02
	Grey RAL 7035*	6	36,60	0233-24

NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Inside dimensions: 125x125x42 mm
Dimensions: 133x133x64 mm
With refill 5x16 mm²




IP 55 650 °C 400 V PP



JUNCTION BOXES HERMETIC PK-5 EP-LUX IP 55

Type	Color	Pack.	Weight	Index
		pc.	kg/100 pc.	
PK-5	White RAL 9003	6	24,30	0252-00
	Grey RAL 7035*	6	24,30	0252-04

NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Inside dimensions: 125x125x42 mm
Dimensions: 133x133x83 mm






JUNCTION BOXES HERMETIC PK-6 EP-LUX IP 55

Type	Color	Pack.	Weight	Index
PK-6	White RAL 9003	6 pc.	22,56 kg/100 pc.	0227-00
	Grey RAL 7035*	6	22,56	0227-04



NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Inside dimensions: 108x147x86 mm
Dimensions: 158x118x94 mm



JUNCTION BOXES HERMETIC PK-6 EP-LUX 158X118X80 IP 55

Type	Color	Pack.	Weight	Index
PK-6	White RAL 9003	6 pc.	21,85 kg/100 pc.	0227-10
	Grey RAL 7035*	6	21,85	0227-14



NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Inside dimensions: 108x147x86 mm
Dimensions: 157x118x94 mm



JUNCTION BOXES HERMETIC PK-6 EP-LUX WITH REFILL 4X16 MM² IP 55

Type	Color	Pack.	Weight	Index
PK-6	White RAL 9003	6 pc.	36,20 kg/100 pc.	0228-00
	Grey RAL 7035*	6	36,20	0228-04


NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Inside dimensions: 108x147x86 mm
Dimensions: 157x118x94 mm
With refill 4x16 mm²



JUNCTION BOXES HERMETIC PK-6 EP-LUX 158X118X80 WITH REFILL 4X16 MM² SHORT IP 55

Type	Color	Pack.	Weight	Index
PK-6	White RAL 9003	6 pc.	32,90 kg/100 pc.	0228-10
	Grey RAL 7035*	6	32,90	0228-14


NORM: PN-IEC-60998-1:2006. Number of inputs: 6 – glands.
Internal dimensions: 108x147x86 mm
Dimensions: 157x118x80 mm
With refill 4x16 mm²



JUNCTION BOXES HERMETIC PK-7 EP-LUX IP 55


Type	Color	Pack.	Weight	Index
PK-7	White RAL 9003	3 pc.	28,00 kg/100 pc.	0238-01
	Grey RAL 7035*	3	28,00	0238-14

NORM: PN-IEC-60998-1:2006. Number of inputs: 8 – glands.
Inside dimensions: 163x163x55 mm
Dimensions: 172x172x75 mm



Junction boxes hermetic EP LUX type PK surface mounted


IP 55 650 °C 400 V PP




JUNCTION BOXES HERMETIC PK-8 EP-LUX IP 55

Type	Color	Pack.	Weight	Index
PK-8	White RAL 9003	1 pc.	39,35 kg/100 pc.	0231-00
	Grey RAL 7035*	1	39,35	0231-04

NORM: PN-IEC-60998-1:2006.
Number of inputs: 8-glands
Inside dimensions: 188x188x53 mm
Dimensions: 196x196x78 mm




IP 55 650 °C 400 V PP



JUNCTION BOXES HERMETIC PK-8 EP-LUX WITH REFILL 5X35 MM² IP 55

Type	Color	Pack.	Weight	Index
PK-8	White RAL 9003	1 pc.	70,16 kg/100 pc.	0232-00
	Grey RAL 7035*	1	70,16	0232-04

NORM: PN-IEC-60998-1:2006.
Number of inputs: 8-glands
With refill 5x35 mm²
Inside dimensions: 188x188x53 mm
Dimensions: 196x196x78 mm




IP 55 650 °C 400 V ABS



JUNCTION BOXES HERMETIC PK-9 EP-LUX WITH GLANDS IP 55

Type	Color	Pack.	Weight	Index
PK-9	Grey RAL 7035*	1 pc.	77,00 kg/100 pc.	0253-00
	Grey RAL 7035*	1	77,00	0253-00

NORM: PN-IEC-60998-1:2006.
Number of inputs: 8-glands
Inside dimensions: 287x200x112 mm
Dimensions: 303x214x123 mm




IP 55 650 °C 400 V ABS




JUNCTION BOXES HERMETIC PK-9 EP-LUX WITHOUT GLANDS IP 55

Type	Color	Pack.	Weight	Index
PK-9	Grey RAL 7035*	1 pc.	80,00 kg/100 pc.	0253-30
	Grey RAL 7035*	1	80,00	0253-30

NORM: PN-IEC-60998-1:2006.
Inside dimensions: 287x200x112 mm
Dimensions: 303x214x123 mm




IP 55 650 °C 400 V PP



JUNCTION BOXES HERMETIC EP-LUX 100X100X52 IP 55

Type	Color	Pack.	Weight	Index
IP55	White RAL 9003	15 pc.	13,52 kg/100 pc.	0243-10
	White RAL 9003	15	13,52	0243-10

NORM: PN-IEC-60998-1:2006.
Inside dimensions: 100x100x52 mm
Dimensions: 110x110x67 mm




IP 55 650 °C 400 V PP



JUNCTION BOXES HERMETIC EP-LUX 110X80X40 IP 55

Type	Color	Pack.	Weight	Index
IP 55	White RAL 9003	20 pc.	15,50 kg/100 pc.	0244-00
	White RAL 9003	20	15,50	0244-00

NORM: PN-IEC-60998-1:2006.
Inside dimensions: 110x80x40 mm
Dimensions: 118x87x55 mm




Junction boxes hermetic 2K (2 components) surface mounted



JUNCTION BOX HERMETIC 2K 98X98X46 IP55/IP65 (EMPTY)

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
Spur 2K	White RAL 9003	8	8,80	0290-00
	Grey RAL 7035	8	8,80	0290-04
	Brown RAL 8028	8	8,80	0290-06



NORM: DIN EN 60670-22 IEC 60670-22
With external mounting brackets., membrane Ø20
Internal dimensions: 88x88x38 mm Dimensions: 98x98x46 mm



JUNCTION BOX HERMETIC 2K 98X98X46 5X2,5MM² IP55/IP65 (WITH TERMINALS)

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
Spur 2K	White RAL 9003	8	8,95	0290-01
	Grey RAL 7035	8	8,95	0290-41
	Brown RAL 8028	8	8,95	0290-61


NORM: DIN EN 60670-22 IEC 60670-22
With external mounting brackets., membrane Ø20
Terminals 5x2,5mm² Internal dimensions: 88x88x38 mm
Dimensions: 98x98x46 mm




JUNCTION BOX HERMETIC 2K 98X98X46 5X2,5 - MM², 4xPG 13,5MM IP55/IP65 (TERMINALS+THREADED GLANDS)

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
4xPG 13,5 mm IP68	Grey RAL 7035	8	8,80	0290-80
4xPG 13,5 mm IP68 / 5x2,5 mm	Grey RAL 7035	8	8,80	0290-81

NORM: DIN EN 60670-22 IEC 60670-22
With external mounting brackets., membrane Ø20
Terminals 5x2,5mm², glands PG 13,5mm IP68
Internal dimensions: 88x88x38 mm
Dimensions: 98x98x46 mm



coloured terminals 2,5 mm² for easy assembly

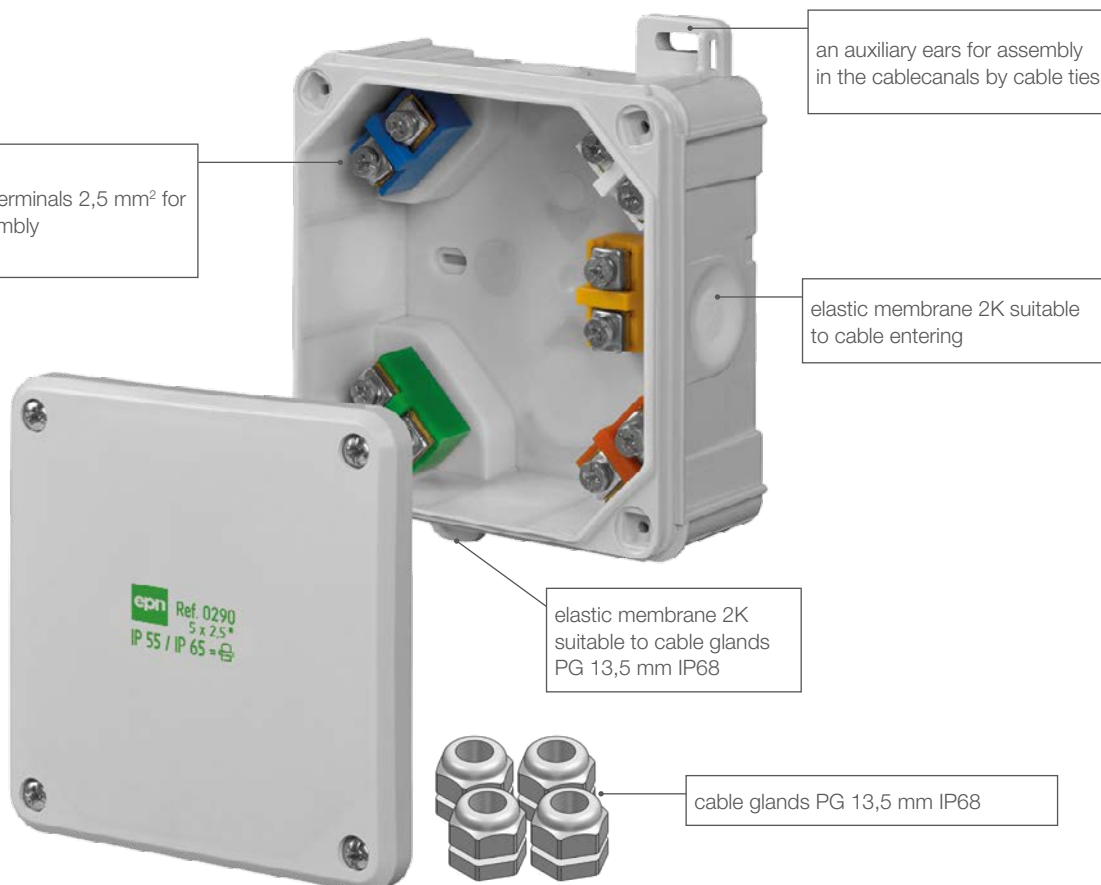

an auxiliary ears for assembly in the cablecanals by cable ties

elastic membrane 2K suitable to cable entering

elastic membrane 2K suitable to cable glands PG 13,5 mm IP68

cable glands PG 13,5 mm IP68

Junction boxes hermetic serie E surface mounted


IP 55 IK 07 400 V



E10 JUNCTION BOX HERMETIC N/T 45X90 IP55

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
E10	Grey RAL 7035*	8	2,0	0295-00

Junction box connected with 10 grooves for installation in cable ducts
NORM: DIN EN 60670
Dimensions: 45x90x39 mm




IP 55 IK 07 400 V



E7 JUNCTION BOX HERMETIC N/T 75X75 IP55

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
E7	Grey RAL 7035*	8	4,0	0296-00

Junction box connected with 6 grooves for installation in cable ducts
NORM: DIN EN 60670
Dimensions: 75x75x39 mm




IP 55 IK 07 400 V



E12 JUNCTION BOX HERMETIC N/T 85X85 IP55

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
E12	Grey RAL 7035*	8	4,5	0297-00

Junction box connected with 12 grooves for installation in cable ducts
NORM: DIN EN 60670
Dimensions: 85x85x39 mm



E12 Junction box connected
85x85x39 IP55
12 grooves
0297-00


IP 41 650 °C 250 V PS



JUNCTION BOX IP 41 60X60X30

Type	Color	Pack.	Weight	Index
IP 41	White RAL 9003	30	2,60	0236-00
	Black RAL 9005*			0236-02

NORM: PN-IEC-60998-1:2006.
Junction box for ICT.
Internal dimensions: 55x55x25 mm
Dimensions: 60x60x30 mm




IP 20 650 °C 400 V PP




JUNCTION BOXES SURFACE MOUNTED EP-LUX WITH REFILL 5X2.5 MM² IP 20

Type	Color	Pack.	Weight	Index
EP LUX IP 20	White RAL 9003	20	6,20	0225-00

NORM: PN-IEC-60998-1:2006.
Internal dimensions: 85x74x13 mm
Dimensions: 89x79x25 mm




IP 41 650 °C 400 V PP



JUNCTION BOX HERMETIC N/T EMPTY P0 IP 41

Type	Color	Pack.	Weight	Index
P0	White RAL 9003	20	5,00	0211-00

NORM: PN-IEC-60998-1:2006.
Internal dimensions: 73x25 mm
Dimensions: Ø 73x depth 28 mm




IP 41 650 °C 400 V PP



JUNCTION BOX HERMETIC N/T WITH REFILL 4X2,5 MM² IP41

Type	Color	Pack.	Weight	Index
P5	White RAL 9003	20	6,80	0212-00

NORM: PN-IEC-60998-1:2006.
Internal dimensions: 65x29 mm
Dimensions: Ø 73x depth 28 mm




IP 42 650 °C 400 V PP



JUNCTION BOX HERMETIC N/T EMPTY IP 42

Type	Color	Pack.	Weight	Index
380	White RAL 9003	20	5,50	0214-00

NORM: PN-IEC-60998-1:2006.
Internal dimensions: 67x67x30 mm
Dimensions: 86x86x35 mm




IP 42 650 °C 400 V PP



JUNCTION BOX HERMETIC N/T WITH REFILL 4X2,5 MM² IP 42


Type	Color	Pack.	Weight	Index
380	White RAL 9003	20	7,20	0213-00

NORM: PN-IEC-60998-1:2006.
Internal dimensions: 67x67x30 mm
Dimensions: 86x86x35 mm



Junction boxes surface mounted


IP 55 650 °C 400 V PP



JUNCTION BOX 6-WAYS SURFACE MOUNTED EP LUX 5X2.5 MM² EMPTY IP 55

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
EP-LUX IP55	White RAL 9003	20	6,90	0226-00

NORM: PN-IEC-60998-1:2006.
Internal dimensions: 78x78x32 mm
Dimensions: 86x86x39 mm




IP 55 650 °C 400 V PP




JUNCTION BOX 6-WAYS SURFACE MOUNTED EP LUX 5X2.5 MM² EMPTY IP 55

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
EP-LUX IP55	Black RAL 9005*	20	6,90	0226-02
	Brown RAL 8028*			0226-60
	Grey RAL 7035*			0226-04

NORM: PN-IEC-60998-1:2006.
Internal dimensions: 78x78x32 mm
Dimensions: 86x86x39 mm




IP 55 650 °C 400 V PP



JUNCTION BOX 6-WAYS SURFACE MOUNTED EP LUX 5X2.5 MM² WITH REFILL IP 55

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
EP-LUX IP55	White RAL 9003	20	9,10	0226-01
	Grey RAL 7035*			0226-05

NORM: PN-IEC-60998-1:2006.
Internal dimensions: 78x78x32 mm
Dimensions: 86x86x39 mm




IP 55 650 °C 400 V PP



JUNCTION BOX 6-WAYS N/T MZ EP-LUX 5X2.5 MM² EMPTY IP 55

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
EP-LUX IP55	White RAL 9003	20	6,90	0226-10

NORM: PN-IEC-60998-1:2006.
With external mounting brackets..
Internal dimensions: 78x78x32 mm
Dimensions: 86x86x39 mm




IP 55 650 °C 400 V PP



JUNCTION BOX 6-WAYS N/T MZ EP-LUX 5X2.5 MM² WITH REFILL IP 55

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
EP-LUX IP55	White RAL 9003	20	9,10	0226-11
	Grey RAL 7035*	20	9,10	0226-41

NORM: PN-IEC-60998-1:2006.
With external mounting brackets..
Internal dimensions: 78x78x32 mm
Dimensions: 86x86x39 mm




IP 55 650 °C 400 V PP



JUNCTION BOX 6-WAYS N/T MZ EP-LUX 5X2.5 MM² WITH REFILL IP 55

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
EP-LUX IP55	brązowy RAL 8028	20	9,10	0226-61

NORM: PN-IEC-60998-1:2006.
With external mounting brackets..
Internal dimensions: 78x78x32 mm
Dimensions: 86x86x39 mm






CARBO-BOX CASING 158X118X80 IP55

Type	Color	Pack.	Weight	Index
CARBO-BOX IP55	Grey RAL 7035*	1 pc.	26,00 kg/100 pc.	0229-00


NORM: PN-IEC-60998-1:2006.
Internal dimensions: 109x149x54 mm
Dimensions: 157x118x94 mm



CARBO-BOX CASING 158X118X80 IP55 WITH RAIL

Type	Color	Pack.	Weight	Index
CARBO-BOX IP55	Grey RAL 7035*	1 pc.	30,00 kg/100 pc.	0230-00



NORM: PN-IEC-60998-1:2006.
Rail TH 35
Internal dimensions: 109x149x54 mm
Dimensions: 118x157x94 mm



CARBO-BOX CASING 303X213X125 IP55

Type	Color	Pack.	Weight	Index
CARBO-BOX IP55	Grey RAL 7035*	1 pc.	80,00 kg/100 pc.	0253-20


NORM: PN-IEC-60998-1:2006.
Dimensions: 303x214x123 mm



CARBO-BOX CASING 303X213X125 IP55 WITH RAIL

Type	Color	Pack.	Weight	Index
CARBO-BOX IP55	Grey RAL 7035*	1 pc.	80,00 kg/100 pc.	0253-10

NORM: PN-IEC-60998-1:2006.
Rail TH 35
Internal dimensions: 109x149x54 mm
Dimensions: 303x214x123 mm



Hermetic junction boxes

INDUSTRIAL IP65



Cover transparent
index with: X X X X- **01**



Cover color the same as casing
Grey RAL 7035 index with X X X X -**00**



With cable glands
cover Grey RAL 7035* index : X X X X- **02**




- Protection degree IP65
- Impact resistance IK07
- Sealing possibility casings
- Color obudowy Grey RAL 7035*
- Increased UV resistance
- Metal screws
- Elastic sealing

- CAD drawing available at [www](http://www.elektro-plast.pl)
- Sealed casing
- HALOGENFREE
- Available at many sizes

DIMENSIONS

Boxes hermetic INDUSTRIAL IP65



105 x 105

dimension A/B/C	index
105x105x66	2701-00
105x105x140	2702-00
105x105x66	2701-01

-00 casing grey RAL7035
-01 casing transparent



110 x 75

dimension A/B/C	index
110x75x59	2703-00
110x75x90	2704-00
110x75x59	2703-01

-00 casing grey RAL7035
-01 casing transparent



135 x 74

dimension A/B/C	index
135x74x72	2705-00
135x74x105	2706-00
135x74x72	2705-01

-00 casing grey RAL7035
-01 casing transparent



270 x 220

dimension A/B/C	index
270x220x106	2719-00
270x220x126	2720-00
270x220x168	2721-00
270x220x106	2719-01
270x220x126	2720-01
270x220x168	2721-01

-00 casing grey RAL7035
-01 casing transparent



280 x 220

dimension A/B/C	index
280x220x127	2722-00

-00 casing grey RAL7035




313 x 253

dimension A/B/C	index
313x253x115	2723-00
313x253x165	2724-00
313x253x115	2723-01
313x253x165	2724-01

-00 casing grey RAL7035
-01 casing transparent

DIMENSIONS

Boxes hermetic INDUSTRIAL IP65



170 x 105

dimension A/B/C	index
170x105x82	2707-00
170x105x112	2708-00
170x105x82	2707-01

-00 casing grey RAL7035
-01 casing transparent



170 x 135

dimension A/B/C	index
170 x 135x147	2709-00
170x135x241	2710-00
170x135x85	2711-00
170x135x107	2712-00
170x135x145	2713-00
170x135x176	2714-00

170x135x241	2710-01
170x135x85	2711-01
170x135x107	2712-01

-00 casing grey RAL7035
-01 casing transparent



220 x 170

dimension A/B/C	index
220x170x86	2716-00
220x170x107	2717-00
220x170x146	2718-00
220x170x86	2716-01
220x170x107	2717-01
220x170x146	2718-01

-00 casing grey RAL7035
-01 casing transparent



340 x 270

dimension A/B/C	index
340x270x106	2725-00
340x270x165	2726-00
340x270x106	2725-01
340x270x165	2726-01

-00 casing grey RAL7035
-01 casing transparent




440 x 330

dimension A/B/C	index
440x330x145	2727-00
440x330x145	2727-01

-00 casing grey RAL7035
-01 casing transparent

DIMENSIONS

Boxes hermetic INDUSTRIAL IP65



180x330

dimension A/B/C	index
180x330x130	2749-00



330x330

dimension A/B/C	index
330x330x130	2750-00



506x330

dimension A/B/C	index
506x330x13	2751-00



506x230

dimension A/B/C	index
130x95x58	2752-00

BOXES HERMETIC

- industrial quality
- hermetic IP65
- application in automation

CE

PRODUKT
POLSKI

IP65

2K

DIMENSIONS

Boxes hermetic INDUSTRIAL IP65 with cable glands



102 x 102

dimension A/B/C	index
102x102x47	2700-02

-02 Grey RAL 7035*



129 x 129

dimension A/B/C	index
129x129x61	2701-02

-02 Grey RAL 7035*



130 x 95

dimension A/B/C	index
130x95x58	2703-02

-02 Grey RAL 7035*



156 x 95

dimension A/B/C	index
156x95x68	2705-02

-02 Grey RAL 7035*



198 x 95

dimension A/B/C	index
198x139x82	2707-02

-02 Grey RAL 7035*



198 x 163

dimension A/B/C	index
198x163x80	2711-02

-02 Grey RAL 7035*



249 x 198

dimension A/B/C	index
249x198x81	2716-02

-02 Grey RAL 7035*



305 x 244

dimension A/B/C	index
305x244x126	2721-02
305x244x168	2722-02

-02 Grey RAL 7035*



342 x 282

dimension A/B/C	index
342x282x115	2723-02
342x282x165	2724-02

-02 Grey RAL 7035*


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 105X105X66 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	0,26	2701-00

NORM PN-EN-60670-1
Inside dimensions: 99x99x56
Outside dimensions: 105x105x66

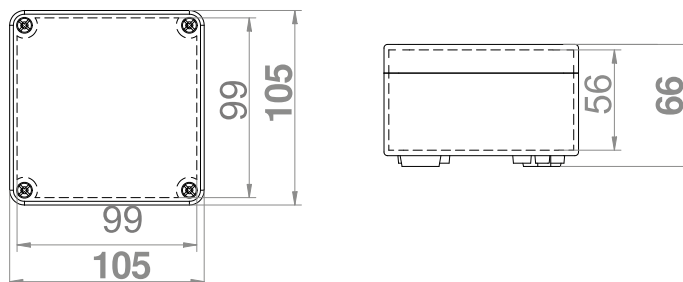


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 105X105X140 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	0,25	2702-00

NORM PN-EN-60670-1
Inside dimensions: 99x99x131
Outside dimensions: 105x105x140

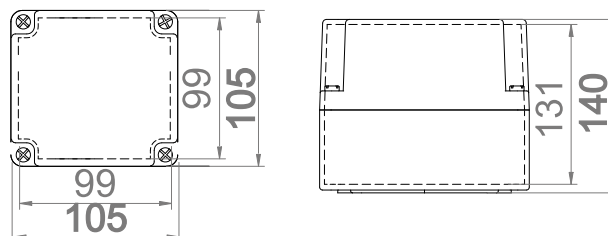


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 110X75X59 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	0,15	2703-00

NORM PN-EN-60670-1
Inside dimensions: 105x70x46
Outside dimensions: 110x75x59

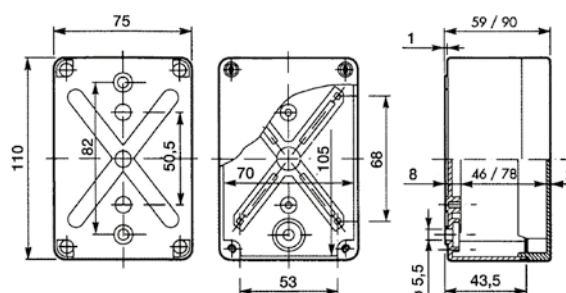




INDUSTRIAL JUNCTION BOX N/T 110X75X90 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,24	2704-00


NORM PN-EN-60670-1
Inside dimensions: 105x70x78
Outside dimensions: 110x75x90

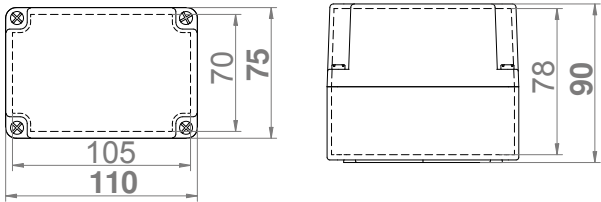

INDUSTRIAL JUNCTION BOX N/T 135X74X72 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,22	2705-00


NORM PN-EN-60670-1
Inside dimensions: 130x69x57
Outside dimensions: 135x74x72

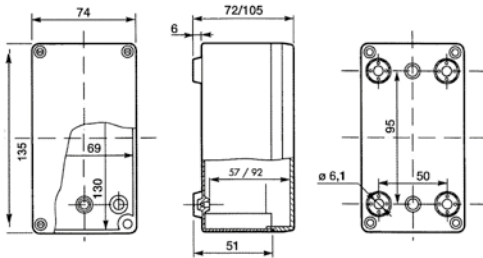

INDUSTRIAL JUNCTION BOX N/T 135X74X105 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,22	2706-00

NORM PN-EN-60670-1
Inside dimensions: 130x69x92
Outside dimensions: 135x74x105

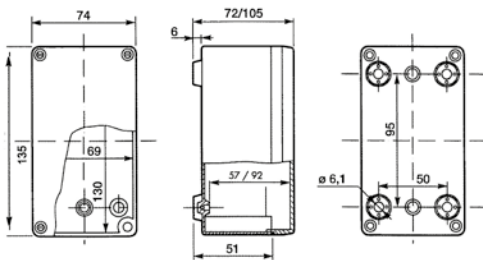


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 170X105X82 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	0,46	2707-00

NORM PN-EN-60670-1
Inside dimensions: 164x99x67
Outside dimensions: 170x105x82

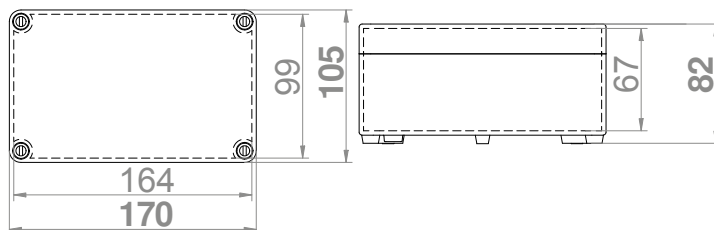


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 170X105X112 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	0,61	2708-00

NORM PN-EN-60670-1
Inside dimensions: 164x99x97
Outside dimensions: 170x105x112

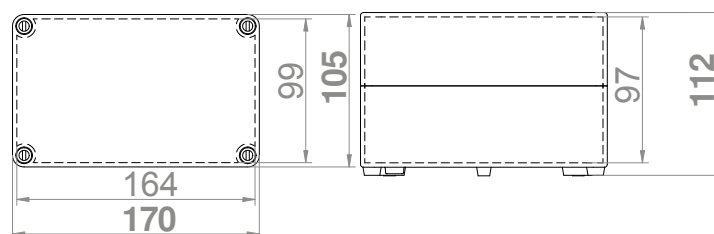


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 170X135X147 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	0,60	2709-00

NORM PN-EN-60670-1
Inside dimensions: 164x129x132
Outside dimensions: 170x135x147

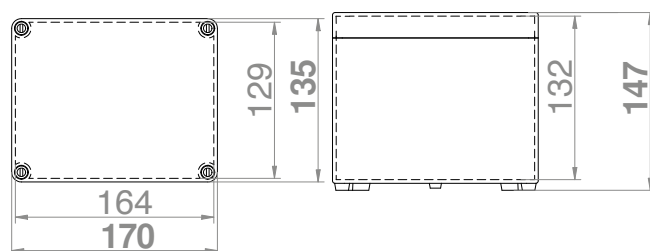


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 170X135X241 IP65

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,63	2710-00

NORM PN-EN-60670-1
Inside dimensions: 164x129x225
Outside dimensions: 170x135x241

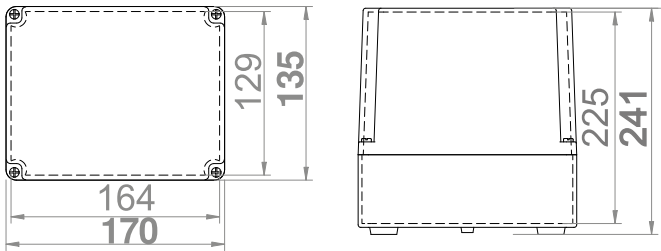


IP 65 IK 07 400 V Br Cl 2K



INDUSTRIAL JUNCTION BOX N/T 170X135X85 IP65

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,49	2711-00

NORM PN-EN-60670-1
It is possible to make the cover sealing on request by the 2-component method.
Inside dimensions: 164x129x70
Outside dimensions: 170x135x85

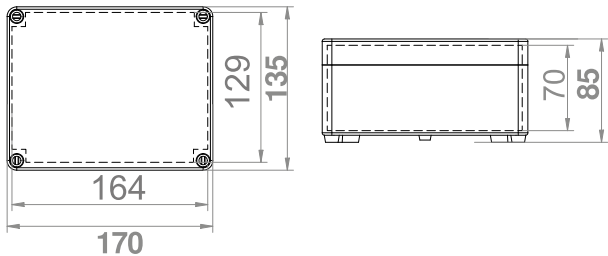


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 170X135X107 IP65

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,50	2712-00

NORM PN-EN-60670-1
Inside dimensions: 164x129x91
Outside dimensions: 170x135x107

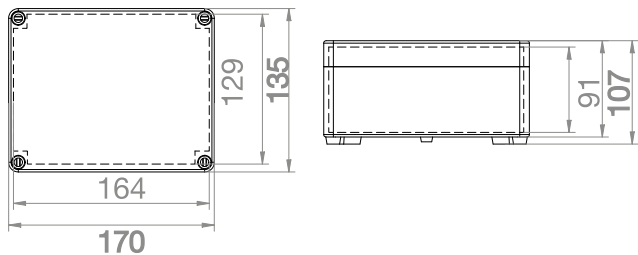


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 170X135X145 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	0,69	2713-00

NORM PN-EN-60670-1
Inside dimensions: 164x129x130
Outside dimensions: 170x135x145

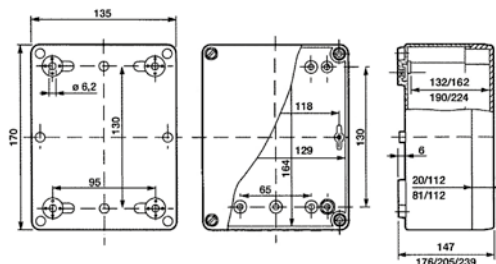


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 170X135X176 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	0,46	2714-00

NORM PN-EN-60670-1
Inside dimensions: 164x129x162
Outside dimensions: 170x135x176

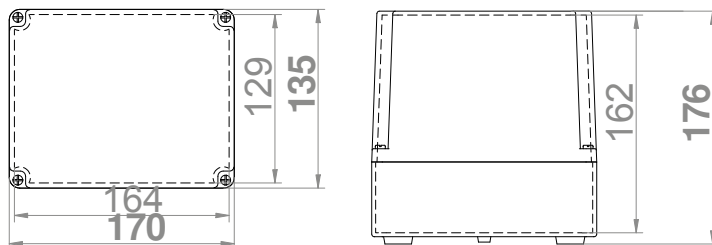


IP 65 IK 07 400 V Br Cl 2K



INDUSTRIAL JUNCTION BOX N/T 220X170X107 HINGED IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	-	2717-03

NORM PN-EN-60670-1
Inside dimensions: 214x162x102 mm
Outside dimensions: 220x170x120 mm

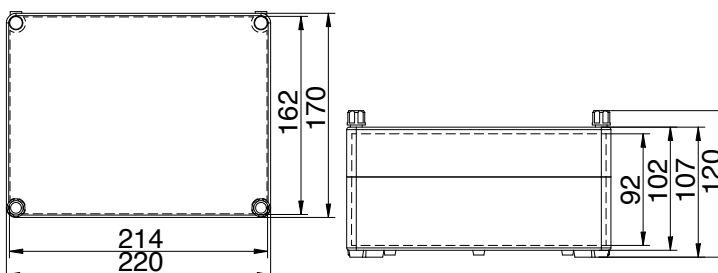




INDUSTRIAL JUNCTION BOX N/T 220X170X86 IP65

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,75	2716-00


NORM PN-EN-60670-1
Inside dimensions: 214x164x69
Outside dimensions: 220x170x86

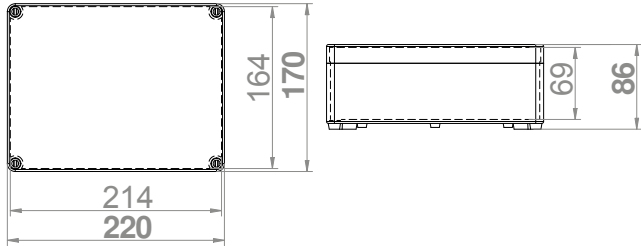

INDUSTRIAL JUNCTION BOX N/T 220X170X107 IP65

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,86	2717-00


NORM PN-EN-60670-1
It is possible to make the cover sealing on request by the 2-component method.
Inside dimensions: 214x164x91
Outside dimensions: 220x170x107

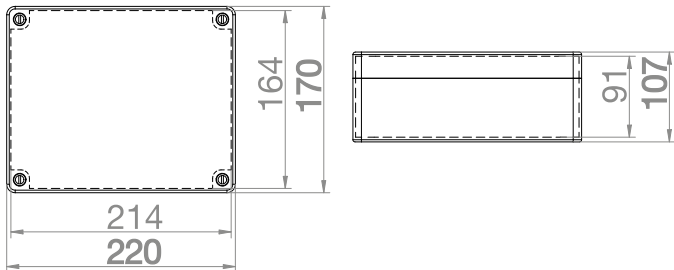


INDUSTRIAL JUNCTION BOX N/T 220X170X146 IP65

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	1,00	2718-00

NORM PN-EN-60670-1
Inside dimensions: 214x162x130
Outside dimensions: 220x170x146

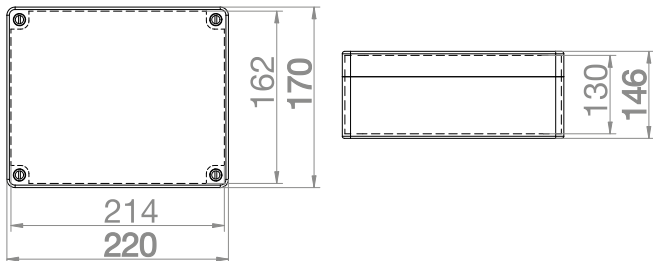

IP 65 IK 07 400 V Br Cl




sealing

INDUSTRIAL JUNCTION BOX N/T 270X220X106 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	1,31	2719-00

NORM PN-EN-60670-1
Machine sealing.
Inside dimensions: 264x214x89
Outside dimensions: 270x220x106

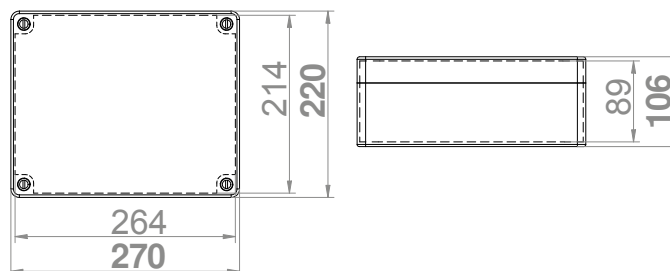

IP 65 IK 07 400 V Br Cl




sealing

INDUSTRIAL JUNCTION BOX N/T 270X220X126 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	1,35	2720-00

NORM PN-EN-60670-1
Machine sealing.
Inside dimensions: 264x214x109
Outside dimensions: 270x220x126

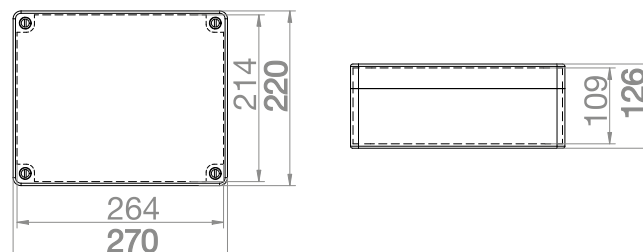

IP 65 IK 07 400 V Br Cl




sealing

INDUSTRIAL JUNCTION BOX N/T 270X220X168 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	1,49	2721-00

NORM PN-EN-60670-1
Machine sealing.
Inside dimensions: 264x214x151
Outside dimensions: 270x220x168

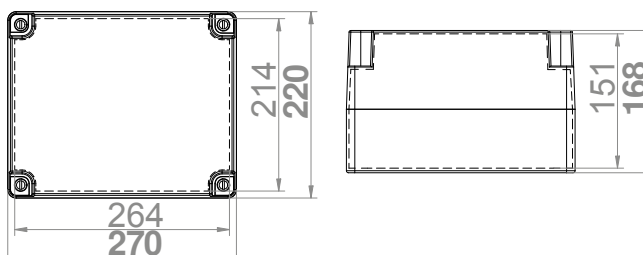




INDUSTRIAL JUNCTION BOX N/T 280X220X174 IP65

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	1,30	2722-00


NORM PN-EN-60670-1
Machine sealing.
Inside dimensions: 267x207x110
Outside dimensions: 280x220x174

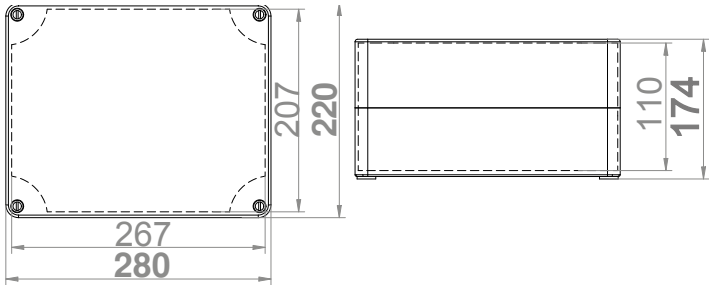

INDUSTRIAL JUNCTION BOX N/T 313X253X115 IP65

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	1,64	2723-00


NORM PN-EN-60670-1
Machine sealing.
Inside dimensions: 300x240x100
Outside dimensions: 313x253x115

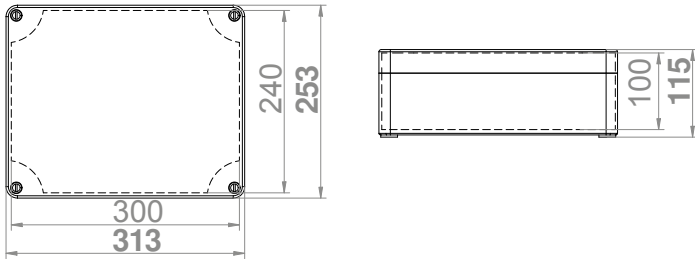


INDUSTRIAL JUNCTION BOX N/T 313X253X165 IP65

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	2,30	2724-00

NORM PN-EN-60670-1
Machine sealing.
Inside dimensions: 300x240x150
Outside dimensions: 313x253x165

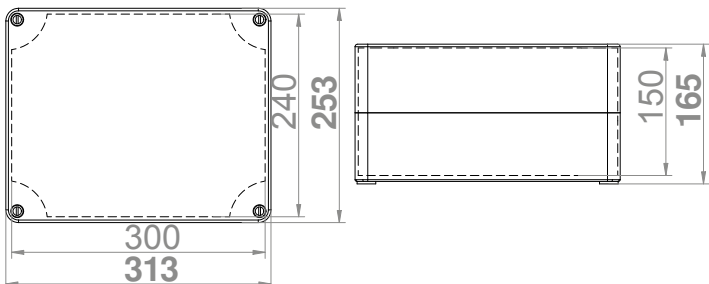


IP 65 IK 07 400 V Br Cl 2K




INDUSTRIAL JUNCTION BOX N/T 340X270X106 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	2,00	2725-00

NORM PN-EN-60670-1
Machine sealing.
Inside dimensions: 328x258x91
Outside dimensions: 340x270x106

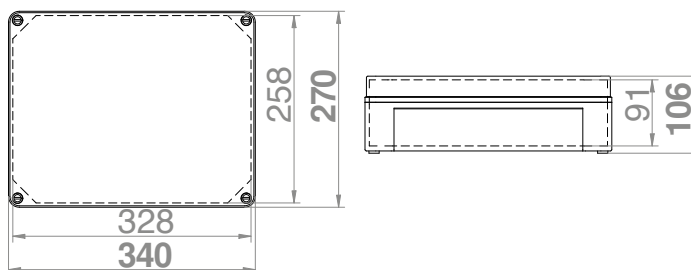


IP 65 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 340X270X165 IP65

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	2,50	2726-00

NORM PN-EN-60670-1
Machine sealing.
Inside dimensions: 328x258x154
Outside dimensions: 340x270x165

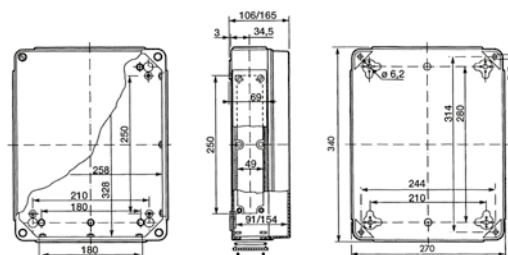


IP 65 650 °C Br Cl 400 V ABS



INDUSTRIAL JUNCTION BOX N/T 180X330X130 IP65

Type	Color	Pack.	Waga	Index
IP65 enclosure	Grey RAL 7035	1 pc.	1,06 kg/1 szt.	2749-00

NORM: PN-IEC-60998-1:2006.
Dimensions: 188x330x130 mm




IP 65 650 °C Br Cl 400 V ABS



INDUSTRIAL JUNCTION BOX N/T 330X330X130 IP65

Type	Color	Pack.	Weight	Index
IP65 enclosure	Grey RAL 7035	1 pc.	1,56 kg/1pc.	2750-00

NORM: PN-IEC-60998-1:2006.
Dimensions: 330x330x130 mm




IP 65 650 °C Br Cl 400 V ABS



INDUSTRIAL JUNCTION BOX N/T 514X330X130 IP65

Type	Color	Pack.	Waga	Index
IP65 enclosure	Grey RAL 7035	1 pc.	2,18 kg/1 szt.	2751-00

NORM: PN-IEC-60998-1:2006.
Dimensions: 514x330x130 mm




IP 65 650 °C Br Cl 400 V ABS



INDUSTRIAL JUNCTION BOX N/T 506X230X130 IP65

Type	Color	Pack.	Waga	Index
IP65 enclosure	Grey RAL 7035	1 pc.	1,85 kg/1 szt.	2752-00

NORM: PN-IEC-60998-1:2006.
Dimensions: 506x230x130 mm

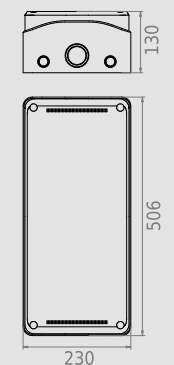


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 105X105X66 IP65 PC

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,25	2701-01

NORM PN-EN-60670-1
Inside dimensions: 99x99x56
Outside dimensions: 105x105x66

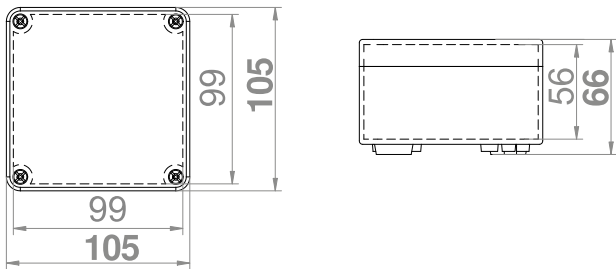


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 110X75X59 IP65 PC

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,22	2703-01

NORM PN-EN-60670-1
Inside dimensions: 105x70x46
Outside dimensions: 110x75x59

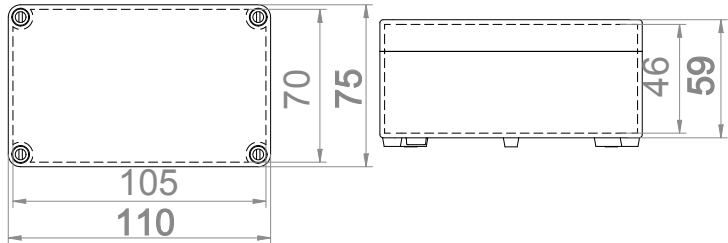


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 135X74X72 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc. 1	kg/1pc. 0,34	2705-01

NORM PN-EN-60670-1
Inside dimensions: 130x69x57
Outside dimensions: 135x74x72

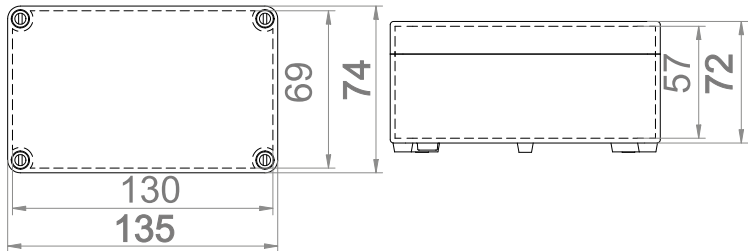


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 170X105X82 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc. 1	kg/1pc. 0,37	2707-01

NORM PN-EN-60670-1
Inside dimensions: 164x99x67
Outside dimensions: 170x105x82

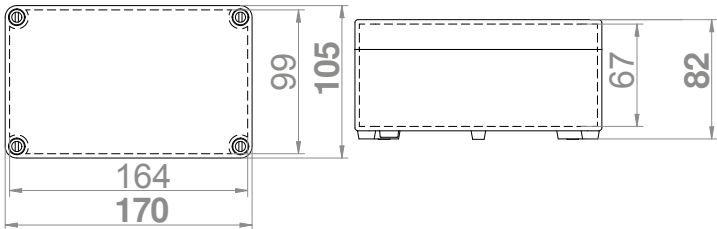


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 170X135X85 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,40	2711-01

NORM PN-EN-60670-1
Inside dimensions: 164x129x70
Outside dimensions: 170x135x85

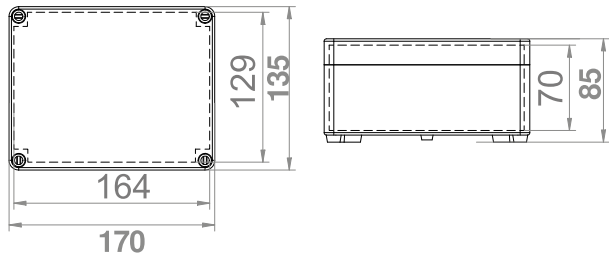


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 170X135X107 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,56	2712-01

NORM PN-EN-60670-1
Inside dimensions: 164x129x91
Outside dimensions: 170x135x107

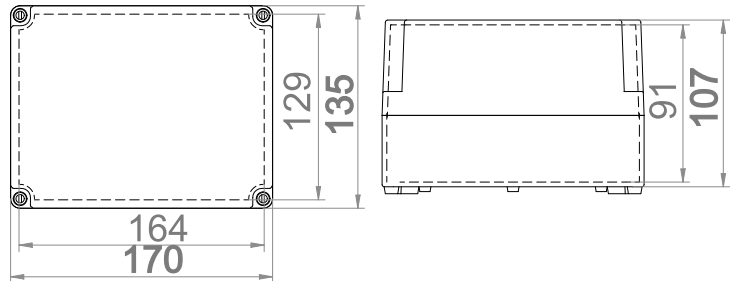


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 220X170X86 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	0,65	2716-01

NORM PN-EN-60670-1
Inside dimensions: 214x164x69
Outside dimensions: 220x170x86

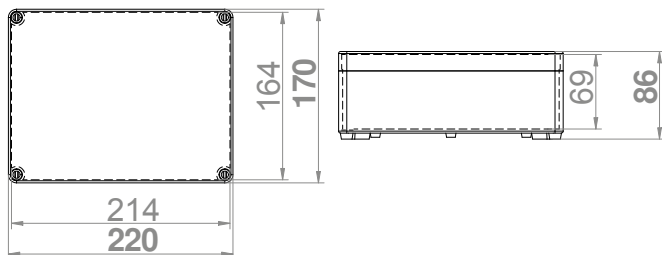


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 220X170X107 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc. 1	kg/1pc. 0,80	2717-01

NORM PN-EN-60670-1
Inside dimensions: 214x162x91
Outside dimensions: 220x170x107

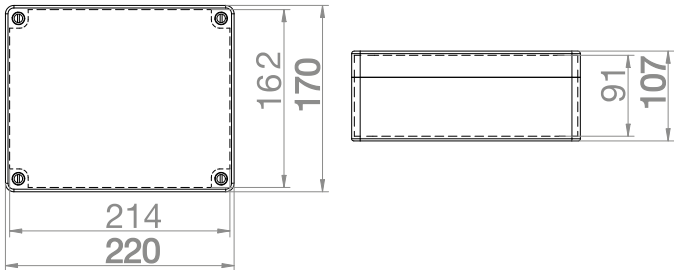


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 220X170X146 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc. 1	kg/1pc. 0,85	2718-01

NORM PN-EN-60670-1
Inside dimensions: 214x162x130
Outside dimensions: 220x170x146

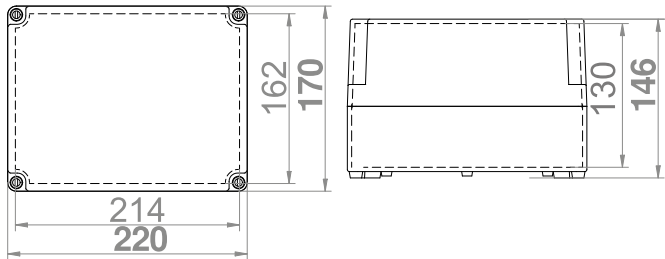


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 270X220X106 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc. 1	kg/1pc. 1,00	2719-01

NORM PN-EN-60670-1
Inside dimensions: 264x214x89
Outside dimensions: 270x220x106

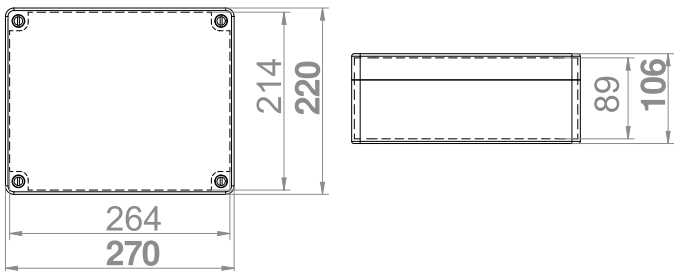


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 270X220X126 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	1,20	2720-01

NORM PN-EN-60670-1
Inside dimensions: 264x214x109
Outside dimensions: 270x220x126

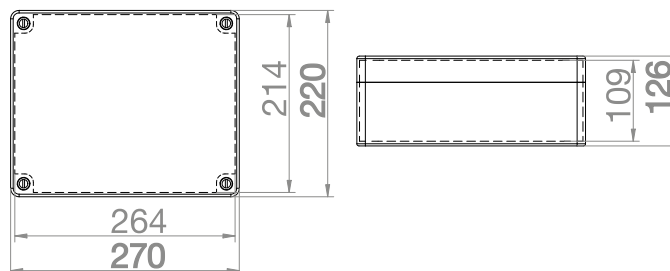


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 270X220X168 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	1,49	2721-01

NORM PN-EN-60670-1
Inside dimensions: 264x214x151
Outside dimensions: 270x220x168

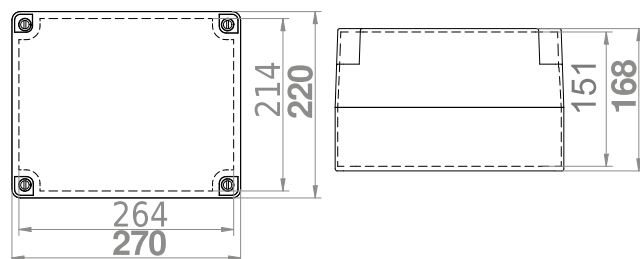


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 313X253X115 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	1,25	2723-01

NORM PN-EN-60670-1
Inside dimensions: 300x240x100
Outside dimensions: 313x253x115

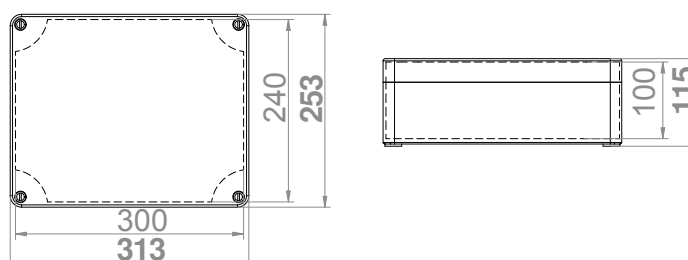


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 313X253X165 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	1,85	2724-01

NORM PN-EN-60670-1
Inside dimensions: 300x240x150
Outside dimensions: 313x253x165

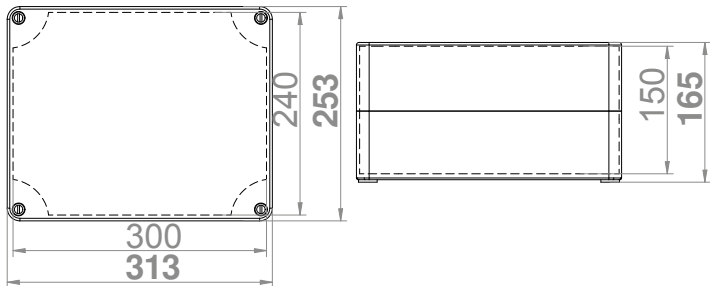


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 340X270X106 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	1,45	2725-01

NORM PN-EN-60670-1
Inside dimensions: 328x258x91
Outside dimensions: 340x270x106

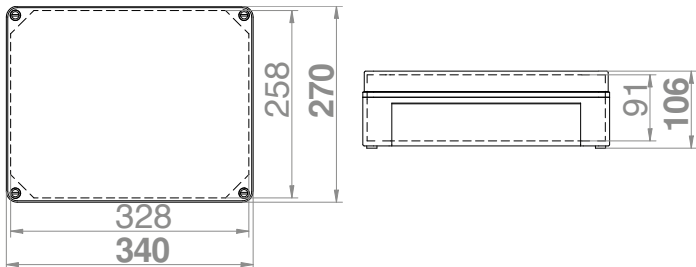


IP 65 IK 07 400 V PC



INDUSTRIAL JUNCTION BOX N/T 340X270X165 IP65 PC

Type	Color	Pack.	Weight	Index
Industrial IP65	Grey RAL 7035	pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	-	2726-01

NORM PN-EN-60670-1
Inside dimensions: 328x258x151
Outside dimensions: 340x270x165

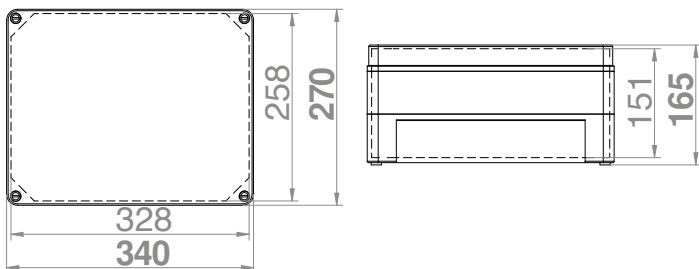

IP
65

IK
07

400
V


PC



INDUSTRIAL JUNCTION BOX N/T 440X330X145 IP65 PC

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP65	Grey RAL 7035	1	3,20	2727-01

NORM PN-EN-60670-1
Inside dimensions: 429x321x127
Outside dimensions: 440x330x145

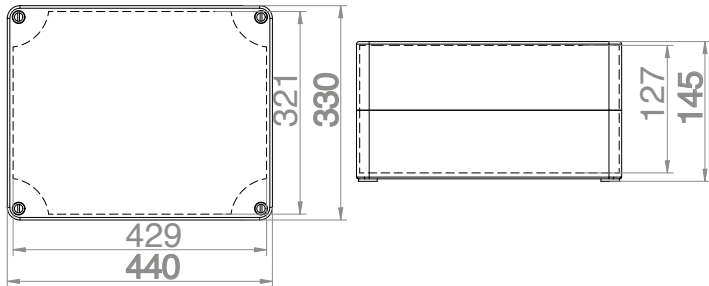

- sturdy locks with springs
- cover: polycarbonate >PC<
- machine sealing


IP 55 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 102X102X47 WITH 7 GLANDS

Type	Color	Pack.	Weight	Index
Industrial IP55	Grey RAL 7035	1 pc.	kg/1pc.	2700-02

NORM PN-EN-60670-1
Inside dimensions: 65x65x30
Outside dimensions: 102x102x47

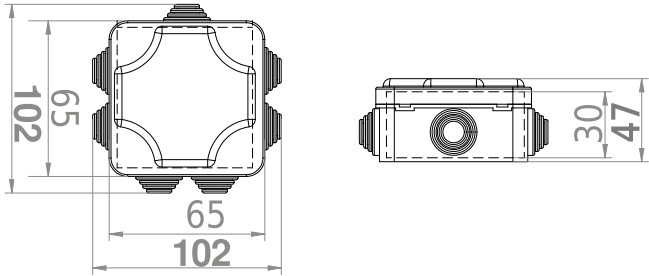


IP 55 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 129X129X61 WITH 7 GLANDS

Type	Color	Pack.	Weight	Index
Industrial IP55	Grey RAL 7035	1 pc.	kg/1pc.	2701-02

NORM PN-EN-60670-1
Inside dimensions: 100x100x50
Outside dimensions: 129x129x61

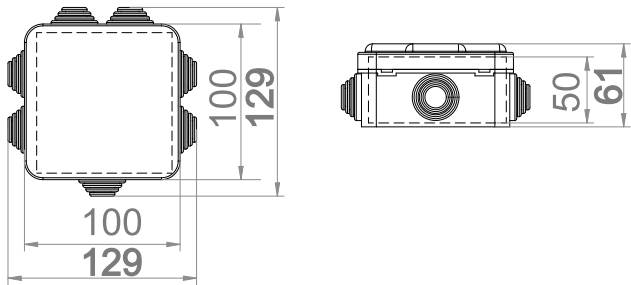


IP 55 IK 07 400 V Br Cl




INDUSTRIAL JUNCTION BOX N/T 130X95X58 WITH 8 GLANDS

Type	Color	Pack.	Weight	Index
Industrial IP55	Grey RAL 7035	1 pc.	kg/1pc.	2703-02

NORM PN-EN-60670-1
Inside dimensions: 105x70x48
Outside dimensions: 130x95x58

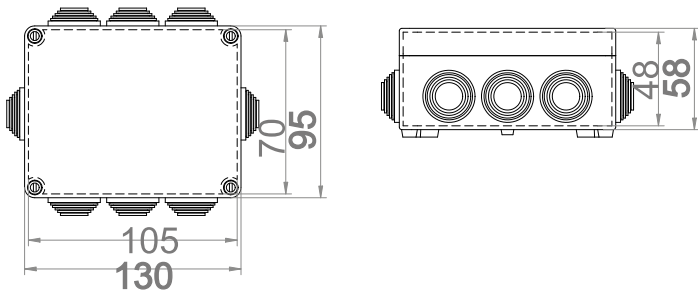


IP 55 IK 07 400 V Br Cl




INDUSTRIAL JUNCTION BOX N/T 156X95X68 WITH 8 GLANDS

Type	Color	Pack.	Weight	Index
Industrial IP55	Grey RAL 7035	pc.	kg/1pc.	
		1	-	2705-02

NORM PN-EN-60670-1
Inside dimensions: 130x69x57
Outside dimensions: 156x95x68

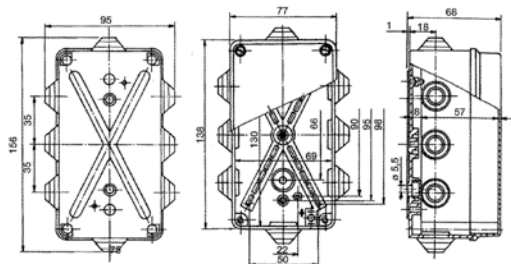


IP 55 IK 07 400 V Br Cl




INDUSTRIAL JUNCTION BOX N/T 198X139X82 WITH 8 GLANDS

Type	Color	Pack.	Weight	Index
Industrial IP55	Grey RAL 7035	pc.	kg/1pc.	
		1	-	2707-02

NORM PN-EN-60670-1
Inside dimensions: 164x99x68
Outside dimensions: 198x139x82

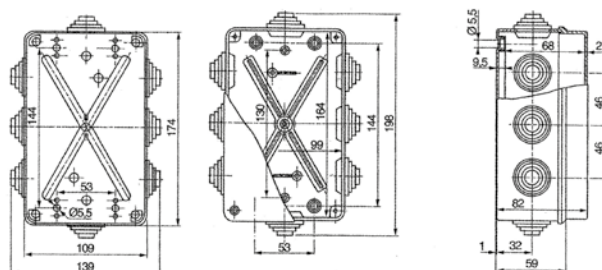


IP 55 IK 07 400 V Br Cl




INDUSTRIAL JUNCTION BOX N/T 198X163X80 WITH 10 GLANDS

Type	Color	Pack.	Weight	Index
Industrial IP55	Grey RAL 7035	pc.	kg/1pc.	
		1	-	2711-02

NORM PN-EN-60670-1
Inside dimensions: 164x129x68
Outside dimensions: 198x163x80


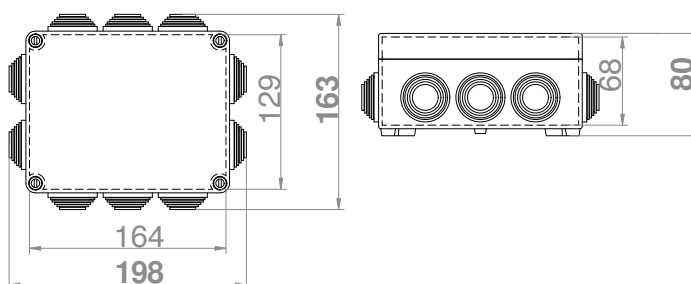




INDUSTRIAL JUNCTION BOX N/T 249X198X81 WITH 10 GLANDS

Type	Color	Pack.	Weight	Index
Industrial IP55	Grey RAL 7035	pc. 1	kg/1pc. -	2716-02



NORM PN-EN-60670-1
Inside dimensions: 214x162x69
Outside dimensions: 249x198x81

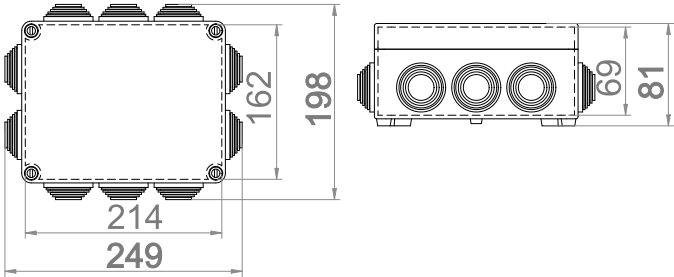

INDUSTRIAL JUNCTION BOX N/T 305X244X126 WITH 12 GLANDS

Type	Color	Pack.	Weight	Index
Industrial IP55	Grey RAL 7035	pc. 1	kg/1pc. -	2721-02


NORM PN-EN-60670-1
Inside dimensions: 267x207x111
Outside dimensions: 305x244x126

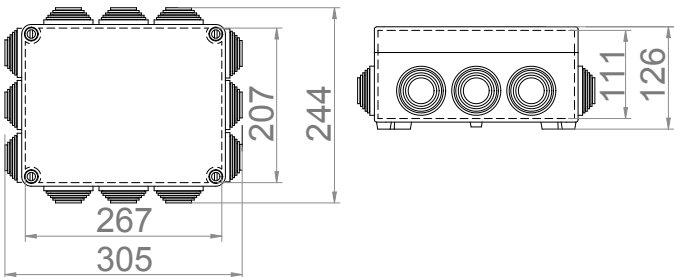


INDUSTRIAL JUNCTION BOX N/T 305X244X168 WITH 12 GLANDS

Type	Color	Pack.	Weight	Index
Industrial IP55	Grey RAL 7035	pc. 1	kg/1pc. -	2722-02

NORM PN-EN-60670-1
Inside dimensions: 267x207x153
Outside dimensions: 305x244x168

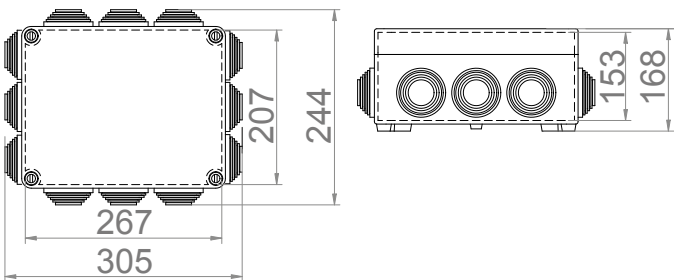

IP 55 IK 07 400 V Br Cl




INDUSTRIAL JUNCTION BOX N/T 342X282X115 WITH 14 GLANDS

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP55	Grey RAL 7035	1	-	2723-02

NORM PN-EN-60670-1
 Inside dimensions: 300x240x100
 Outside dimensions: 342x282x115

IP 55 IK 07 400 V Br Cl



INDUSTRIAL JUNCTION BOX N/T 342X282X165 WITH 14 GLANDS

Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
Industrial IP55	Grey RAL 7035	1	-	2724-02


NORM PN-EN-60670-1
 Inside dimensions: 300x240x150
 Outside dimensions: 342x282x165



INDUSTRIAL CASING SR1 252X352X142 IP65

Type	Color	Pack. pc.	Weight kg/1pc.	Index
INDUSTRIAL SR1	Grey RAL 7035	1	1,9	2753-00
INDUSTRIAL SR1	Transparent	1	1,9	2753-01
INDUSTRIAL SR1	Grey RAL 7035 (UV)	1	1,9	2753-02


NORM: PN-EN 62208 : 2011, PN-EN 60670-24 :2013
Equipped with:
- top hinged cover, galvanized steel mounting plate, key locks.
Machine sealing.
Inside dimensions: 197x297x110
Outside dimensions: 252x352x162

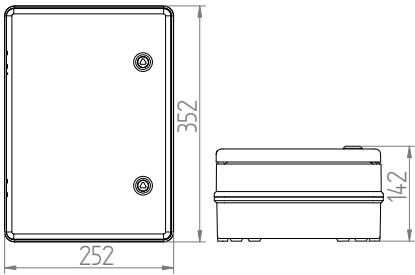

INDUSTRIAL CASING SR2 252X352X162 IP65

Type	Color	Pack. pc.	Weight kg/1pc.	Index
INDUSTRIAL SR2	Grey RAL 7035	1	2,0	2754-00
INDUSTRIAL SR2	Transparent	1	2,0	2754-01
INDUSTRIAL SR2	Grey RAL 7035 (UV)	1	2,0	2754-02


NORM: PN-EN 62208 : 2011, PN-EN 60670-24 :2013
Equipped with:
- top hinged cover, galvanized steel mounting plate, key locks.
Machine sealing.
Inside dimensions: 197x297x130
Outside dimensions: 252x352x162

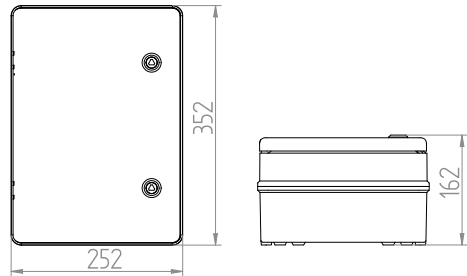

INDUSTRIAL CASING SR3 356X456X162 IP65

Type	Color	Pack. pc.	Weight kg/1pc.	Index
INDUSTRIAL SR3	Grey RAL 7035	1	3,6	2755-00
INDUSTRIAL SR3	Transparent	1	3,6	2755-01
INDUSTRIAL SR3	Grey RAL 7035 (UV)	1	3,6	2755-02

NORM: PN-EN 62208 : 2011, PN-EN 60670-24 :2013
Equipped with:
- top hinged cover, galvanized steel mounting plate, key locks.
Machine sealing.
Inside dimensions: 287x387x130
Outside dimensions: 356x456x162

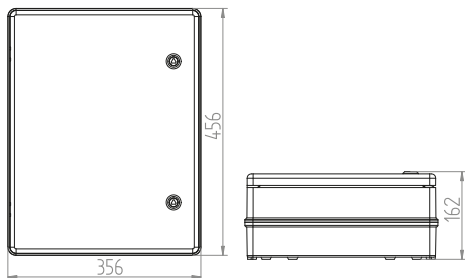

IP 65 IK 08 ABS 400 °C Br/Cl UV



SR4



INDUSTRIAL CASING SR4 210X280X130 IP65


Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
INDUSTRIAL IP65	Grey RAL 7035	1	-	2760-00

- 1 mm galvanized steel mounting plate included
- door and base made of plastic >ABS<
- universal door left/right
- ¼ turn plastic key included
- hooks for height adjustment of the mounting plate

NORM: PN-EN 62208 : 2011, PN-EN 60670-24 :2013

Dimensions: 210x280x130 mm

Inside dimensions: 160x235x115 mm

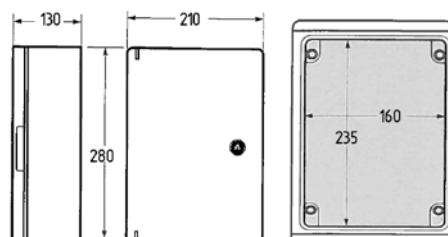

IP 65 IK 08 ABS 400 °C Br/Cl UV



SR5



INDUSTRIAL CASING SR5 300X400X165 IP65


Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
INDUSTRIAL IP65	Grey RAL 7035	1	-	2761-00

- 1 mm galvanized steel mounting plate included
- door and base made of plastic >ABS<
- universal door left/right
- ¼ turn plastic key included
- hooks for height adjustment of the mounting plate

NORM: PN-EN 62208 : 2011, PN-EN 60670-24 :2013

Dimensions: 300x400x165 mm

Inside dimensions: 250x352x150 mm

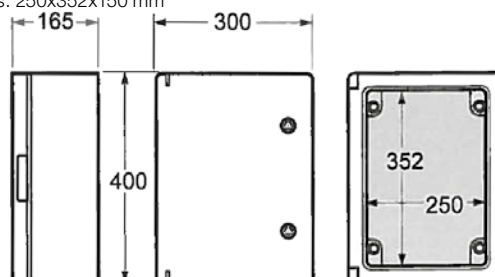

IP 65 IK 08 ABS 400 °C Br/Cl UV



SR6



INDUSTRIAL CASING SR6 400X500X175 IP65


Type	Color	Pack.	Weight	Index
		pc.	kg/1pc.	
INDUSTRIAL IP65	Grey RAL 7035	1	-	2762-00

- 1 mm galvanized steel mounting plate included
- door and base made of plastic >ABS<
- universal door left/right
- ¼ turn plastic key included
- hooks for height adjustment of the mounting plate

NORM: PN-EN 62208 : 2011, PN-EN 60670-24 :2013

Dimensions: 400x500x175 mm

Inside dimensions: 352x453x150 mm

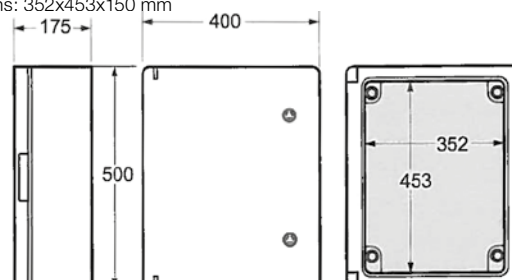

IP 65 IK 08 ABS 400 °C Br/Cl UV



SR7

INDUSTRIAL CASING SR7 400X600X200 IP65


Type	Color	Pack.	Weight	Index
INDUSTRIAL IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	-	2763-00

- 1 mm galvanized steel mounting plate included
- door and base made of plastic >ABS<
- universal door left/right
- ¼ turn plastic key included
- hooks for height adjustment of the mounting plate

NORM: PN-EN 62208 : 2011, PN-EN 60670-24 :2013

Dimensions: 600x400x200 mm

Inside dimensions: 548x352x185 mm

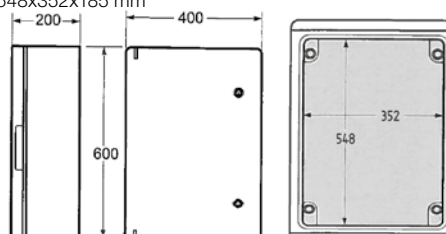

IP 65 IK 08 ABS 400 °C Br/Cl UV



SR8

INDUSTRIAL CASING SR8 500X700X245 IP65


Type	Color	Pack.	Weight	Index
INDUSTRIAL IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	-	2764-00

- 1 mm galvanized steel mounting plate included
- door and base made of plastic >ABS<
- universal door left/right
- ¼ turn plastic key included
- hooks for height adjustment of the mounting plate

NORM: PN-EN 62208 : 2011, PN-EN 60670-24 :2013

Dimension: 700x500x245 mm

Inside dimensions: 637x450x215 mm

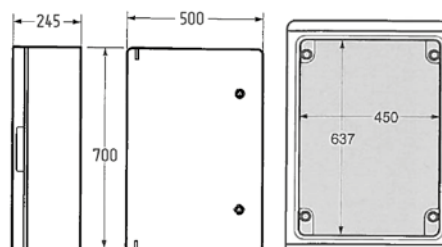

IP 65 IK 08 ABS 400 °C Br/Cl UV



SR9

INDUSTRIAL CASING SR9 500X700X245 IP65


Type	Color	Pack.	Weight	Index
INDUSTRIAL IP65	Grey RAL 7035	pc.	kg/1pc.	
		1	-	2765-00

- 1 mm galvanized steel mounting plate included
- door and base made of plastic >ABS<
- universal door left/right
- ¼ turn plastic key included
- hooks for height adjustment of the mounting plate

NORM: PN-EN 62208 : 2011, PN-EN 60670-24 :2013

Dimensions: 800x600x265 mm

Inside dimensions: 738x550x235 mm

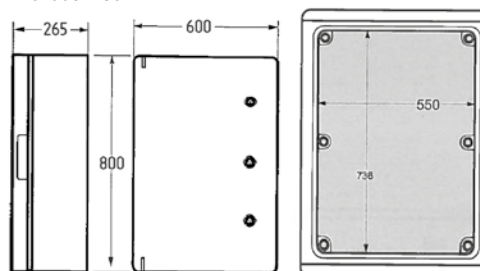


400 V PA



BRANCH PLATE 4X2,5 mm²

Type	Color	Pack.	Weight	Index
branch plate	Black RAL 9005	pc. 50	kg/100 pc. 3,10	0951-00

NORM: PN-IEC-60998-1:2006.




400 V PA



BRANCH PLATE 4X4 mm²

Type	Color	Pack.	Weight	Index
branch plate	Black RAL 9005	pc. 50	kg/100 pc. 3,40	0952-00

NORM: PN-IEC-60998-1:2006.




400 V PA



BRANCH PLATE 4X10 mm²

Type	Color	Pack.	Weight	Index
branch plate	Black RAL 9005	pc. 25	kg/100 pc. 6,62	0953-00

NORM: PN-IEC-60998-1:2006.




400 V PA



BRANCH PLATE 4 X 16 mm²

Type	Color	Pack.	Weight	Index
branch plate	czarny RAL 9005	pc. 10	kg/100 pc. 12,30	0965-00

NORM: PN-IEC-60998-1:2006.




400 V PA



BRANCH PLATE 5X2,5 mm²

Type	Color	Pack.	Weight	Index
branch plate	Grey RAL 7035	50 pc.	4,03 kg/100 pc.	0961-00

NORM: PN-IEC-60998-1:2006.




400 V PA



BRANCH PLATE 5X4 mm²

Type	Color	Pack.	Weight	Index
branch plate	Black RAL 9005	50 pc.	3,70 kg/100 pc.	0962-00

NORM: PN-IEC-60998-1:2006.




400 V PA



BRANCH PLATE 5 X 10 mm²

Type	Color	Pack.	Weight	Index
branch plate	Black RAL 9005	25 pc.	8,80 kg/100 pc.	0963-00

NORM: PN-IEC-60998-1:2006.




400 V PA



BRANCH PLATE 5 X 16 mm²

Type	Color	Pack.	Weight	Index
branch plate	Grey RAL 7035	10 pc.	15,20 kg/100 pc.	0966-00

NORM: PN-IEC-60998-1:2006.



400 V PA



CONNECTOR 2,5 MM²

Type	Color	Pack.	Weight	Index
Connector 2,5 mm²	White RAL 9003	50 pc.	0,45 kg/100 pc.	0940-00
	Red RAL 3020	50	0,45	0940-01
	Blue RAL 5005	50	0,45	0940-02
	Green RAL 6001	50	0,45	0940-03
	Yellow RAL 1021	50	0,45	0940-04

NORM: PN-IEC-60998-1:2006.







RoHS

2.5 MM²

TERMINAL BAR LZ12 – 2.5 mm² SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
LZ12 – 2,5mm	Orange RAL 2000	pc.	kg/100 pc.	
		100	1,9	0930-00

Terminal bar LZ12 – 2.5 mm self-extinguishing
NORM: PN-IEC-60998-1:2006
Dimensions: A/B/C/D/E – 94/13/16/8/6mm





RoHS

4 MM²

TERMINAL BAR LZ12 – 4 mm² SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
LZ12 – 4mm	Orange RAL 2000	pc.	kg/100 pc.	
		100	2,5	0931-00

Terminal bar LZ12 – 4 mm self-extinguishing
NORM: PN-IEC-60998-1:2006
Dimensions: A/B/C/D/E – 106/14/18/9/7mm





RoHS

6 MM²

TERMINAL BAR LZ12 – 6 mm² SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
LZ12 – 6mm	Orange RAL 2000	pc.	kg/100 pc.	
		100	3,5	0932-00

Terminal bar LZ12 – 6 mm self-extinguishing
NORM: PN-IEC-60998-1:2006
Dimensions: A/B/C/D/E – 118/15/19/9/7mm





RoHS

10 MM²

TERMINAL BAR LZ12 – 10 mm² SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
LZ12 – 10mm	Orange RAL 2000	pc.	kg/100 pc.	
		100	3,65	0933-00

Terminal bar LZ12 – 10 mm self-extinguishing
NORM: PN-IEC-60998-1:2006
Dimensions: A/B/C/D/E – 141/20/25/12/9mm





RoHS

16 MM²

TERMINAL BAR LZ12 – 16 mm² SELF-EXTINGUISHING

Type	Color	Pack.	Weight	Index
LZ12 – 16mm	Orange RAL 2000	pc.	kg/100 pc.	
		100	3,8	0934-00

Terminal bar LZ12 – 16 mm self-extinguishing
NORM: PN-IEC-60998-1:2006
Dimensions: A/B/C/D/E – 153/22/27/13/10mm

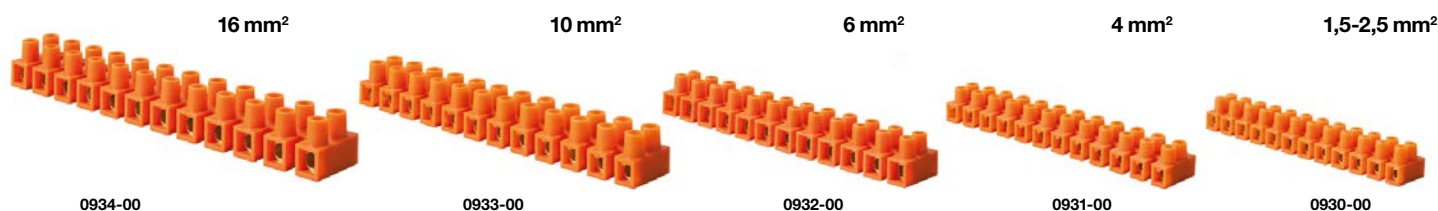





















0934-00

0933-00

0932-00

0931-00

0930-00

FIRST NUMBER Protection against object		SECOND NUMBER Protection against object		IK CODE Protection against mechanical impact	
IP	TEST	IP	TEST	IK	TEST
0	 no protection	0	 no protection	00	 no protection
1	 protection against object diameter > 50 mm for example hand	1	 protection against vertical drops	01-05	 energy impact < 1 J
2	 protection against object diameter > 12 mm (for example finger)	2	 protection against direct shower under the angle till 15 degrees since vertical	06	 energy impact 1 J
3	 protection against object diameter > 2,5 mm (for example tool or wiret)	3	 protection against direct shower under the angle till 60 degrees since vertical	07	 energy impact 2 J
4	 protection against object diameter > 1 mm (for example tool or wiret)	4	 protection against spray water dropping from all directions: approved limited water flow	08	 energy impact 5 J
5	 limited protection against dust	5	 protection against water flowing under low pressure dropping from all directions, approved limited water flowing	09	 energy impact 10 J
6	 full protection against dust	6	 protection against strong water flowing dropping from all directions approved limited water flowing	10	 energy impact 20 J
Degree protection is determined by IP classification. In the classification there are two numbers that define the degree protection against solid objects and against liquids.		7	 protection against drowning to depth between 15 cm to 1 m		
		8	 protection against long lasting under pressure drowning to depth over 1m		




Equipment hermetic

- AQUANT IP 55 / IP 65
- HERMES / HERMES 2
- BERG

AQUANT™

Surface-mounted sockets and switches with increased resistance to water and dust

- degree of protection IP 55/65
- robust construction
- innovative sealing of connector and socket
- durable mechanism with proven design
- wide range of connectors with a card holder for circuit description
- 16A sockets (threaded terminals)
10AX connectors (threaded terminals)
- sockets of French type or schuko
- increased resistance to UV rays
- impact resistance in degree IK 07
- ABS + TPE material
- working temperature range -25°C to + 70°C
- housing color light gray RAL 7035
- flap color gray RAL 7043
- double and triple socket sets in one base
- available socket combinations with switch
- can be configured in horizontal and vertical sets

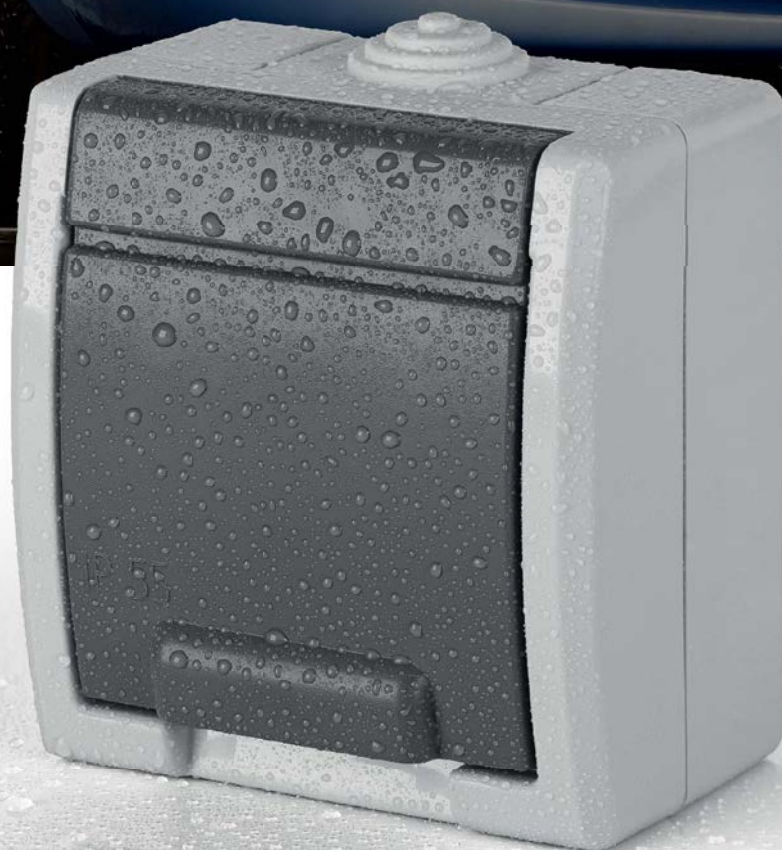

Application:

- logistics halls
- garage halls
- industrial plants
- laundries, basements
- machine industry

Advantages:

- durable sealing thanks to 2-component technology
- dust and water flow will not disturb the Aquant™ Series fittings
- sealed housing
- flexible membrane constituting a specific barrier between external elements (keys and flaps) and the internal electrical component
- additional protection integrated with the base in the form of movable glands rubber


IP 55 IK 07 ABS TPE



AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	Casing Grey RAL 7035	10	1,52	1201-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP55
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 DOUBLE POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	Casing Grey RAL 7035	10	1,52	1202-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP55
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 TWO POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2	Casing Grey RAL 7035	10	1,52	1203-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP55
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 PUSH „LIGHT” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	Casing Grey RAL 7035	10	1,52	1204-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP55
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 PUSH „BELL” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	Casing Grey RAL 7035	10	1,52	1205-10
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP55
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 CROSSED SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	Casing Grey RAL 7035 Button Grey RAL 7043	10	1,52	1206-10

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP55
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP55 PUSH „KEY” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-8	Casing Grey RAL 7035 Button Grey RAL 7043	10	1,52	1207-10

Button with pictogram „key”
NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP55
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE




AQUANT IP55 JALOUSIE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-8	Casing Grey RAL 7035 Button Grey RAL 7043	10	1,52	1208-10

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP55
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm



AQUANT™

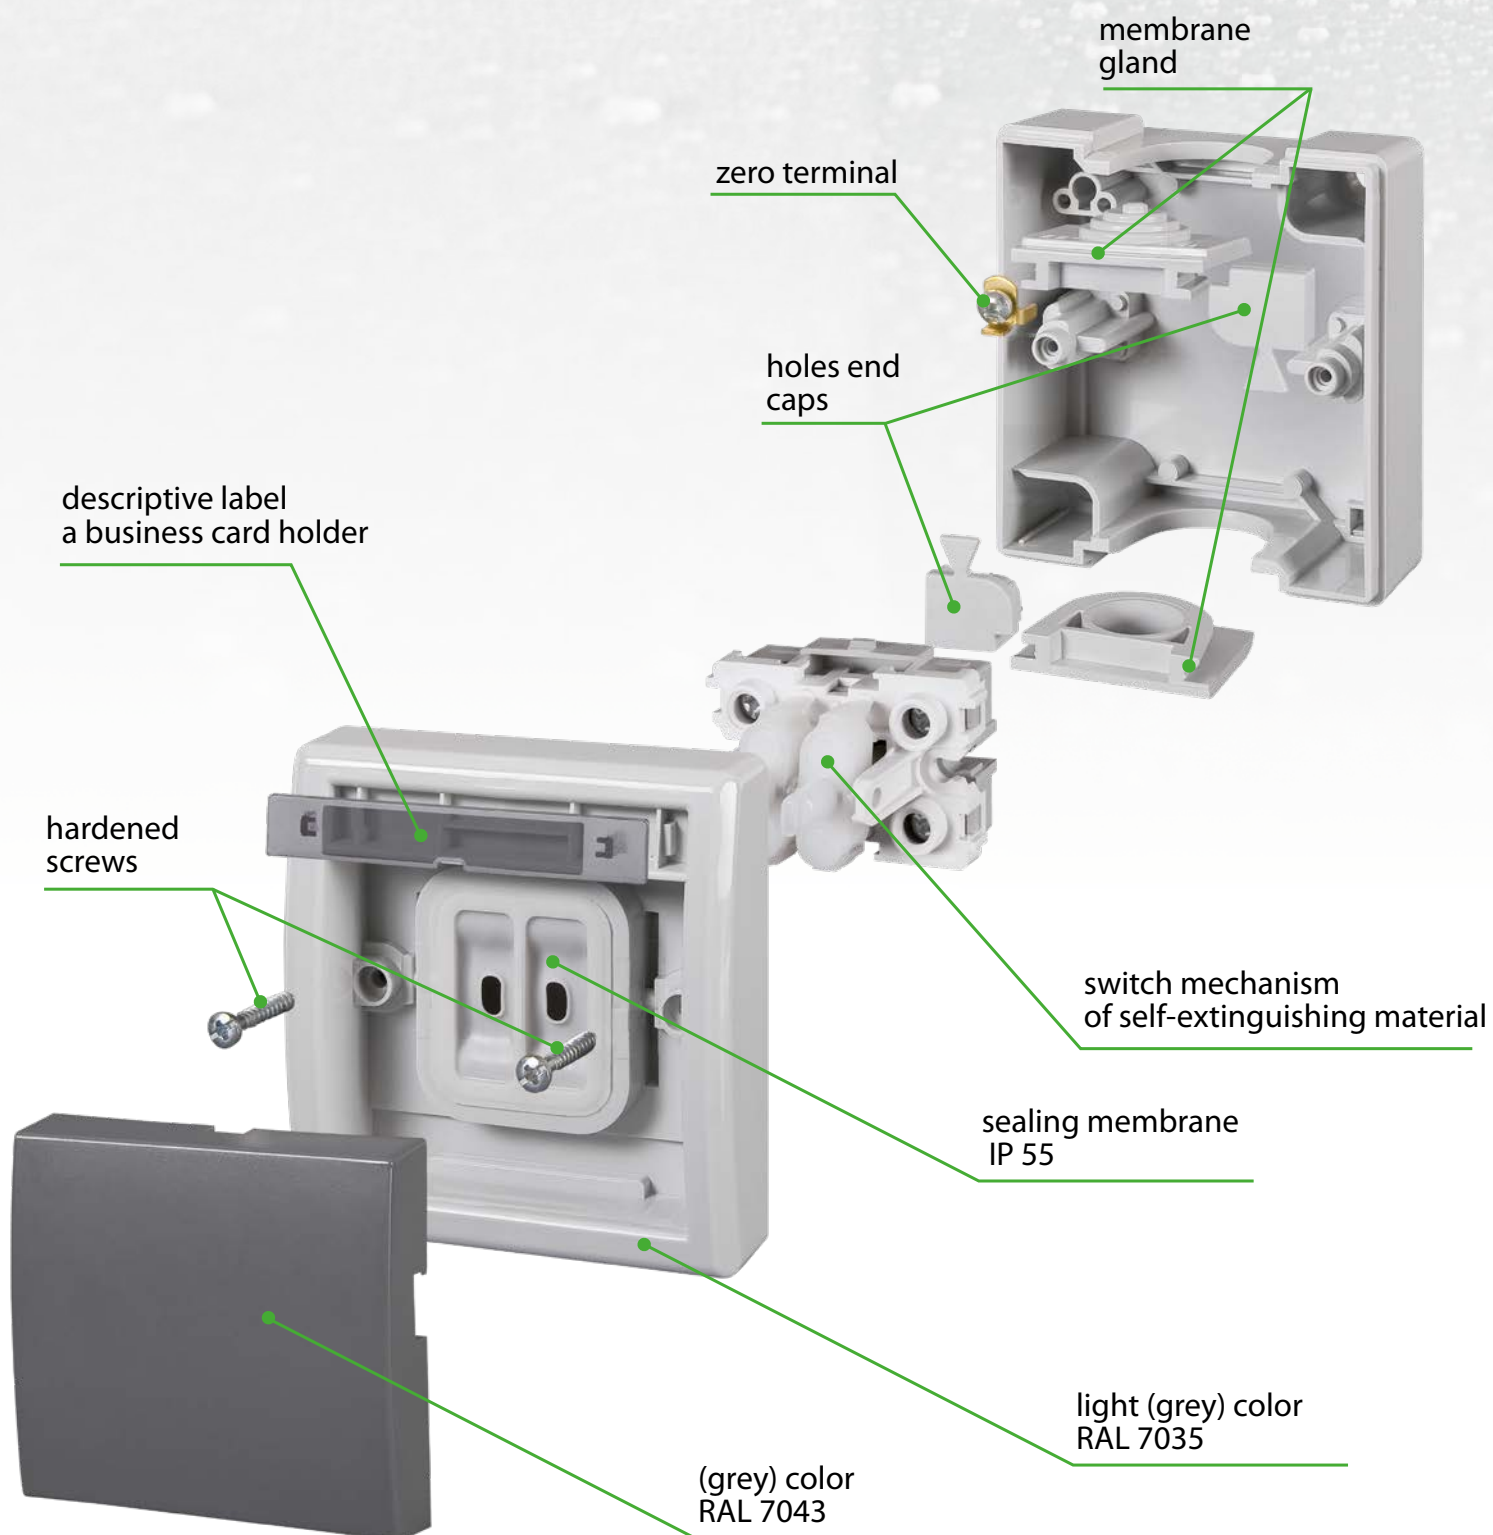


IP 55 IK 07 ABS TPE



AQUANT IP 55 SOCKET 2P+Z

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	Casing Grey RAL 7035	10	1,50	1241-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP55
Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 SOCKET 2X2P+Z WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z H	Casing Grey RAL 7035	10	2,50	1242-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Gniazdo 2x2P+Z with contact shield
Protection degree IP55
Dimension: 153mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 SOCKET 2X2P+Z WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z V	Casing Grey RAL 7035	10	2,50	1252-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Gniazdo 2x2P+Z with contact shield
Protection degree IP55
Dimension: 76mm x 163mm x 57mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 SOCKET 3X2P+Z WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z H	Casing Grey RAL 7035	4	1,60	1243-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Gniazdo 3x2P+Z with contact shield
Protection degree IP55
Dimension: 230mm x 81mm x 58mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 SOCKET „SCHUKO”

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z sch	Casing Grey RAL 7035	10	1,50	1244-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP55
Dimension: 76mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 SOCKET DOUBLE „SCHUKO”

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z H sch	Casing Grey RAL 7035	10	2,50	1245-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP55
Dimension: 153mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 SOCKET 2X2P+Z SCHUKO WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z V schuko	Casing Grey RAL 7035	10	2,50	1254-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP55
Dimension: 76mm x 163mm x 57mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 SOCKET 3X2P+Z SCHUKO WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z H schuko	Casing Grey RAL 7035	4	1,60	1246-10
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP55
Dimension: 230mm x 81mm x 58mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH + 2P+Z SOCKET HORIZONTAL AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH + 2P+Z SOCKET VERTICAL

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2P+Z H	RAL 7035+RAL 7043 (grey)	10	2,50	1247-10*
ŁNT-1+GNT 2P+Z V	RAL 7035+RAL 7043 (grey)	10		1256-10*

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP55
Dimension: 153mm x 81mm x 56mm




IP 55 IK 07 ABS TPE



AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH + 2X2P+Z SOCKET HORIZONTAL AQUANT IP 55 SINGLE POLE / TWO WAY SWITCH + 2X2P+Z SOCKET VERTICAL

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2x2P+Z H	RAL 7035+RAL 7043 (grey)	4	1,60	1249-10*
ŁNT-1+GNT 2x2P+Z V	RAL 7035+RAL 7043 (grey)	4		1262-10*



NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP55
Dimension: 230mm x 81mm x 58mm



AQUANT ADAPTER FOR VERTICAL CONNECTION OF SOCKETS AND SWITCHES

Typ	Color	Pack. pc.	Weight pc./kg	Index
Adapter	Grey RAL 7035	5	1,085	1280-10

Adapter for vertical connection of sockets and switches of AQUANT sockets and switches



AQUANT CABLE GLANDS

Typ	Color	Pack. pc.	Weight pc./kg	Index
Gland	Grey RAL 7035	10	1,085	1281-10

Cable glands


IP 65 IK 07 ABS TPE



AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	Casing Grey RAL 7035	8	1,52	1201-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP 65
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 DOUBLE POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	Casing Grey RAL 7035	8	1,52	1202-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP 65
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 TWO POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2	Casing Grey RAL 7035	8	1,52	1203-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP 65
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 PUSH „LIGHT” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	Casing Grey RAL 7035	8	1,52	1204-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP 65
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 PUSH „BELL” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	Casing Grey RAL 7035	8	1,52	1205-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP 65
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 CROSSED SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	Casing Grey RAL 7035	10	1,52	1206-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP 65
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 PUSH „KEY” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-8	Casing Grey RAL 7035	10	1,52	1207-65
	Button Grey RAL 7043			

Button with pictogram „key”
NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP 65
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 JALOUSIE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-8	Casing Grey RAL 7035	10	1,52	1208-65
	Button Grey RAL 7043			

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP 65
Includes perimeter descriptive card.
Dimension: 76mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 SOCKET (2P+Z)

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	Casing Grey RAL 7035	8	1,50	1241-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP 65
Dimension: 76mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 SOCKET 2X2P+Z WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z H	Casing Grey RAL 7035	4	2,50	1242-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Gniazdo 2x2P+Z with contact shield
Protection degree IP 65
Dimension: 153mm x 81mm x 56mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 SOCKET 2X2P+Z WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z V	Casing Grey RAL 7035	4	2,50	1252-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Gniazdo 2x2P+Z with contact shield
Protection degree IP 65
Dimension: 76mm x 163mm x 57mm




IP 65 IK 07 ABS TPE



AQUANT IP 65 SOCKET 3X2P+Z WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z H	Casing Grey RAL 7035	3	1,60	1243-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Gniazdo 3x2P+Z with contact shield
Protection degree IP 65
Dimension: 230mm x 81mm x 58mm

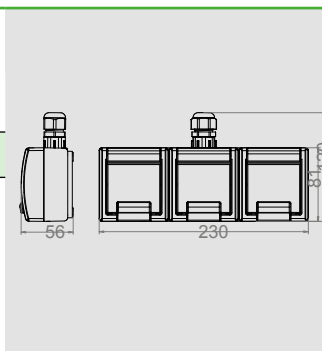

IP 65 IK 07 ABS TPE




AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH + 2P+Z SOCKET HORIZONTAL

AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH + 2P+Z SOCKET VERTICAL

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2P+Z H	RAL 7035+RAL 7043 (grey)	4	2,50	1247-65*
ŁNT-1+GNT 2P+Z V	RAL 7035+RAL 7043 (grey)			1256-65*

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP 65
Dimension: 153mm x 81mm x 56mm

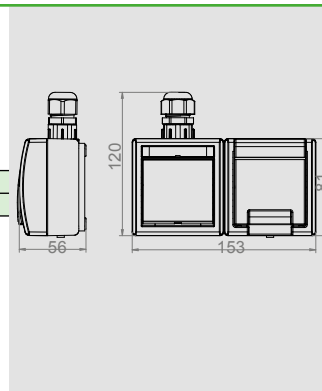

IP 65 IK 07 ABS TPE






AQUANT IP 65 SOCKET „SCHUKO”

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z sch	Casing Grey RAL 7035	8	1,50	1244-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP 65
Dimension: 76mm x 81mm x 56mm



IP 65 IK 07 ABS TPE






AQUANT IP 65 SOCKET DOUBLE „SCHUKO”

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z H sch	Casing Grey RAL 7035	4	2,50	1245-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP 65
Dimension: 153mm x 81mm x 56mm



IP 65 IK 07 ABS TPE






AQUANT IP 65 SOCKET 2X2P+Z WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z V sch	Casing Grey RAL 7035	4	2,50	1254-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP 65
Dimension: 76mm x 163mm x 57mm



IP 65 IK 07 ABS TPE






AQUANT IP 65 SOCKET 3X2P+Z WITH CONTACT SHIELD

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z H sch	Casing Grey RAL 7035	3	1,60	1246-65
	Flap Grey RAL 7043			

NORM: PN-IEC 60448-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP 65
Dimension: 230mm x 81mm x 58mm



IP 65 IK 07 ABS TPE






AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH + 2X2P+Z SOCKET HORIZONTAL AQUANT IP 65 SINGLE POLE / TWO WAY SWITCH + 2X2P+Z SOCKET VERTICAL

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2x2P+Z H	RAL 7035+RAL 7043 (grey)	3	1,60	1249-65*
ŁNT-1+GNT 2x2P+Z V	RAL 7035+RAL 7043 (grey)			1262-65*

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16AX/250V~ screw terminals
Socket 2P+Z with contact shield
Protection degree IP 65
Dimension: 230mm x 81mm x 58mm



The logo for 'epn' is displayed in white lowercase letters on a green square background.

HERMES



HERMES IP 44 is a series of surface-mounted hermetic equipment manufactured by the company ELEKTRO-PLAST Nasielsk. The resistance of the HERMES IP 44 series products to moisture and dust, and the

original design positions the series as the leader among the hermetic series available on the market. In the HERMES series there is the possibility of modular building of blocks, eg a switch with a socket in one body.



Equipment **hermetic**

Advantages:

- the Hermes series is a leader among the hermetic series available on the market
- illuminated switches with the option of diode exchange
- resistance to moisture and dust
- possibility of modular block creation, eg switch with socket in one body
- original design
- accessories available in colors: white, cream, brown
- multiple sockets completely tied LgY
- Hermes series works well everywhere where there are difficult conditions, eg in garage halls, laundries, warehouses, food and outdoor premises



HERMES HERMETIC SWITCHES and SOCKETS

- hermetic for indoor and outdoor applications
- leader among hermetic series available on the market
- use in garages, laundries, warehouses, catering facilities
- anthracite color RAL 7016




IP 44 **ABS**



HERMES IP 44 SINGLE POLE / TWO WAY SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	Anthracite RAL 7016	12	1,085	0331-07

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 **ABS**



HERMES IP 44 DOUBLE POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	Anthracite RAL 7016	12	1,085	0332-07

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 **ABS**



HERMES IP 44 PUSH „BELL” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	Anthracite RAL 7016	12	1,085	0337-07

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 SOCKET FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	Anthracite RAL 7016	12	1,085	0321-07

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	Anthracite RAL 7016	12	2,24	0322-07

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3X SOCKET FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	Anthracite RAL 7016	4	1,14	0323-07

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET SCHUKO FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	Anthracite RAL 7016	12	1,085	0324-07

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE SCHUKO FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	Anthracite RAL 7016	12	2,24	0325-07

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3XSOCKET SCHUKO FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	Anthracite RAL 7016	4	1,14	0326-07

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SINGLE POLE / TWO WAY SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	12	1,085	0331-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 DOUBLE POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	White RAL 9003	12	1,085	0332-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 TWO POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2	White RAL 9003	12	1,085	0333-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 PUSH „LIGHT” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	White RAL 9003	12	1,085	0336-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 PUSH „BELL” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	White RAL 9003	12	1,085	0337-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 CROSSED SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	White RAL 9003	12	1,085	0338-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm



IP 44 ABS


NOWOŚĆ



HERMES IP 44 PUSH „KEY” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	White RAL 9003	12	1,085	0340-02

Button with pictogram „key”
NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 SINGLE POLE / TWO WAY SWITCH ILLUMINATED

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+n	White RAL 9003	12	1,085	0341-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self clamps
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 PUSH „BELL” SWITCH ILLUMINATED

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D+n	White RAL 9003	12	1,085	0347-02

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self clamps
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 SINGLE POLE / TWO WAY SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	Brown RAL 8028	12	1,085	0331-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 DOUBLE POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	Brown RAL 8028	12	1,085	0332-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 TWO POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-2	Brown RAL 8028	12	1,085	0333-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 PUSH „LIGHT” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	Brown RAL 8028	12	1,085	0336-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 PUSH „BELL” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	Brown RAL 8028	12	1,085	0337-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/230V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 CROSSED SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	Brown RAL 8028	12	1,085	0338-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 SINGLE POLE / TWO WAY SWITCH ILLUMINATED

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+n	Brown RAL 8028	12	1,085	0341-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self clamps
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 PUSH „BELL” SWITCH ILLUMINATED

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D+n	Brown RAL 8028	12	1,085	0347-06

NORM: PN-EN-60669-1:2006
Switches: 10AX/250V~ self clamps
Protection degree IP44
Dimension: 65mm x 75mm x 46mm




IP 44 ABS



HERMES IP 44 SOCKET SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9016	12	1,085	0321-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9016	12	2,24	0322-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3XSOCKET SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	White RAL 9016	4	1,14	0323-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9016	12	1,085	0321-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9016	12	2,24	0322-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3X SOCKET FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	White RAL 9016	4	1,14	0323-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	Brown RAL 8028	12	1,085	0321-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	Brown RAL 8028	12	2,24	0322-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3XSOCKET SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	Brown RAL 8028	4	1,14	0323-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	Brown RAL 8028	12	1,085	0321-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	Brown RAL 8028	12	2,24	0322-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3X SOCKET FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	Brown RAL 8028	4	1,14	0323-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET SCHUKO SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	White RAL 9016	12	1,085	0324-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE SCHUKO SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	White RAL 9016	12	2,24	0325-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3XSOCKET SCHUKO SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	White RAL 9016	4	1,14	0326-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET SCHUKO FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	White RAL 9016	12	1,085	0324-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE SCHUKO FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	White RAL 9016	12	2,24	0325-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3XSOCKET SCHUKO FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	White RAL 9016	4	1,14	0326-02

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET SCHUKO SMOKY FLAP

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	Brown RAL 8028	12	1,085	0324-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE SCHUKO SMOKY FLAP

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	Brown RAL 8028	12	2,24	0325-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3XSOCKET SCHUKO SMOKY FLAP

Type	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	Brown RAL 8028	4	1,14	0326-05

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET „SCHUKO” FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	Brown RAL 8028	12	1,085	0324-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SOCKET DOUBLE „SCHUKO” FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	Brown RAL 8028	12	2,24	0325-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 3XSOCKET „SCHUKO” FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	Brown RAL 8028	4	1,14	0326-06

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SINGLE POLE / TWO WAY SWITCH + SOCKET 2P+Z

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2P+Z	White RAL 9003 + transp.	12	1,085	0327-11

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SINGLE POLE / TWO WAY SWITCH + SOCKET 2P+Z

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2P+Z	White RAL 9003	12	2,24	0327-12

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 DOUBLE POLE SWITCH + SOCKET 2P+Z

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5+GNT 2P+Z	White RAL 9003 + transp.	12	2,24	0327-13

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 DOUBLE POLE SWITCH + SOCKET 2P+Z

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5+GNT 2P+Z	White RAL 9003	12	2,24	0327-14

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 130 mm x 75 mm x 48mm




IP 44 ABS



HERMES IP 44 SINGLE POLE / TWO WAY SWITCH + SOCKET 2X2P+Z

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1+GNT 2x2P+Z	White RAL 9003 + transp.	4	1,14	0327-21

NORM: PN-EN-60669-1:2006, PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 195 mm x 75 mm x 48mm



IP 44

ABS



HERMES 2 IP 44 SINGLE POLE SWITCH


Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9016	12	1,18	1001-00
	White+transp.*			1001-01

NORM: PN-EN-60669-1:2006

Switches: 10AX/250V~ screw terminals

Protection degree IP44

Dimension: 65mm x 69mm x 48mm





IP 44

ABS



HERMES 2 IP 44 DOUBLE POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	White RAL 9016	12	1,18	1002-00
	White+transp.*			1002-01


NORM: PN-EN-60669-1:2006

Switches: 10AX/250V~ screw terminals

Protection degree IP44

Dimension: 65mm x 69mm x 48mm





IP 44

ABS



HERMES 2 IP 44 TWO WAY SWITCHWHITE+TRANSP.*


Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-3	White RAL 9016	12	1,18	1003-00
	White+transp.*			1003-01


NORM: PN-EN-60669-1:2006

Switches: 10AX/250V~ screw terminals

Protection degree IP44

Dimension: 65mm x 69mm x 48mm





IP 44

ABS



HERMES 2 IP 44 PUSH „LIGHT” SWITCH


Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1S	White RAL 9016	12	1,18	1004-00
	White+transp.*			1004-01


NORM: PN-EN-60669-1:2006

Switches: 10AX/250V~ screw terminals

Protection degree IP44

Dimension: 65mm x 69mm x 48mm





IP 44

ABS



HERMES 2 IP 44 PUSH „BELL” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1D	White RAL 9016	12	1,18	1005-00
	White+transp.*			1005-01


NORM: PN-EN-60669-1:2006

Switches: 10AX/250V~ screw terminals

Protection degree IP44

Dimension: 65mm x 69mm x 48mm





IP 44

ABS



HERMES 2 IP 44 CROSSED SWITCH


Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-7	White RAL 9016	12	1,085	1006-00
	White+transp.*			1006-01


NORM: PN-EN-60669-1:2006

Switches: 10AX/250V~ screw terminals

Protection degree IP44

Dimension: 65mm x 69mm x 48mm









HERMES 2 IP 44 SOCKET FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9016	12	1,18	1021-00


NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 69mm x 48mm



HERMES 2 IP 44 SOCKET DOUBLE FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9016	12	1,36	1022-00


NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 126 mm x 69 mm x 47mm



HERMES 2 IP 44 3XSOCKET FLAP IN SOCKET COLOR

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	White RAL 9016	4	1,00	1023-00


NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 186 mm x 69 mm x 47mm



HERMES 2 IP 44 SOCKET SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9016	12	1,18	1021-01


NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 69mm x 48mm



HERMES 2 IP 44 SOCKET DOUBLE SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9016	12	1,36	1022-01


NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 126 mm x 69 mm x 47mm



HERMES 2 IP 44 3XSOCKET SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z	White RAL 9016	12	1,00	1023-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 186 mm x 69 mm x 47mm



IP 44 ABS



HERMES 2 IP 44 SOCKET SCHUKO

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9016	12	1,18	1024-00

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65 mm x 69 mm x 47mm




IP 44 ABS



HERMES 2 IP 44 SOCKET DOUBLE SCHUKO

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	White RAL 9016	4	1,36	1025-00

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 126 mm x 69 mm x 47mm




IP 44 ABS



HERMES 2 IP 44 3XSOCKET SCHUKO

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	White RAL 9016	4	1,00	1026-00

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 186 mm x 69 mm x 47mm




IP 44 ABS



HERMES 2 IP 44 SOCKET SCHUKO SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z schuko	White RAL 9016	12	1,18	1024-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 65mm x 69mm x 48mm




IP 44 ABS



HERMES 2 IP 44 SOCKET DOUBLE SCHUKO SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z schuko	White RAL 9016	12	1,36	1025-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 126 mm x 69 mm x 47mm




IP 44 ABS




HERMES 2 IP 44 3XSOCKET SCHUKO SMOKY FLAP

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 3x2P+Z schuko	White RAL 9016	12	1,00	1026-01

NORM: PN-IEC-60884-1:2006
Sockets: 16A/250V~ screw terminals
Protection degree IP44
Dimension: 186 mm x 69 mm x 47mm



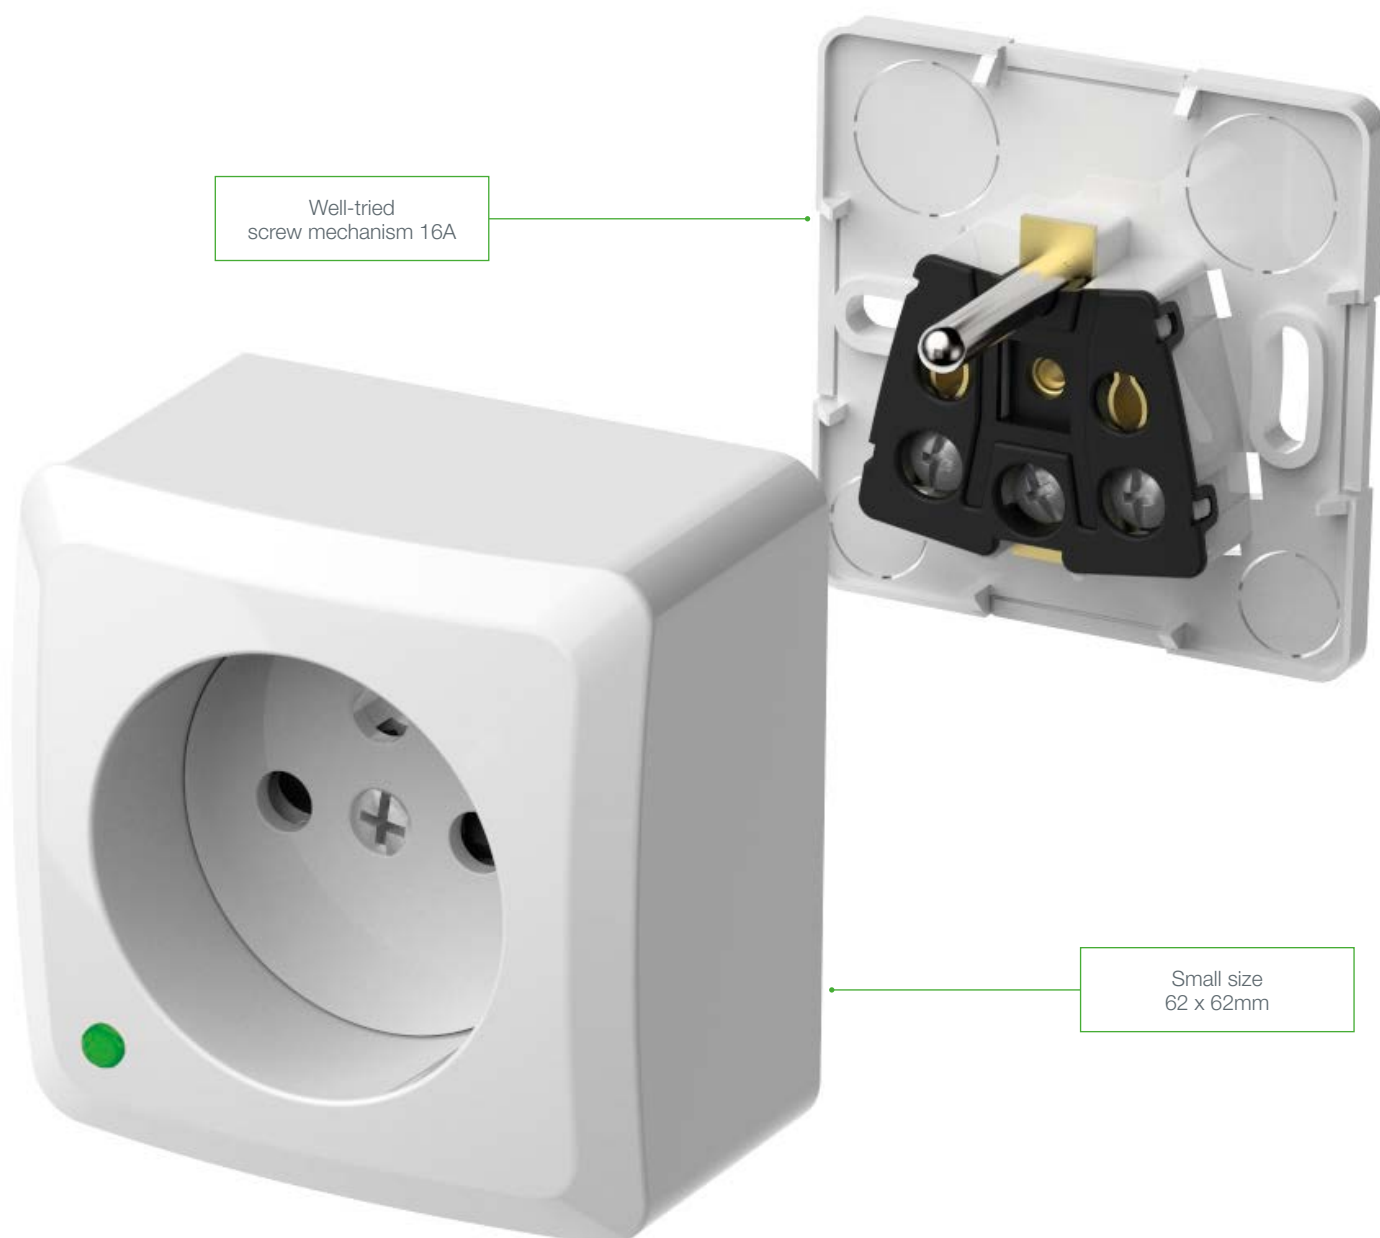

Advantages:

- small size
- high quality plastic > PA <
- screw mechanisms
- 16A sockets
- 10A circuit breakers
- the ability to insert cables from both the bottom and the side
- optional shields of current paths in sockets
- compact design
- extraordinary space for connecting wires
- a minimalist design that fits any interior
- ideal for the modernization of an existing installation

NEW



Surface-mounted series
BERG®


IP 20 PA



BERG SINGLE POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	10	1,085	3710-00

NORM: PN-EN-60884-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG DOUBLE POLE SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-5	White RAL 9003	10	1,085	3711-00

NORM: PN-EN-60884-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG TWO WAY SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-3	White RAL 9003	10	1,085	3712-00

NORM: PN-EN-60884-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG PUSH „LIGHT” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	10	1,085	3713-00

NORM: PN-EN-60884-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG PUSH „BELL” SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	10	1,085	3714-00

NORM: PN-EN-60884-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG CROSSED SWITCH

Typ	Color	Pack. pc.	Weight pc./kg	Index
ŁNT-1	White RAL 9003	10	1,085	3715-00

There is a possibility to order in a keyed version.
NORM: PN-EN-60884-1:2006
Switches: 10AX/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG SINGLE 2P+Z SOCKET

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9003	10	1,085	3733-00

NORM: PN-EN-60884-1:2006
Switches: 16A/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG 2X2P+Z SOCKET

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9003	10	2,24	3743-00

NORM: PN-EN-60884-1:2006
Switches: 16A/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 104 x 40mm




IP 20 PA



BERG SINGLE 2P SOCKET

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P	White RAL 9003	10	2,24	3740-00

NORM: PN-EN-60884-1:2006
Switches: 16A/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 62 x 36mm




IP 20 PA



BERG 2X2P SOCKET

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P	White RAL 9003	10	2,24	3744-00

NORM: PN-EN-60884-1:2006
Switches: 16A/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 104 x 40mm




IP 20 PA



BERG SINGLE SOCKET 2P+Z SCHUKO

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2P+Z	White RAL 9003	10	1,085	3737-00

NORM: PN-EN-60884-1:2006
Switches: 16A/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 62 x 39mm




IP 20 PA




BERG SOCKET 2X2P+Z SCHUKO

Typ	Color	Pack. pc.	Weight pc./kg	Index
GNT 2x2P+Z	White RAL 9003	10	2,24	3738-00

NORM: PN-EN-60884-1:2006
Switches: 16A/250V~ screw terminals
Protection degree IP20
Dimension: 62 x 104 x 43mm



screw mechanisms

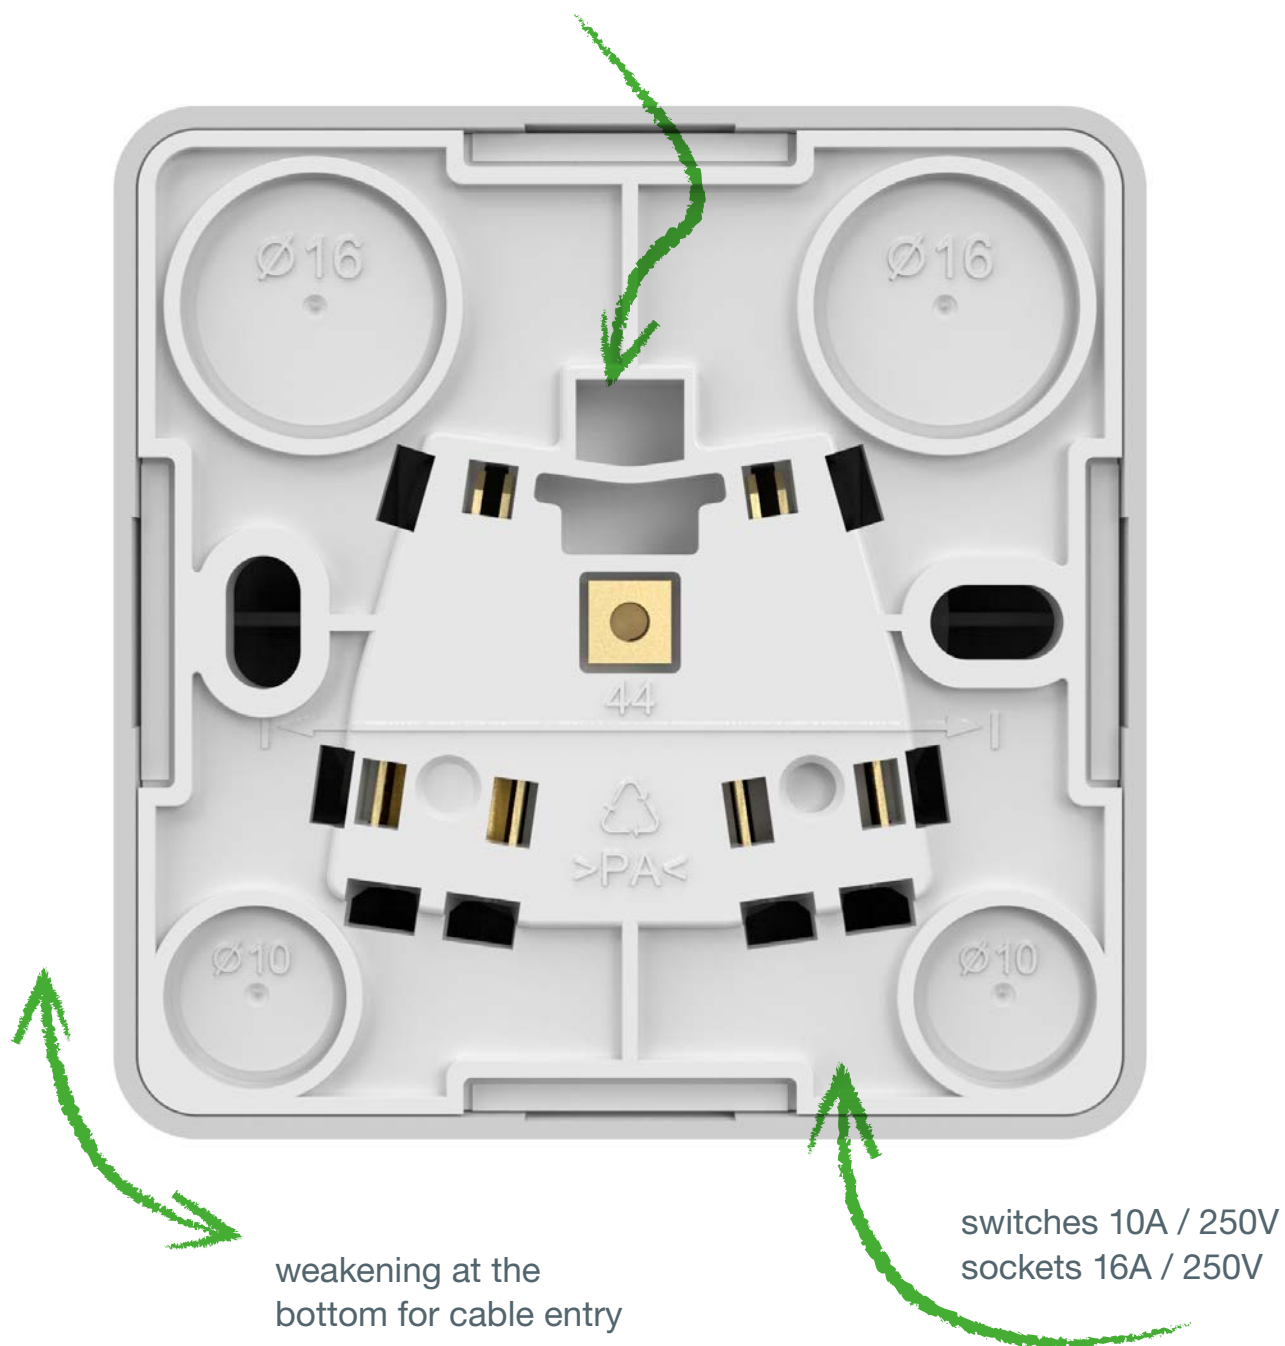




Switches and sockets flush mounted


- ASTORIA • SENTIA • VOLANTE
- LORENTE • CARLA

AVAILABLE COLOURS SWITCHES AND SOCKETS FLUSH MOUNTED


ASTORIA




white




silver



black metallized




gray (frames)




anthracite (frames)


SENTIA



white




silver (acrylic)




black metallized


VOLANTE




white



cream




silver




graphite


LORENTE



white




silver




graphite


CARLA




white




cream



silver



graphite




wenge (frames)

ASTORIA®



GWARANCJA
JAKOŚCI
I CENY

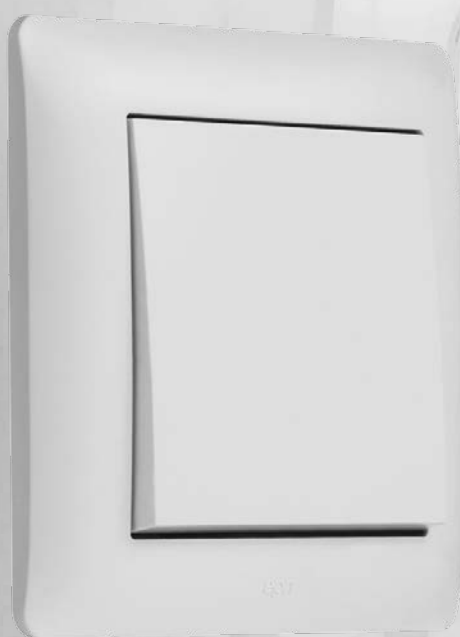

white



silver



black


New light into your residence

New frame serie

This serie is frame system, reliability, functionality and easy to assembly

Serie Astoria available colors:


- white
- silver
- black metallized
- anthracite (frames)
- jasny gray (frames)

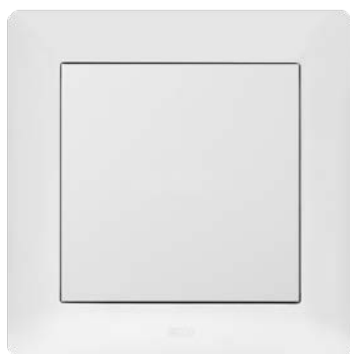

ASTORIA SWITCH FLUSH MOUNTED 1-POLE

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
1PT 1 pole	White	10	1,0	3210-00
	Silver			3210-06
	Black metallized			3210-09


NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

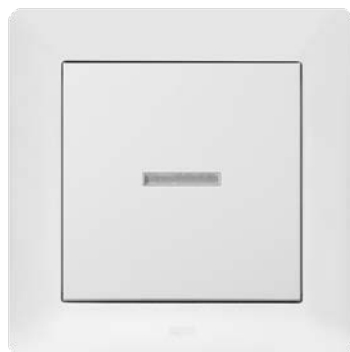

ASTORIA SWITCH FLUSH MOUNTED 1-POLE WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
1PT 1-pole with backlight	White	10	1,0	3223-00
	Silver			3223-06
	Black metallized			3223-09


NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

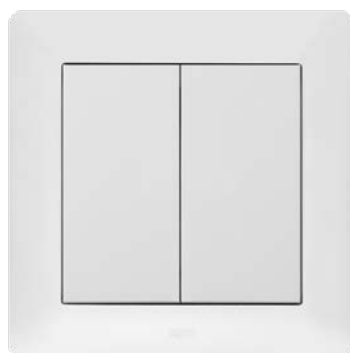

ASTORIA SWITCH FLUSH MOUNTED CANDLESTICK

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
1PT candlestick	White	10	1,0	3211-00
	Silver			3211-06
	Black metallized			3211-09


NORM: PN-EN-60669-1:2006
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

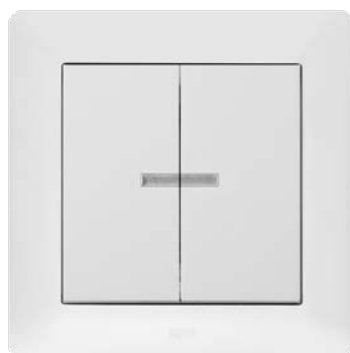

ASTORIA SWITCH FLUSH MOUNTED CANDLESTICK WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
1PT candlestick with backlight	White	10	1,0	3224-00
	Silver			3224-06
	Black metallized			3224-09


NORM: PN-EN-60669-1:2006
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

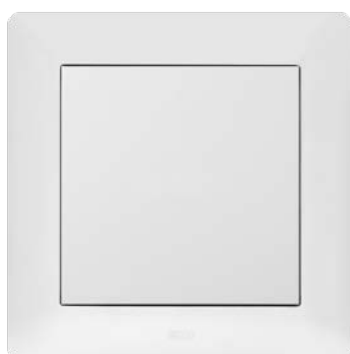

ASTORIA SWITCH FLUSH MOUNTED TWO WAY

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
1PT two way	White	10	1,0	3212-00
	Silver			3212-06
	Black metallized			3212-09


NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

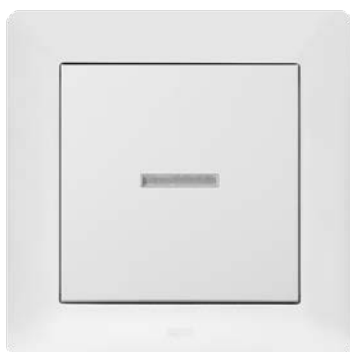

ASTORIA SWITCH FLUSH MOUNTED TWO WAY WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT two way with backlight	White	10	1,0	3225-00
	Silver			3225-06
	Black metallized			3225-09


NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

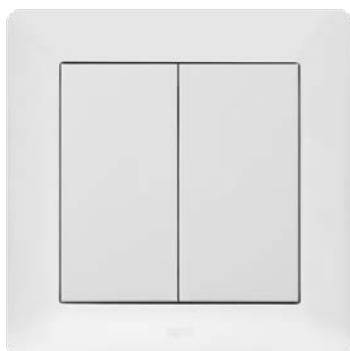

ASTORIA SWITCH FLUSH MOUNTED DOUBLE TWO WAY

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT 2x two way	White	10	0,6	3218-00
	Silver			3218-06
	Black metallized			3218-09


NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

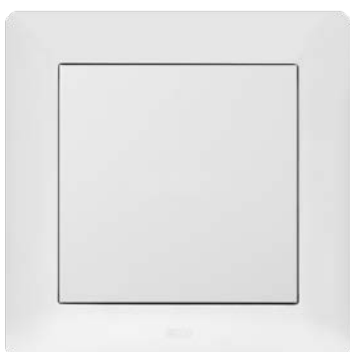

ASTORIA SWITCH FLUSH MOUNTED PUSH „LIGHT”

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „light”	White	10	0,6	3213-00
	Silver			3213-06
	Black metallized			3213-09


NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

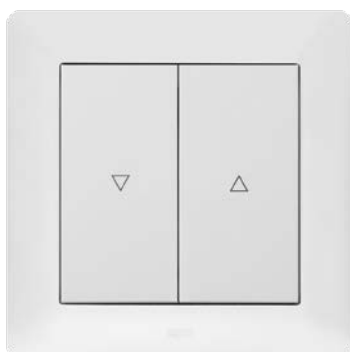

ASTORIA SWITCH FLUSH MOUNTED BLIND

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT blind	White	6	0,6	3216-00
	Silver			3216-06
	Black metallized			3216-09


NORM: PN-EN-60669-1:2006
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

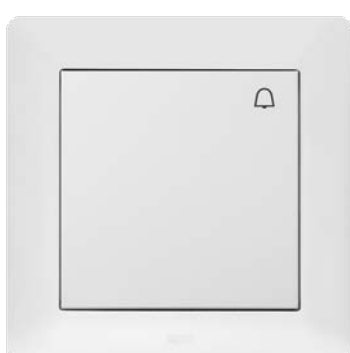

ASTORIA SWITCH FLUSH MOUNTED PUSH „BELL”

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „bell”	White	6	0,6	3214-00
	Silver			3214-06
	Black metallized			3214-09

NORM: PN-EN-60669-1:2006
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

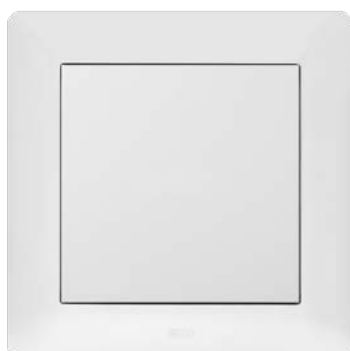

ASTORIA SWITCH FLUSH MOUNTED CROSSED

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT crossed	White	6	0,6	3215-00
	Silver			3215-06
	Black metallized			3215-09

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

LED



ASTORIA DIMMER FOR LED SOURCES

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
SPT Dimmer for LED sources	White	6	0,6	3207-00
	Silver			3207-06
	Black metallized			3207-09

Controlling the brightness of the stream of connected LED sources
NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20. External dimensions with frame: 85 mm x 85 mm



ASTORIA MASK

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
mask	White	6	0,57	3270-10
	Silver			3270-16
	Black metallized			3270-19

NORM: PN-EN-60669-1:2006
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



ASTORIA SOCKET WITH GROUNDING

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z	White	10	1,2	3234-10
	Silver			3234-16
	Black metallized			3234-19

NORM: PN-EN-60669-1:2006
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



ASTORIA SOCKET MODULAR

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P	White	10	1,3	3243-00
	Silver			3243-06
	Black metallized			3243-09

NORM: PN-EN-60669-1:2006
Socket modular for multiple frame.
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



ASTORIA SOCKET DOUBLE WITH GROUNDING

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P+Z	White	10	1,3	3235-00
	Silver			3235-06
	Black metallized			3235-09

NORM: PN-EN-60669-1:2006
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 113 mm



ASTORIA SOCKET WITH GROUNDING IP 44

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z IP 44	White	10	1,3	3236-10
	Silver			3236-16
	Black metallized			3236-19

NORM: PN-IEC 60884-2-2:2012
Sockets: 16A/230V~ screw terminals
Degree of protection IP44
External dimensions with frame: 85 mm x 85 mm

**ASTORIA SOCKET COMPUTER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT RJ 45 5 KAT	White	6	0,6	3248-10
	Silver			3248-16
	Black metallized			3248-19

NORM: PN-IEC 60884-2-2:2012
Sockets: RJ45 5KAT
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**ASTORIA SOCKET DOUBLE COMPUTER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x RJ 45 5 KAT	White	6	0,6	3249-10
	Silver			3249-16
	Black metallized			3249-19

NORM: PN-IEC 60884-2-2:2012
Sockets: RJ45 5KAT
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**ASTORIA SOCKET R-TV -2XSAT TERMINAL**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT RTV – 2xSAT	White	6	0,6	3260-10
	Silver			3260-16
	Black metallized			3260-19

NORM: PN-EN-50083-1:2002
Sockets: R-TV-SAT
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**ASTORIA SOCKET R-TV-SAT TERMINAL**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT R-TV-SAT terminal	White	6	0,6	3253-10
	Silver			3253-16
	Black metallized			3253-19

NORM: PN-EN-50083-1:2002
Sockets: R-TV-SAT
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**ASTORIA SOCKET TV F-F**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT TV F-F	White	6	0,6	3286-10
	Silver			3286-16
	Black metallized			3286-19

NORM: PN-EN-50083-1:2002
Sockets: F-F
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**ASTORIA SOCKET DOUBLE TV F-F**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT TV 2x F-F	White	6	0,6	3287-10
	Silver			3287-16
	Black metallized			3287-19

NORM: PN-EN-50083-1:2002
 Sockets: F-F
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**ASTORIA SOCKET SPEAKER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT speaker	White	6	0,6	3257-10
	Silver			3257-16
	Black metallized			3257-19

NORM: PN-EN-50083-1:2002
 Sockets: speaker
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**ASTORIA SOCKET DOUBLE SPEAKER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x speaker	White	6	0,6	3258-10
	Silver			3258-16
	Black metallized			3258-19

NORM: PN-EN-50083-1:2002
 Sockets: speaker
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**ASTORIA GPT 2P+Z 2xUSB WITH FRAME**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z 2xUSB	White	6	0,6	3288-00
	Silver			3288-06
	Black metallized			3288-09

NORM: PN-IEC 60884-2-2:2012
 Sockets: GPT 2P+Z 2xUSB
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 Socket USB power supply for charging mobile devices smartphone, tablet etc
 External dimensions with frame: 85 mm x 85 mm



ASTORIA UNIVERSAL FRAME SINGLE

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R1	White	50	0,6	3271-00
	Silver			3271-06
	Black metallized			3271-09
	Gray			3271-02
	Anthracite			3271-03

External dimensions with frame: 85 mm x 85 mm



ASTORIA UNIVERSAL FRAME DOUBLE

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R2	White	50	0,6	3272-00
	Silver			3272-06
	Black metallized			3272-09
	Gray			3272-02
	Anthracite			3272-03

External dimensions with frame: 85 mm x 155 mm



ASTORIA UNIVERSAL FRAME TRIPLE

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R3	White	50	0,6	3273-00
	Silver			3273-06
	Black metallized			3273-09
	Gray			3273-02
	Anthracite			3273-03

External dimensions with frame: 85 mm x 240 mm



ASTORIA UNIVERSAL FRAME FOURFOLD

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R4	White	50	0,6	3274-00
	Silver			3274-06
	Black metallized			3274-09
	Gray			3274-02
	Anthracite			3274-03

External dimensions with frame: 85 mm x 300 mm

ASTORIA



silver



black metallized



gray



anthracite

Glass




ASTORIA UNIVERSAL FRAME SINGLE

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R1	Black	50	0,6	3271-61
	White			3271-62
	Silver			3271-63
	Anthracite			3271-72

External dimensions with frame: 85 mm x 85 mm

Glass

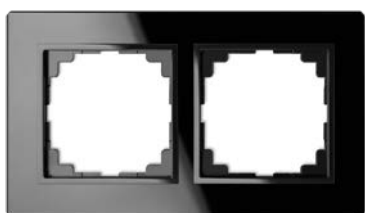

ASTORIA UNIVERSAL FRAME DOUBLE

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R2	Black	50	0,6	3272-61
	White			3272-62
	Silver			3272-63
	Anthracite			3272-72

External dimensions with frame: 85 mm x 155 mm

Glass



ASTORIA UNIVERSAL FRAME TRIPLE

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R3	Black	50	0,6	3273-61
	White			3273-62
	Silver			3273-63
	Anthracite			3273-72

External dimensions with frame: 85 mm x 240 mm

Glass



ASTORIA UNIVERSAL FRAME FOURFOLD

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R4	Black	50	0,6	3274-61
	White			3274-62
	Silver			3274-63
	Anthracite			3274-72

External dimensions with frame: 85 mm x 300 mm


Available colors




black



white



silver



anthracite

**SENTIA SWITCH FLUSH MOUNTED 1-POLE**


Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT-1 pole	White	10	1,0	1410-10
	Silver			1410-56
	Black metallized			1410-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED 1-POLE WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT 1-pole with backlight	White	10	1,0	1423-10
	Silver			1423-56
	Black metallized			1423-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

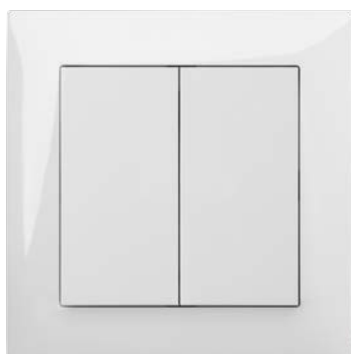**SENTIA SWITCH FLUSH MOUNTED CANDLESTICK**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT candlestick	White	10	1,0	1411-10
	Silver			1411-56
	Black metallized			1411-19

NORM: PN-EN-60669-1:2006
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED CANDLESTICK WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT candlestick with backlight	White	10	1,0	1424-10
	Silver			1424-56
	Black metallized			1424-19

NORM: PN-EN-60669-1:2006
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED TWO WAY**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT two way	White	10	1,0	1412-10
	Silver			1412-56
	Black metallized			1412-19


NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm



SENTIA SWITCH FLUSH MOUNTED TWO WAY WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT two way with backlight	White	10	1,0	1425-10
	Silver			1425-56
	Black metallized			1425-19

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

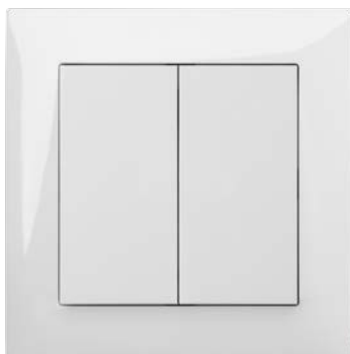

SENTIA SWITCH FLUSH MOUNTED DOUBLE TWO WAY

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT 2x two way	White	6	0,6	1418-10
	Silver			1418-56
	Black metallized			1418-19

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



SENTIA SWITCH FLUSH MOUNTED CROSSED

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT crossed	White	6	0,6	1415-10
	Silver			1415-56
	Black metallized			1415-19

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



SENTIA SWITCH FLUSH MOUNTED CROSSED WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT crossed with backlight	White	6	0,6	1428-10
	Silver			1428-56
	Black metallized			1428-19


NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



SENTIA SWITCH FLUSH MOUNTED 2-POLES (0-1)

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT flush mounted 2-poles (0-1)	White	6	0,6	1419-10
	Silver			1419-56
	Black metallized			1419-19

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

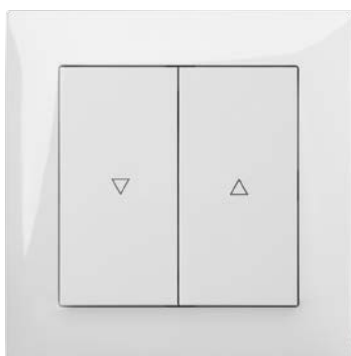**SENTIA SWITCH FLUSH MOUNTED BLIND**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT blind	White	6	0,6	1416-10
	Silver			1416-56
	Black metallized			1416-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED PUSH „BELL”**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT push „bell”	White	6	0,6	1414-10
	Silver			1414-56
	Black metallized			1414-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED PUSH „BELL” WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT push „bell” with backlight	White	6	0,6	1427-10
	Silver			1427-56
	Black metallized			1427-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED PUSH „LIGHT”**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT push „light”	White	6	0,6	1413-10
	Silver			1413-56
	Black metallized			1413-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED PUSH „LIGHT” WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT push „light” with backlight	White	6	0,6	1426-10
	Silver			1426-56
	Black metallized			1426-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED PUSH WITHOUT PICTOGRAM**


Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT-1 push	White	6	0,6	1403-10
	Silver			1403-56
	Black metallized			1403-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED PUSH WITHOUT PICTOGRAM BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT push with backlight	White	6	0,6	1420-10
	Silver			1420-56
	Black metallized			1420-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

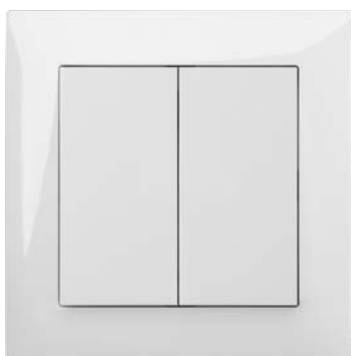**SENTIA SWITCH FLUSH MOUNTED DOUBLE PUSH WITHOUT PICTOGRAM**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT 2x push	White	6	0,6	1401-10
	Silver			1401-56
	Black metallized			1401-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED PUSH „KEY”**


Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT -push klucz	White	6	0,6	1404-10
	Silver			1404-56
	Black metallized			1404-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA ROTARY DIMMER WITH BUTTON OPTION 400 W**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
SPT dimmer 400W	White	6	0,75	1417-10
	Silver			1417-56
	Black metallized			1417-19

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP 20, also available for source versions LED index : 1407-xx
 External dimensions with frame: 85 mm x 85 mm

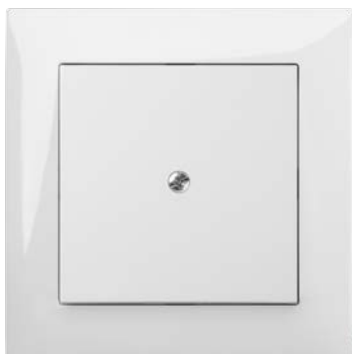**SENTIA MASK**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
Mask	White	6	0,57	1470-10
	Silver			1470-56
	Black metallized			1470-19

NORM: PN-EN-60669-1:2006
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**SENTIA SWITCH FLUSH MOUNTED HOTEL CARD WITH BACKLIGHT (ONLY WHITE COLOR)**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
ŁPT hotelowy	White	6	0,6	1467-10

NORM: PN-EN-60669-1:2006
Switches: 10A/250V-self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**SENTIA A MOTION SENSOR 180° (ONLY WHITE COLOR)**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
motion sensor	White	1	0,13	1463-00

NORM: PN-EN-60669-1:2006
Switches: 10A/250V-self-terminals
Degree of protection IP20
W komplecie ramka
External dimensions with frame: 85 mm x 85 mm

**SENTIA THERMOREGULATOR (ONLY WHITE COLOR)**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Termoregulator	White	1	0,1	1464-00

NORM: PN-EN-60669-1:2006
Switches: 10A/250V-self-terminals
Degree of protection IP20
Frame included
External dimensions with frame: 85 mm x 85 mm

**SENTIA THERMOREGULATOR LCD + SENSOR (ONLY WHITE COLOR)**


Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Termoregulator LCD + sensor	White	1	0,12	1465-00

NORM: PN-EN-60669-1:2006
Switches: 10A/250V-self-terminals
Degree of protection IP20
Frame included
External dimensions with frame: 85 mm x 85 mm

NEW



white

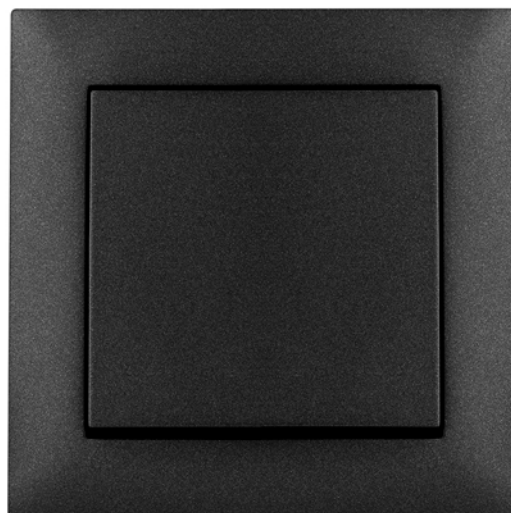

black metallized



silver gloss



czerwony gloss



SENTIA SOCKET WITH GROUNDING

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2P+Z	White	10	1,2	1434-10
	Silver			1434-56
	Black metallized			1434-19

NORM: PN-IEC 60884-2-2:2012
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



SENTIA SOCKET

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2P	White	10	1,2	1440-10
	Silver			1440-56
	Black metallized			1440-19

NORM: PN-IEC 60884-2-2:2012
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



SENTIA SOCKET WITH GROUNDING WITH PRINT „DATA”

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2P+Z	Red	10	1,2	1442-10

NORM: PN-IEC 60884-2-2:2012
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



SENTIA SOCKET WITH GROUNDING 45X45 MM 33° CODED

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2P+Z	Red	10	1,2	1482-10

NORM: PN-IEC 60884-2-2:2012
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
Requires a key index: 148103-00
External dimensions with frame: 85 mm x 85 mm



SENTIA CODED KEY

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
coded key	Black	10		148103-00

NORM: IEC-60669-1:1998, PN-EN-60669-1:2002



SENTIA SOCKET DOUBLE MODULAR WITH GROUNDING

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2x2P+Z	White	10	1,3	1443-10
	Silver			1443-56
	Black metallized			1443-19

NORM: PN-IEC 60884-2-2:2012
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
Socket modular for multiple frame
External dimensions with frame: 85 mm x 85 mm



SENTIA SOCKET DOUBLE MODULAR

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2x2P	White	10	1,3	1444-10
	Silver			1444-56
	Black metallized			1444-19

NORM: PN-IEC 60884-2-2:2012
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
Socket modular for multiple frame
External dimensions with frame: 85 mm x 85 mm



SENTIA SOCKET WITH GROUNDING IP 44 TRANSP.

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2P+Z IP 44	White	10	1,2	1466-10
	Silver			1466-56
	Black metallized			1466-19

NORM: PN-IEC 60884-2-2:2012
Sockets: 16A/230V~ screw terminals
Degree of protection IP44
External dimensions with frame: 85 mm x 85 mm



SENTIA SOCKET WITH GROUNDING IP 44

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2P+Z IP 44	White	10	1,2	1436-10
	Silver			1436-56
	Black metallized			1436-19

NORM: PN-IEC 60884-2-2:2012
Sockets: 16A/230V~ screw terminals
Degree of protection IP44
External dimensions with frame: 85 mm x 85 mm



SENTIA GASKET FOR SWITCH FLUSH MOUNTED AND SOCKETS IP 44

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
gasket	Transparent	10	0,042	143603-00

NORM: PN-EN-60669-1:2006
Degree of protection IP44
External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET WITH GROUNDING SCHUKO**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2P+Z SCHUKO	White	10	1,2	1437-10
	Silver			1437-56
	Black metallized			1437-19

NORM: PN-IEC 60884-2-2:2012
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET DOUBLE WITH GROUNDING SCHUKO**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2x2P+Z SCHUKO	White	10	1,3	1438-00
	Silver			1438-06
	Black metallized			1438-19

NORM: PN-IEC 60884-2-2:2012
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET WITH GROUNDING IP 44 SCHUKO TRANSP.**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2P+Z IP 44 SCHUKO	White	10	1,2	1469-10
	Silver			1469-56
	Black metallized			1469-19

NORM: PN-IEC 60884-2-2:2012
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP44
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET WITH GROUNDING IP 44 SCHUKO**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z IP 44 SCHUKO	White	10	1,2	1439-10
	Silver			1439-56
	Black metallized			1439-19

NORM: PN-IEC 60884-2-2:2012
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP44
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET TELEPHONE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT RJ 11	White	6	0,6	1450-10
	Silver			1450-56
	Black metallized			1450-19

NORM: PN-IEC 60884-2-2:2012
 Sockets: RJ11
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET DOUBLE TELEPHONE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2xRJ 11	White	6	0,6	1451-10
	Silver			1451-56
	Black metallized			1451-19

NORM: PN-IEC 60884-2-2:2012
 Sockets: RJ11
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET COMPUTER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT RJ 45	White	6	0,6	1448-10
	Silver			1448-56
	Black metallized			1448-19

NORM: PN-IEC 60884-2-2:2012
 Sockets: RJ45
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET DOUBLE COMPUTER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2x RJ 45	White	6	0,6	1449-10
	Silver			1449-56
	Black metallized			1449-19

NORM: PN-IEC 60884-2-2:2012
 Sockets: RJ45
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET COMPUTER + TELEPHONE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT RJ 45 + RJ 11	White	6	0,6	1459-10
	Silver			1459-56
	Black metallized			1459-19

NORM: PN-IEC 60884-2-2:2012
 Sockets: RJ45+RJ11
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET TV F-F**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GN TV F-F	White	6	0,6	1486-10
	Silver			1486-56
	Black metallized			1486-19

NORM: PN-EN-50083-1:2002
Sockets: F-F
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET DOUBLE TV F-F**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GN TV 2xF-F	White	6	0,6	1487-10
	Silver			1487-56
	Black metallized			1487-19

NORM: PN-EN-50083-1:2002
Sockets: F-F
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET R-TV -2XSAT TERMINAL**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT RTV – 2xSAT	White	6	0,6	1460-10
	Silver			1460-56
	Black metallized			1460-19

NORM: PN-EN-50083-1:2002
Sockets: R-TV-SAT
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET R-TV-SAT 10 DB**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT R-TV-SAT 10 dB	White	6	0,6	1461-10
	Silver			1461-56
	Black metallized			1461-19

NORM: PN-EN-50083-1:2002
Sockets: R-TV-SAT
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET R-TV-SAT TERMINAL**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT R-TV-SAT terminal	White	6	0,6	1453-10
	Silver			1453-56
	Black metallized			1453-19

NORM: PN-EN-50083-1:2002
Sockets: R-TV-SAT
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET R-TV 10DB, 14DB, 16DB**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames		
				10dB	14dB	16dB
GPT R-TV	White	6	0,7	1454-10	1455-10	1456-10
	Silver			1454-56	1455-56	1456-56
	Black metallized			1454-19	1455-19	1456-19

NORM: PN-EN-50083-1:2002
 Sockets: R-TV
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET R-TV TERMINAL, ENDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames	
				terminal	ending
GPT R-TV	White	6	0,7	1452-10	1462-10
	Silver			1452-56	1462-56
	Black metallized			1452-19	1462-19

NORM: PN-EN-50083-1:2002
 Sockets: R-TV
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET SPEAKER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT speaker	White	6	0,7	1457-10
	Silver			1457-56
	Black metallized			1457-19

NORM: PN-EN-50083-1:2002
 Sockets: speaker
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**SENTIA SOCKET DOUBLE SPEAKER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2x speaker	White	6	0,7	1458-10
	Silver			1458-56
	Black metallized			1458-19

NORM: PN-EN-50083-1:2002
 Sockets: speaker
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

NEW



SENTIA GPT 2P+Z 2XUSB Z/R

Type	Color	Pack. pc.	Weight kg/pack kit.	Index without frames
GPT 2P+Z 2xUSB	White	1	0,6	1488-00
	Silver			1488-06
	Black metallized			1488-09

NORM: PN-IEC 60884-2-2:2012

Sockets: GPT 2P+Z 2xUSB

Sockets: 16A/230V- screw terminals

Degree of protection IP20


Socket USB power supply for charging mobile devices smartphone, tablet etc.

External dimensions with frame: 85 mm x 85 mm

USB power
5V DC
2.1A / socket








SENTIA UNIVERSAL FRAME SINGLE

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R1	White	50	0,6	1471-00
	Silver			1471-56
	Black metallized			1471-09

External dimension: 85x85mm



SENTIA UNIVERSAL FRAME DOUBLE

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R2	White	25	0,6	1472-00
	Silver			1472-56
	Black metallized			1472-09

External dimension: 85x155mm



SENTIA UNIVERSAL FRAME TRIPLE

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R3	White	20	0,62	1473-00
	Silver			1473-56
	Black metallized			1473-09

External dimension: 85x230mm



SENTIA UNIVERSAL FRAME FOURFOLD

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R4	White	15	0,6	1474-00
	Silver			1474-56
	Black metallized			1474-09

External dimension: 85x298mm



SENTIA UNIVERSAL FRAME FIVEFOLD


Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R5	White	10	0,6	1475-00
	Silver			1475-56
	Black metallized			1475-09

External dimension: 85x373mm


SENTIA - FRAMES



1471-00
Frame 1x white



1471-56
Frame 1x silver



1471-09
Frame 1x
black metallized




1471-40
Frame 1x white IP44


Universal system multiple frames

provides various configuration max 5 mod
vertical and horizontal version


- due to symetric construction all frames provides vertical and horizontal assembly
- Sentia serie brings frames from 1 to 5
- each single socket equipped with child protection

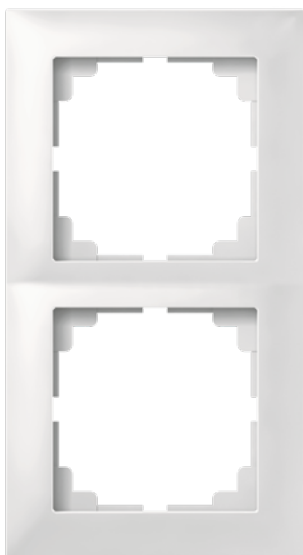


1472-00
Frame 2x
white

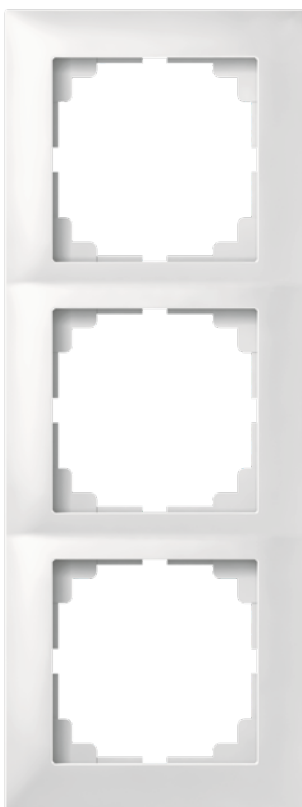

1473-00
Frame 3x
white

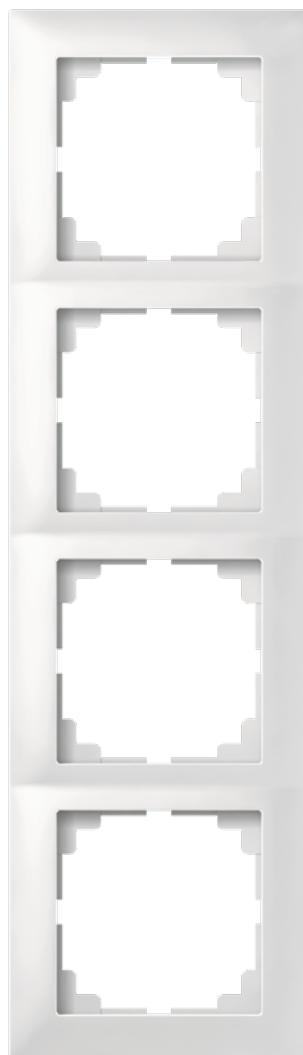

1474-00
Frame 4x
white

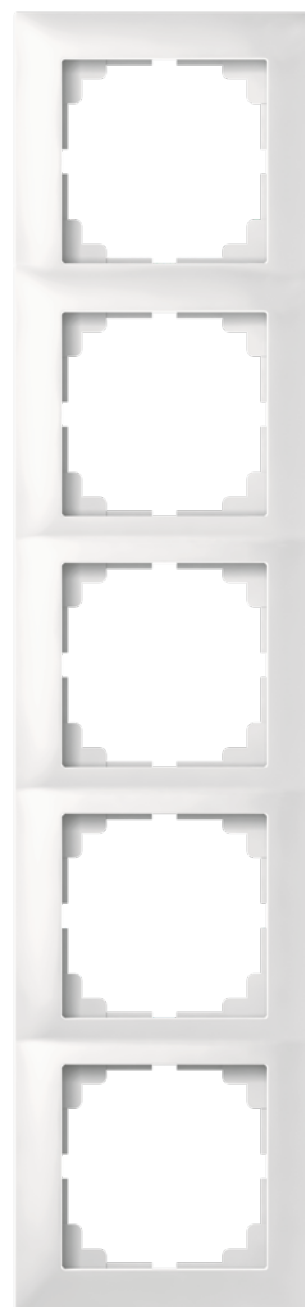

1475-00
Frame 5x
white



**SENTIA ADAPTER SURFACE MOUNTED
MAIN**





Type	Color	Pack. pc.	Waga kg/1 szt.	Index
Adapter n/t	White	10	0,053	1480-10
	Cream			1480-11
	Silver			1480-12

The surface-mounted adapter enables the assembly and extension of wall-mounted electrical installation accessories to the wall version.

**SENTIA ADAPTER SURFACE MOUNTED
EXTENDED**

Type	Color	Pack. pc.	Waga kg/1 szt.	Index
Adapter n/t	White	10	0,04	1480-20
	Cream			1480-21
	Silver			1480-22

Expansion adapter in conjunction with the basic adapter 1480-XX enables the assembly of accessories in multiple frames in any number of modules.



• **SURFACE MOUNTED**



ELEMENTS:

- SWITCH FLUSH MOUNTED 1410-10
- SOCKET 1434-10
- FRAME R2 1472-00
- MAIN ADAPTER 1480-10
- EXTENDED ADAPTER 1480-20



Harmony **style**[™]

Frames **glass**

SENTIA



White



Sea



Limon



Honey



Black



Silver



Design of glass frames SENTIA™

it has been designed to meet the aesthetic requirements and visions of the decorating clients

SENTIA



Glass

SENTIA GLASS FRAME UNIVERSAL SINGLE

Type	Color	Pack. pc. /kg	Weight kg/100 pc.	Index
R1	Glass black	1	0,06	1471-61
	Glass white			1471-62
	Glass silver			1471-63

External dimension: 95x95mm



Glass

SENTIA GLASS FRAME UNIVERSAL DOUBLE

Type	Color	Pack. pc. /kg	Weight kg/100 pc.	Index
R2	Glass black	1	0,01	1472-61
	Glass white			1472-62
	Glass silver			1472-63

External dimension: 95x165mm



Glass

SENTIA GLASS FRAME UNIVERSAL TRIPLE

Type	Color	Pack. pc. /kg	Weight kg/100 pc.	Index
R3	Glass black	1	0,014	1473-61
	Glass white			1473-62
	Glass silver			1473-63

External dimension: 95x230mm



Glass

SENTIA GLASS FRAME UNIVERSAL FOURFOLD

Type	Color	Pack. pc. /kg	Weight kg/100 pc.	Index
R4	Glass black	1	0,014	1474-61
	Glass white			1474-62
	Glass silver			1474-63

External dimension: 95x310mm

- new glass frames are essential aesthetic part electrical switches and sockets
- version metallic double coated paint and acrylic what helps to avoid any scratches
- glass frames makes a suitable harmony to Sentia™ serie due to vertical and horizontal assembly.



White



Silver



Black




Antracyt



FRAME SERIES



Volante

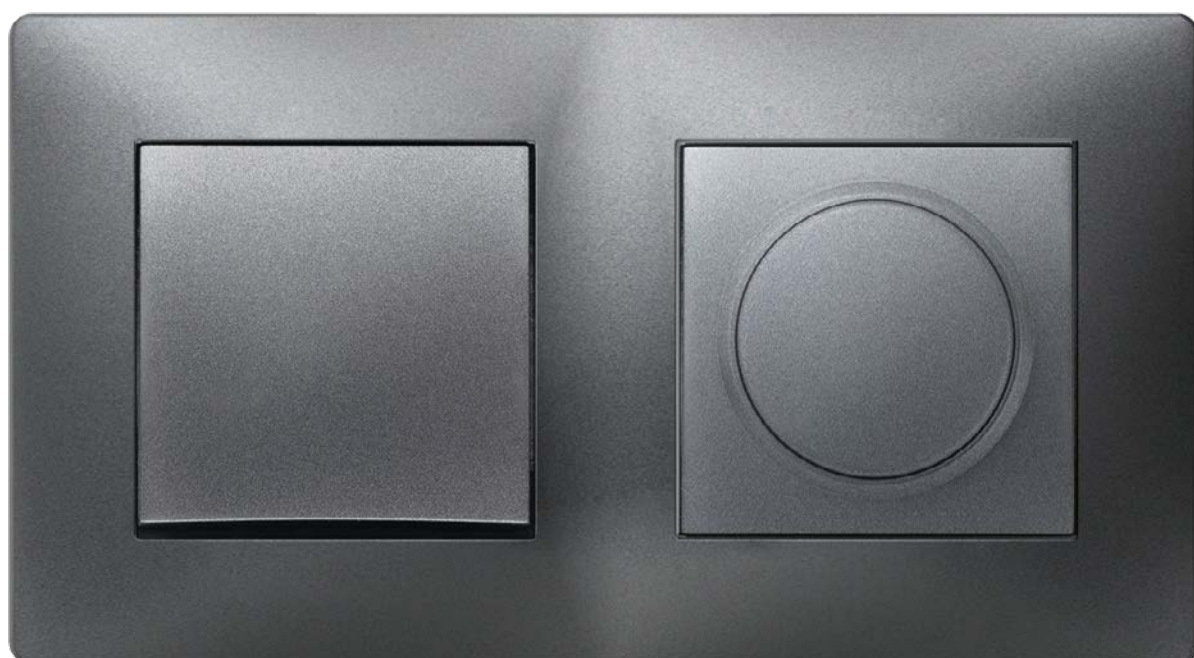


Volante



white



cream

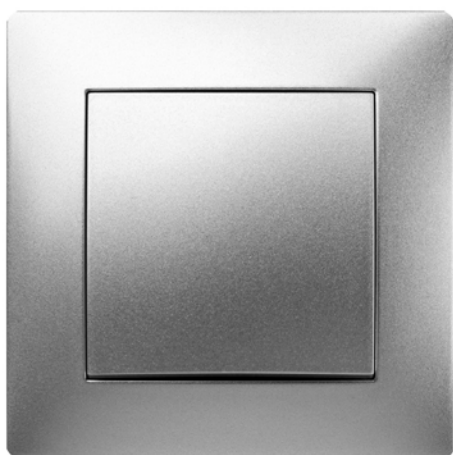

silver



graphite

VOLANTE

Frame Volante:

- WIDE COLOUR PALLET
- DIMMER LED
- FRAMES GLASS
- BACKLIGHT
- FRAME SERIES
- SOCKETS PC, TEL, TV-SAT



**VOLANTE SWITCH FLUSH MOUNTED 1-POLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT-1 pole	White	10	1,0	2610-00
	Cream			2610-01
	Silver			2610-06
	Graphite			2610-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED 1-POLE WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT 1-pole with backlight	White	10	1,0	2623-00
	Cream			2623-01
	Silver			2623-06
	Graphite			2623-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED CANDLESTICK**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT candlestick	White	10	1,0	2611-00
	Cream			2611-01
	Silver			2611-06
	Graphite			2611-08

NORM: PN-EN-60669-1:2006
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED CANDLESTICK WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT candlestick with backlight	White	10	1,0	2624-00
	Cream			2624-01
	Silver			2624-06
	Graphite			2624-08

NORM: PN-EN-60669-1:2006
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED TWO WAY**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT two way	White	10	1,0	2612-00
	Cream			2612-01
	Silver			2612-06
	Graphite			2612-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED TWO WAY WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT two way with backlight	White	10	1,0	2625-00
	Cream			2625-01
	Silver			2625-06
	Graphite			2625-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED DOUBLE TWO WAY**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT 2x two way	White	6	0,6	2618-00
	Cream			2618-01
	Silver			2618-06
	Graphite			2618-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED PUSH „LIGHT”**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „light”	White	6	0,6	2613-00
	Cream			2613-01
	Silver			2613-06
	Graphite			2613-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED PUSH „LIGHT” WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „light” with backlight	White	6	0,6	2626-00
	Cream			2626-01
	Silver			2626-06
	Graphite			2626-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED PUSH „BELL”**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „bell”	White	6	0,6	2614-00
	Cream			2614-01
	Silver			2614-06
	Graphite			2614-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED PUSH „BELL” WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „bell” with backlight	White	6	0,6	2627-00
	Cream			2627-01
	Silver			2627-06
	Graphite			2627-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED CROSSED**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT crossed	White	6	0,6	2615-00
	Cream			2615-01
	Silver			2615-06
	Graphite			2615-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED CROSSED WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT crossed with backlight	White	6	0,6	2628-00
	Cream			2628-01
	Silver			2628-06
	Graphite			2628-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED BLIND**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT blind	White	6	0,6	2616-00
	Cream			2616-01
	Silver			2616-06
	Graphite			2616-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE DIMMER 400 W**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
SPT dimmer 400W	White	6	0,75	2617-00
	Cream			2617-01
	Silver			2617-06
	Graphite			2617-08

NORM: PN-EN-60669-1:2006
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

LED

**VOLANTE DIMMER FOR LED SOURCES**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
SPT dimmer for LED sources	White	6	0,75	2607-00
	Cream			2607-01
	Silver			2607-06
	Graphite			2607-08

Controlling the brightness of the stream of connected LED sources
 NORM: PN-EN-60669-1:2006
 Switches: 10A/250V~self-terminals
 Degree of protection IP20. External dimensions with frame: 86 mm x 86 mm

**VOLANTE BUTTON PUSH**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT-push	White	6	0,57	2603-00
	Cream			2603-01
	Silver			2603-06
	Graphite			2603-08

NORM: PN-EN-60669-1:2006
 Degree of protection IP20
 External dimensions with frame: 86 mm x 86 mm

**VOLANTE SWITCH FLUSH MOUNTED PUSH „KEY”**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT-„KLUCZ”	White	6	0,57	2604-00
	Cream			2604-01
	Silver			2604-06
	Graphite			2604-08

NORM: PN-EN-60669-1:2006
 Degree of protection IP20
 External dimensions with frame: 86 mm x 86 mm

**VOLANTE MASK**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
mask	White	10	0,57	2670-00
	Cream			2670-01
	Silver			2670-06
	Graphite			2670-08

NORM: PN-EN-60669-1:2006
 Degree of protection IP20
 External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET WITH GROUNDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z	White	10	1,2	2633-00
	Cream			2633-01
	Silver			2633-06
	Graphite			2633-08

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P	White	10	1,2	2631-00
	Cream			2631-01
	Silver			2631-06
	Graphite			2631-08

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET MODULAR WITH GROUNDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P+Z	White	10	1,3	2643-00
	Cream			2643-01
	Silver			2643-06
	Graphite			2643-08

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Socket modular for multiple frame.
 Degree of protection IP20
 External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET MODULAR**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P	White	10	1,3	2644-00
	Cream			2644-01
	Silver			2644-06
	Graphite			2644-08

NORM: PN-EN-60669-1:2006
 Socket modular for multiple frame.
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET WITH GROUNDING WITH PRINT „DATA”**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z „DATA”	Red	10	1,2	2642-00

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET WITH GROUNDING SCHUKO**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z schuko	White	10	1,2	2637-00
	Cream			2637-01
	Silver			2637-06
	Graphite			2637-08

NORM: PN-EN-60669-1:2006
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET DOUBLE WITH GROUNDING SCHUKO**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
2xGPT 2P+Z schuko	White	10	1,3	2638-00
	Cream			2638-01
	Silver			2638-06
	Graphite			2638-08

NORM: PN-EN-60669-1:2006
Sockets: 16A/230V~ screw terminals
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET WITH GROUNDING IP44**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z	White	10	1,2	2636-00
	Cream			2636-01
	Silver			2636-06
	Graphite			2636-08

NORM: PN-EN-60669-1:2006
Sockets: 16A/230V~ screw terminals
Degree of protection IP44
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET WITH GROUNDING IP44 TRANSP.**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z	White	10	1,2	2666-00
	Cream			2666-01
	Silver			2666-06
	Graphite			2666-08

NORM: PN-EN-60669-1:2006
Sockets: 16A/230V~ screw terminals
Degree of protection IP44
External dimensions with frame: 86 mm x 86 mm

**VOLANTE GASKET FOR SWITCH FLUSH MOUNTED AND SOCKETS IP44**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
gasket	Transparent	10	0,042	263603-00

NORM: PN-EN-60669-1:2006
Degree of protection IP44
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET TELEPHONE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT RJ11	White	6	0,6	2650-00
	Cream			2650-01
	Silver			2650-06
	Graphite			2650-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET DOUBLE TELEPHONE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2xRJ11	White	6	0,6	2651-00
	Cream			2651-01
	Silver			2651-06
	Graphite			2651-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET COMPUTER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT RJ45	White	6	0,6	2648-00
	Cream			2648-01
	Silver			2648-06
	Graphite			2648-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET DOUBLE COMPUTER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2xRJ45	White	6	0,6	2649-00
	Cream			2649-01
	Silver			2649-06
	Graphite			2649-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET DOUBLE COMPUTER+TELEPHONE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT RJ45 + RJ11	White	6	0,6	2659-00
	Cream			2659-01
	Silver			2659-06
	Graphite			2659-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET TV F-F**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GN TV F-F	White	6	0,6	2686-00
	Cream			2686-01
	Silver			2686-06
	Graphite			2686-08

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET DOUBLE TV F-F**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GN TV 2x F-F	White	6	0,6	2687-00
	Cream			2687-01
	Silver			2687-06
	Graphite			2687-08

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET R-TV 10DB, 14DB, 16DB**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index		
				10dB	14dB	16dB
GPT R-TV	White	6	0,7	2654-00	2655-00	2656-00
	Cream			2654-01	2655-01	2656-01
	Silver			2654-06	2655-06	2656-06
	Graphite			2654-08	2655-08	2656-08

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET R-TV 10DB THROUGH, R-TV-SAT TERMINAL, R-TV 2XSAT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index		
				10dB through	R-TV-SAT terminal	R-TV 2xSAT
GPT R-TV	White	6	0,6	2661-00	2653-00	2660-00
	Cream			2661-01	2653-01	2660-01
	Silver			2661-06	2653-06	2660-06
	Graphite			2661-08	2653-08	2660-08

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET R-TV TERMINAL, RTV ENDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index	
				terminal	ending
GPT R-TV	White	6	0,7	2652-00	2662-00
	Cream			2652-01	2662-01
	Silver			2652-06	2662-06
	Graphite			2652-08	2662-08

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE SOCKET SPEAKER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT speaker	White	6	0,7	2657-00
	Cream			2657-01
	Silver			2657-06
	Graphite			2657-08

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

VOLANTE SOCKET DOUBLE SPEAKER

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2xspeaker	White	6	0,7	2658-00
	Cream			2658-01
	Silver			2658-06
	Graphite			2658-08

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE UNIVERSAL FRAME SINGLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Frame	White	50		2671-00
	Cream			2671-01
	Silver			2671-06
	Graphite			2671-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 86 mm

**VOLANTE UNIVERSAL FRAME DOUBLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Frame double	White	25		2672-00
	Cream			2672-01
	Silver			2672-06
	Graphite			2672-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 158 mm

**VOLANTE UNIVERSAL FRAME TRIPLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Frame triple	White	20		2673-00
	Cream			2673-01
	Silver			2673-06
	Graphite			2673-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 228 mm

**VOLANTE UNIVERSAL FRAME FOURFOLD**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Frame fourfold	White	15		2674-00
	Cream			2674-01
	Silver			2674-06
	Graphite			2674-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 300 mm

**VOLANTE UNIVERSAL FRAME FIVEFOLD**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Frame fivefold	White	5		2675-00
	Cream			2675-01
	Silver			2675-06
	Graphite			2675-08

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 86 mm x 368 mm

Glass

VOLANTE FRAME 1X GLASS



Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Frame 1x	Black	1		2671-61
	White			2671-62
	Strawberry			2671-67

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 95 mm x 95 mm

Glass

VOLANTE FRAME 2X GLASS



Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Frame 2x	Black	1		2672-61
	White			2672-62
	Strawberry			2672-67

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 95 mm x 165 mm

Glass

VOLANTE FRAME 3X GLASS




Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Frame 3x	Black	1		2673-61
	White			2673-62
	Strawberry			2673-67

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 95 mm x 230 mm

epn

SERIA RAMKOWA




Volante


Glass frames multiple universal




Perfection in it's **simplicity**

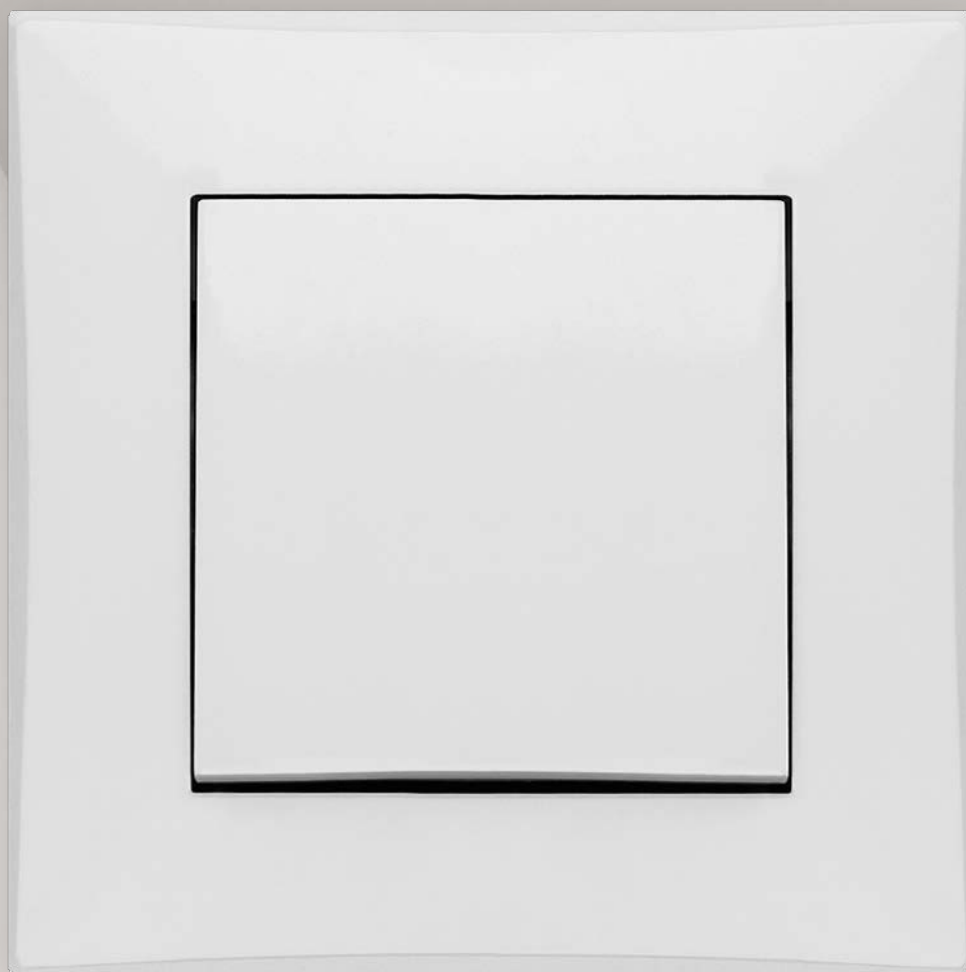


LORENTE®

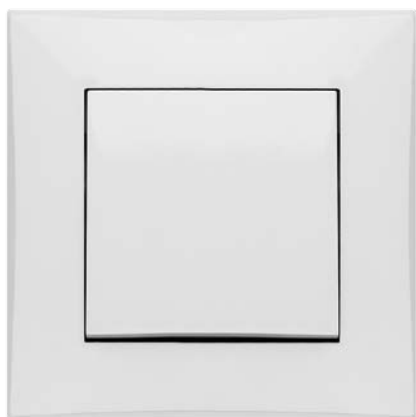

white

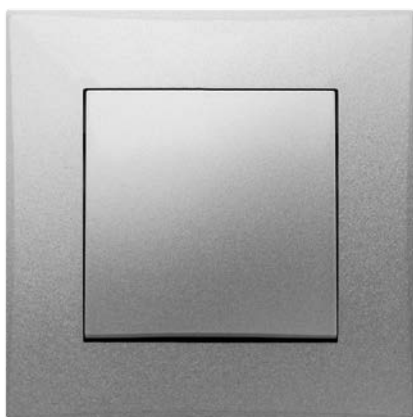

silver

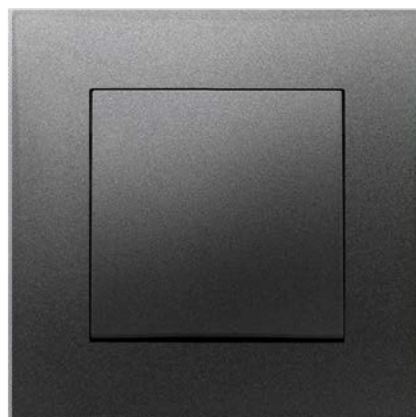


graphite

LORENTE

Frames serie LORENTE

- WIDE COLOURS PALLETE
- DIMMER LED
- FRAMES GLASS
- BACKLIGHT SWITCHES
- FRAME SERIES
- SOCKETS PC, TEL, TV-SAT

**LORENTE SWITCH FLUSH MOUNTED 1-POLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT-1 pole	White	10	1,0	3010-00
	Silver			3010-06
	Graphite			3010-08

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**LORENTE SWITCH FLUSH MOUNTED 1-POLE WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT 1-pole with backlight	White	10	1,0	3023-00
	Silver			3023-06
	Graphite			3023-08

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**LORENTE SWITCH FLUSH MOUNTED CANDLESTICK**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT candlestick	White	10	1,0	3011-00
	Silver			3011-06
	Graphite			3011-08

NORM: PN-EN-60669-1:2006
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**LORENTE SWITCH FLUSH MOUNTED CANDLESTICK WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT candlestick with backlight	White	10	1,0	3024-00
	Silver			3024-06
	Graphite			3024-08

NORM: PN-EN-60669-1:2006
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**LORENTE SWITCH FLUSH MOUNTED TWO WAY**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT two way	White	10	1,0	3012-00
	Silver			3012-06
	Graphite			3012-08

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm



LORENTE SWITCH FLUSH MOUNTED TWO WAY WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT two way with backlight	White	10	1,0	3025-00
	Silver			3025-06
	Graphite			3025-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



LORENTE SWITCH FLUSH MOUNTED DOUBLE TWO WAY

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT 2x two way	White	10	0,6	3018-00
	Silver			3018-06
	Graphite			3018-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



LORENTE SWITCH FLUSH MOUNTED PUSH „LIGHT”

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „light”	White	10	0,6	3013-00
	Silver			3013-06
	Graphite			3013-08


NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



LORENTE SWITCH FLUSH MOUNTED PUSH „LIGHT” WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „light” with backlight	White	10	0,6	3026-00
	Silver			3026-06
	Graphite			3026-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



LORENTE SWITCH FLUSH MOUNTED PUSH „BELL”

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „bell”	White	6	0,6	3014-00
	Silver			3014-06
	Graphite			3014-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



LORENTE SWITCH FLUSH MOUNTED PUSH „BELL” WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „bell” with backlight	White	6	0,6	3027-00
	Silver			3027-06
	Graphite			3027-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



LORENTE SWITCH FLUSH MOUNTED CROSSED

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT crossed	White	6	0,6	3015-00
	Silver			3015-06
	Graphite			3015-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



LORENTE SWITCH FLUSH MOUNTED CROSSED WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT crossed with backlight	White	6	0,6	3028-00
	Silver			3028-06
	Graphite			3028-08

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**LORENTE SOCKET WITH GROUNDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z	White	10	1,2	3033-00
	Silver			3033-06
	Graphite			3033-08

NORM: PN-EN-60669-1:2006
 Degree of protection IP20
 Sockets: 16A/230V~ screw terminals
 External dimensions with frame: 85 mm x 85 mm

**LORENTE SOCKET**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P	White	10	1,2	3031-00
	Silver			3031-06
	Graphite			3031-08

NORM: PN-EN-60669-1:2006
 Degree of protection IP20
 Sockets: 16A/230V~ screw terminals
 External dimensions with frame: 85 mm x 85 mm

IP44

**LORENTE SOCKET WITH GROUNDING IP44**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z	White	10	1,2	3036-00
	Silver			3036-06
	Graphite			3036-08

NORM: PN-EN-60669-1:2006
 Degree of protection IP44
 Sockets: 16A/230V~ screw terminals
 External dimensions with frame: 85 mm x 85 mm

**LORENTE SOCKET DOUBLE MODULAR WITH GROUNDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P+Z	White	10	1,3	3043-00
	Silver			3043-06
	Graphite			3043-08

NORM: PN-EN-60669-1:2006
 Socket modular for multiple frame.
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**LORENTE SOCKET DOUBLE MODULAR WITHOUT GROUNDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P	White	10	1,3	3044-00
	Silver			3044-06
	Graphite			3044-08

NORM: PN-EN-60669-1:2006
 Socket modular for multiple frame.
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**LORENTE SOCKET DOUBLE WITH GROUNDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P+Z	White	10	1,3	3035-00
	Silver			3035-06
	Graphite			3035-08

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 113 mm

**LORENTE SOCKET DOUBLE
BEZ UZIEMIENIA**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P	White	10	1,3	3041-00
	Silver			3041-06
	Graphite			3041-08

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 113 mm

**LORENTE SOCKET TV F-F**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2xTV TYP FF	White	6	0,6	3087-00
	Silver			3087-06
	Graphite			3087-08

NORM: PN-EN-50083-1:2002
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**LORENTE UNIVERSAL FRAME SINGLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
R1	White	6	0,6	3071-00
	Silver			3071-06
	Graphite			3071-08

External dimensions with frame: 85 mm x 85 mm

**LORENTE UNIVERSAL FRAME DOUBLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
R2	White	6	0,6	3072-00
	Silver			3072-06
	Graphite			3072-08

External dimensions with frame: 85 mm x 154 mm


**LORENTE UNIVERSAL FRAME TRIPLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
R3	White	6	0,6	3073-00
	Silver			3073-06
	Graphite			3073-08


External dimensions with frame: 85 mm x 225 mm



white

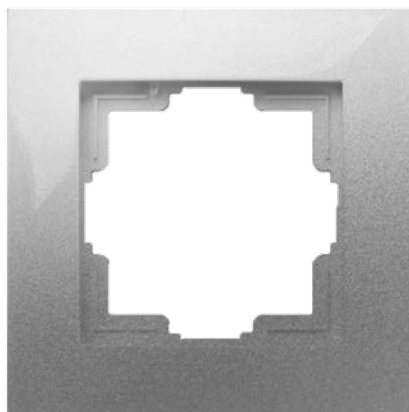

silver

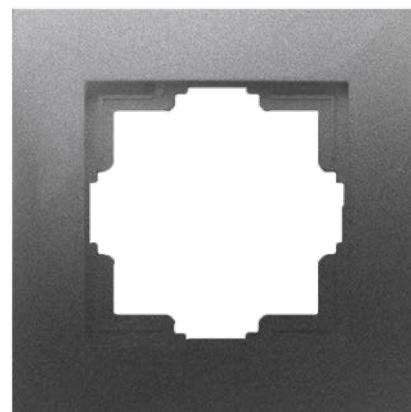

graphite

Universal multiple frames

possible configuration till 3 mod vertical and horizontal

- due to symetric frame construction possible to assembly vertical and horizontal
- Lorente serie brings range 1-3 frames

LORENTE



3071-00
Frame 1x
white



3072-00
Frame 2x
white




3073-00
Frame 3x
white

***ATTENTION** - Product indexes given in the version without a frame.




Residential switches and sockets

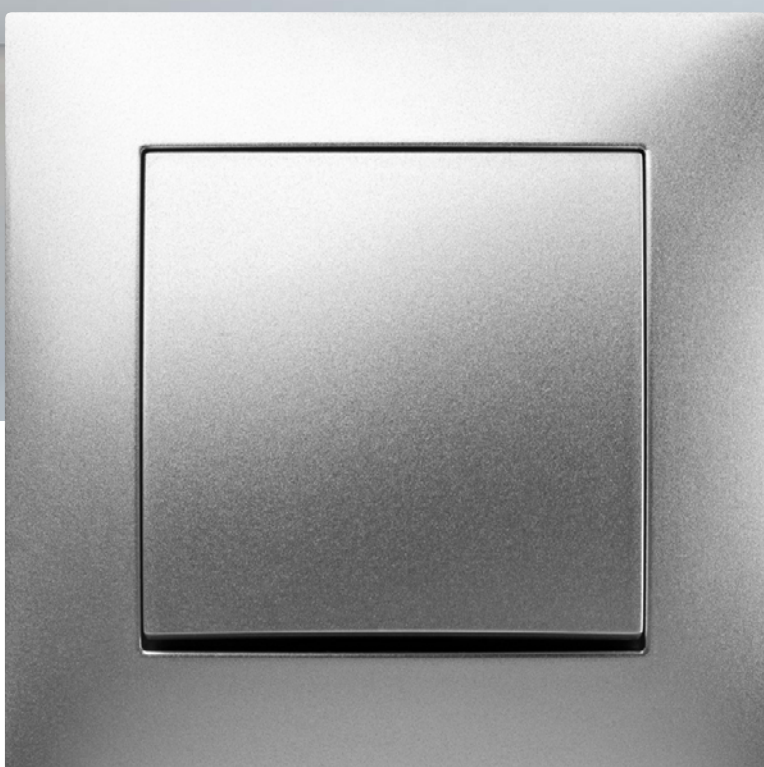




white

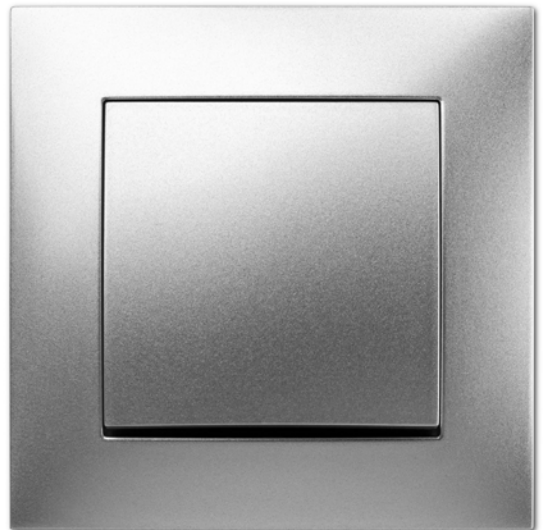

silver

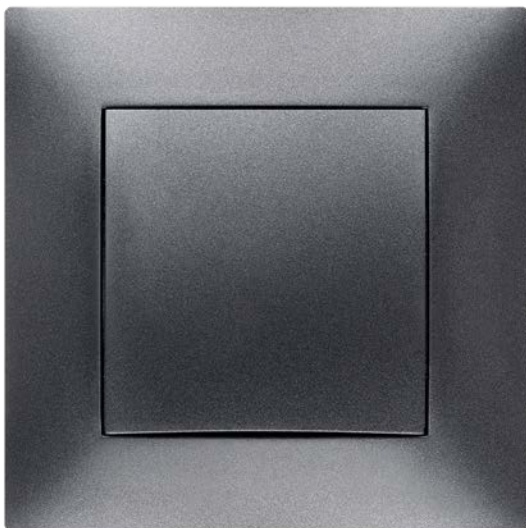

graphite



wenge

CARLA

- FRAME SERIES
- MODERN COLOURS PALLETE
- DIMMER LED
- BACKLIGHT SWITCHES
- SOCKETS PC, TEL, TV-SAT

**CARLA SWITCH FLUSH MOUNTED 1-POLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT-1 pole	White	10	1,0	1710-10
	Cream			1710-11
	Silver			1710-16
	Graphite			1710-18

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

CARLA SWITCH FLUSH MOUNTED 1-POLE WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT 1-pole with backlight	White	10	1,0	1723-10
	Cream			1723-11
	Silver			1723-16
	Graphite			1723-18

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

CARLA SWITCH FLUSH MOUNTED CANDLESTICK

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT candlestick	White	10	1,0	1711-10
	Cream			1711-11
	Silver			1711-16
	Graphite			1711-18

NORM: PN-EN-60669-1:2006
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

CARLA SWITCH FLUSH MOUNTED CANDLESTICK WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT candlestick with backlight	White	10	1,0	1724-10
	Cream			1724-11
	Silver			1724-16
	Graphite			1724-18

NORM: PN-EN-60669-1:2006
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

CARLA SWITCH FLUSH MOUNTED TWO WAY

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT two way	White	10	1,0	1712-10
	Cream			1712-11
	Silver			1712-16
	Graphite			1712-18

NORM: PN-EN-60669-1:2006
 Switching on one light source or one group of light sources
 Switches: 10A/250V~self-terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm





CARLA SWITCH FLUSH MOUNTED TWO WAY WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT two way with backlight	White	10	1,0	1725-10
	Cream			1725-11
	Silver			1725-16
	Graphite			1725-18

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



CARLA SWITCH FLUSH MOUNTED DOUBLE TWO WAY

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT 2x two way	White	10	0,6	1718-10
	Cream			1718-11
	Silver			1718-16
	Graphite			1718-18

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



CARLA SWITCH FLUSH MOUNTED PUSH „LIGHT”

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „light”	White	10	0,6	1713-10
	Cream			1713-11
	Silver			1713-16
	Graphite			1713-18

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



CARLA SWITCH FLUSH MOUNTED PUSH „LIGHT” WITH BACKLIGHT

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „light” with backlight	White	10	0,6	1726-10
	Cream			1726-11
	Silver			1726-16
	Graphite			1726-18

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm



CARLA SWITCH FLUSH MOUNTED PUSH „BELL”

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „bell”	White	10	0,6	1714-10
	Cream			1714-11
	Silver			1714-16
	Graphite			1714-18

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SWITCH FLUSH MOUNTED PUSH „BELL” WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT push „bell” with backlight	White	10	0,6	1727-10
	Cream			1727-11
	Silver			1727-16
	Graphite			1727-18

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SWITCH FLUSH MOUNTED CROSSED**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT crossed	White	10	0,6	1715-10
	Cream			1715-11
	Silver			1715-16
	Graphite			1715-18

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SWITCH FLUSH MOUNTED CROSSED WITH BACKLIGHT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT crossed with backlight	White	10	0,6	1728-10
	Cream			1728-11
	Silver			1728-16
	Graphite			1728-18

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SWITCH FLUSH MOUNTED BLIND**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
ŁPT blind	White	10	0,6	1716-10
	Cream			1716-11
	Silver			1716-16
	Graphite			1716-18

NORM: PN-EN-60669-1:2006
Switching on one light source or one group of light sources
Switches: 10A/250V~self-terminals
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

CARLA

**CARLA DIMMER 400 W**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
SPT dimmer 400W	White	10	0,75	1717-10
	Cream			1717-11
	Silver			1717-16
	Graphite			1717-18

NORM: PN-EN-60669-1:2006
Switches: 10A/250V~self-terminals
Degree of protection IP 20, also available in the LED index 1707-xx version
External dimensions with frame: 85 mm x 85 mm

**CARLA MASK**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
Mask	White	10	0,57	1770-10
	Cream			1770-11
	Silver			1770-16
	Graphite			1770-18

NORM: PN-EN-60669-1:2006
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET WITH GROUNDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z	White	10	1,2	1733-10
	Cream			1733-11
	Silver			1733-16
	Graphite			1733-18

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P	White	10	1,2	1731-10
	Cream			1731-11
	Silver			1731-16
	Graphite			1731-18

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET MODULAR WITH GROUNDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P+Z	White	10	1,3	1743-10
	Cream			1743-11
	Silver			1743-16
	Graphite			1743-18

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Socket modular for multiple frame.
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET MODULAR**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P	White	10	1,3	1744-10
	Cream			1744-11
	Silver			1744-16
	Graphite			1744-18

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Socket modular for multiple frame.
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

CARLA

**CARLA SOCKET WITH GROUNDING WITH PRINT „DATA“**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z „DATA“	Red	10	1,2	1742-10

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET WITH GROUNDING SCHUKO**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z schuko	White	10	1,2	1737-10
	Cream			1737-11
	Silver			1737-16
	Graphite			1737-18

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET DOUBLE WITH GROUNDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P+Z	White	10	1,3	1735-00
	Cream			1735-01
	Silver			1735-06
	Grafit			1735-08

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 113 mm

**CARLA SOCKET DOUBLE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x2P	White	10	1,3	1741-00
	Cream			1741-01
	Silver			1741-06
	Graphite			1741-08

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP20
 External dimensions with frame: 85 mm x 113 mm

**CARLA SOCKET WITH GROUNDING IP44**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z	White	10	1,2	1736-10
	Cream			1736-11
	Silver			1736-16
	Graphite			1736-18

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP44
 External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET WITH GROUNDING IP44 TRANSP.**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2P+Z	White	10	1,2	1766-10
	Cream			1766-11
	Silver			1766-16
	Graphite			1766-08

NORM: PN-EN-60669-1:2006
 Sockets: 16A/230V~ screw terminals
 Degree of protection IP44
 External dimensions with frame: 85 mm x 85 mm

**CARLA GASKET FOR SWITCH FLUSH MOUNTED AND SOCKETS IP44**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GASKET	Transparent	10	0,042	173603-00

NORM: PN-EN-60669-1:2006
Degree of protection IP44
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET TELEPHONE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT RJ11	White	10	0,6	1750-10
	Cream			1750-11
	Silver			1750-16
	Graphite			1750-18

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET DOUBLE TELEPHONE**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2x RJ11	White	10	0,6	1751-10
	Cream			1751-11
	Silver			1751-16
	Graphite			1751-18

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET COMPUTER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT RJ45	White	10	0,6	1748-10
	Cream			1748-11
	Silver			1748-16
	Graphite			1748-18

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET DOUBLE COMPUTER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2xRJ45	White	10	0,6	1749-10
	Cream			1749-11
	Silver			1749-16
	Graphite			1749-18

NORM: PN-IEC 60884-2-2:2012
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET TV F-F**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GN TV F-F	White	10	0,6	1786-10
	Cream			1786-11
	Silver			1786-16
	Graphite			1786-18

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET DOUBLE TV F-F**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GN TV 2x F-F	White	10	0,6	1787-10
	Cream			1787-11
	Silver			1787-16
	Graphite			1787-18

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET R-TV 10DB, 14DB, 16DB**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index		
GPT R-TV	White	10	0,7	10dB	14dB	16dB
	Cream			1754-10	1755-10	1756-10
	Silver			1754-11	1755-11	1756-11
	Graphite			1754-16	1755-16	1756-16
				1754-18	1755-18	1756-18

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET R-TV 10DB THROUGH, R-TV-SAT TERMINAL, R-TV 2XSAT**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index		
GPT R-TV	White	10	0,6	10dB through	R-TV-SAT terminal	R-TV 2xSAT
	Cream			1761-10	1753-10	1760-10
	Silver			1761-11	1753-11	1760-11
	Graphite			1761-16	1753-16	1760-16
				1761-18	1753-18	1760-18

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET R-TV TERMINAL, RTV ENDING**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index	
GPT R-TV	White	10	0,7	terminal	ending
	Cream			1752-10	1762-10
	Silver			1752-11	1762-11
	Graphite			1752-16	1762-16
				1752-18	1762-18

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET SPEAKER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT speaker	White	10	0,7	1757-10
	Cream			1757-11
	Silver			1757-16
	Graphite			1757-18

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA SOCKET DOUBLE SPEAKER**

Type	Color	Pack. pc.	Weight kg/pack kit.	Index
GPT 2xspeaker	White	10	0,7	1758-10
	Cream			1758-11
	Silver			1758-16
	Graphite			1758-18

NORM: PN-EN-50083-1:2002
Degree of protection IP20
External dimensions with frame: 85 mm x 85 mm

**CARLA UNIVERSAL FRAME SINGLE**

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R1	White	50	0,72	1771-00
	Cream			1771-01
	Silver			1771-06
	Wenge			1771-34
	Graphite			1771-08

**CARLA UNIVERSAL FRAME DOUBLE**

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R2	White	25	0,6	1772-00
	Cream			1772-01
	Silver			1772-06
	Wenge			1772-34
	Graphite			1772-08

**CARLA UNIVERSAL FRAME TRIPLE**

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R3	White	20	0,7	1773-00
	Cream			1773-01
	Silver			1773-06
	Wenge			1773-34
	Graphite			1773-08

**CARLA UNIVERSAL FRAME FOURFOLD**

Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R4	White	15	0,7	1774-00
	Cream			1774-01
	Silver			1774-06
	Wenge			1774-34
	Graphite			1774-08

**CARLA UNIVERSAL FRAME FIVEFOLD**


Type	Color	Pack. pc.	Weight kg/100 pc.	Index
R5	White	10	0,6	1775-00
	Cream			1775-01
	Silver			1775-06
	Wenge			1775-34
	Graphite			1775-08



white



cream



silver



wenge

Universal multiple frames

possible configuration till 3 mod vertical and horizontal

- its symmetry allows all frames of CARLA series can be installed vertically and horizontally
- Carla frames from single to fivefold
- For the sake of the youngest, some of the individual socket outlets are childproof.



85 x 85 mm

1771-00
Frame 1x
white



85 x 154 mm

1772-00
Frame 2x
white



85 x 225 mm

1773-00
Frame 3x
white



85 x 296 mm

1774-00
Frame 4x
white



85 x 367 mm

1775-00
Frame 5x
white

INDEX LIST

1

0101-00	112
0102-00	112
0103-00	112
0109-00	112
0111-00	113
0112-00	113
0113-00	113
0201-00	127
0201-0N	129
0202-02	134
0204-00	127
0204-0N	129
0206-50	131
0206-51	131
0209-00	127
0209-0N	129
0210-00	128
0210-0N	130
0211-00	145
0212-00	145
0213-00	145
0214-00	145
0220-00	127
0220-0N	129
0221-00	139
0221-04	139
0222-00	139
0222-04	139
0223-00	139
0223-04	139
0224-00	139
0224-04	139
0225-00	145
0226-00	146
0226-01	146
0226-02	146
0226-04	146
0226-05	146
0226-10	146
0226-11	146
0226-41	146
0226-60	146
0226-61	146
0227-00	141
0227-04	141
0227-10	141
0227-14	141
0228-00	141
0228-04	141

2

0228-10	141
0228-14	141
0229-00	147
0230-00	147
0231-00	142
0231-04	142
0232-00	142
0232-04	142
0233-00	140
0233-01	140
0233-02	140
0233-14	140
0233-24	140
0234-00	128
0234-0N	130
0235-00	128
0235-0N	130
0236-00	145
0236-02	145
0237-00	127
0238-01	141
0238-14	141
0240-00	138
0240-04	138
0241-00	138
0241-04	138
0242-00	138
0242-04	138
0242-10	138
0242-14	138
0243-00	138
0243-04	138
0243-10	142
0244-00	142
0245-00	138
0245-04	138
0250-00	139
0250-04	139
0251-00	140
0251-04	140
0252-00	140
0252-04	140
0253-00	142
0253-10	147
0253-20	147
0253-30	142
0260-00	136
0260-0N	136
0260-01	136

3

0260-03	81
0261-00	136
0261-0N	136
0261-01	136
0262-00	136
0262-0N	136
0262-01	136
0263-01	137
0264-01	137
0265-01	137
0266-00	137
0267-01	137
0281-00	131
0281-01	131
0282-00	131
0283-00	131
0284-00	132
0284-01	132
0285-00	132
0285-01	132
0286-00	128
0286-0N	130
0287-00	128
0287-0N	130
0288-00	128
0288-0N	130
0290-00	143
0290-01	143
0290-04	143
0290-06	143
0290-41	143
0290-61	143
0290-80	143
0290-81	143
0295-00	144
0296-00	144
0297-00	144
0321-01	204
0321-02	205
0321-05	206
0321-06	207
0322-01	204
0322-02	205
0322-05	206
0322-06	207
0323-01	204
0323-02	205
0323-05	206
0323-06	207

4

0324-01	208
0324-02	209
0324-05	210
0324-06	211
0325-01	208
0325-02	209
0325-05	210
0325-06	211
0326-01	208
0326-02	209
0326-05	210
0326-06	211
0327-11	212
0327-12	212
0327-13	212
0327-14	212
0327-21	212
0331-02	200
0331-06	202
0332-02	200
0332-06	202
0333-02	200
0333-06	202
0336-02	200
0336-06	202
0337-02	200
0337-06	202
0338-02	201
0338-06	203
0340-02	201
0341-02	201
0341-06	203
0347-02	201
0347-06	203
0606-00	44
0606-01	44
0608-00	44
0608-01	44
0610-00	44
0610-01	44
0614-00	44
0614-01	44
0640-00	44
0640-01	44
0680-00	48
0680-01	48
0681-00	48
0681-01	48
0682-00	48

5

0682-01	48
0684-00	48
0684-01	48
0685-00	48
0685-01	48
0688-00	58
0688-01	58
0688-02	58
0689-00	58
0689-01	58
0689-02	58
0690-00	58
0690-01	58
0690-02	58
0691-00	58
0691-02	58
0692-00	58
0692-01	58
0692-02	58
0920-00	116
0920-01	116
0921-00	116
0921-01	116
0922-00	116
0922-01	116
0924-00	116
0924-01	116
0930-00	179
0931-00	179
0932-00	179
0933-00	179
0934-00	179
0940-00	178
0940-01	178
0940-02	178
0940-03	178
0940-04	178
0951-00	177
0952-00	177
0953-00	177
0961-00	178
0962-00	178
0963-00	178
0965-00	177
0966-00	178
1001-00	213
1001-01	213
1002-00	213
1002-01	213

6

1003-00	213
1003-01	213
1004-00	213
1004-01	213
1005-00	213
1005-01	213
1006-00	213
1006-01	213
1021-00	214
1021-01	214
1022-00	214
1022-01	214
1023-00	214
1023-01	214
1024-00	215
1024-01	215
1025-00	215
1025-01	215
1026-00	215
1026-01	215
1201-10	184
1201-65	190
1202-10	184
1202-65	190
1203-10	184
1203-65	190
1204-10	184
1204-65	190
1205-10	184
1205-65	190
1206-10	185
1206-65	191
1207-10	185
1207-65	191
1208-10	185
1208-65	191
1241-10	187
1241-65	192
1242-10	187
1242-65	192
1243-10	187
1243-65	192
1244-10	188
1244-65	193
1245-10	188
1245-65	193
1246-10	188
1246-65	193
1247-10	189

INDEX LIST

7

1247-65	192
1249-10	189
1252-10	187
1252-65	192
1254-10	188
1254-65	193
1256-10	189
1256-65	192
1262-10	189
1280-10	189
1281-10	189
1401-10	237
1401-19	237
1401-56	237
1403-10	237
1403-19	237
1403-56	237
1404-10	237
1404-19	237
1404-56	237
1410-10	234, 250
1410-19	234
1410-56	234
1411-10	234
1411-19	234
1411-56	234
1412-10	234
1412-19	234
1412-56	234
1413-10	236
1413-19	236
1413-56	236
1414-10	236
1414-19	236
1414-56	236
1415-10	235
1415-19	235
1415-56	235
1416-10	236
1416-19	236
1416-56	236
1417-10	237
1417-19	237
1417-56	237
1418-10	235
1418-19	235
1418-56	235
1419-10	235
1419-19	235

8

1419-56	235
1420-10	237
1420-19	237
1420-56	237
1423-10	234
1423-19	234
1423-56	234
1424-10	234
1424-19	234
1424-56	234
1425-10	235
1425-19	235
1425-56	235
1426-10	236
1426-19	236
1426-56	236
1427-10	236
1427-19	236
1427-56	236
1428-10	235
1428-19	235
1428-56	235
1434-10	240, 250
1434-19	240
1434-56	240
1436-10	241
1436-19	241
1436-56	241
1437-10	242
1437-19	242
1437-56	242
1438-00	242
1438-19	242
1438-56	242
1439-10	242
1439-19	242
1439-56	242
1440-10	240
1440-19	240
1440-56	240
1442-10	240
1443-10	241
1443-19	241
1443-56	241
1444-10	241
1444-19	241
1444-56	241
1448-10	243
1448-19	243

9

1448-56	243
1449-10	243
1449-19	243
1449-56	243
1450-10	243
1450-19	243
1450-56	243
1451-10	243
1451-19	243
1451-56	243
1452-10	245
1452-19	245
1452-56	245
1453-10	244
1453-19	244
1453-56	244
1454-10	245
1454-19	245
1454-56	245
1455-10	245
1455-19	245
1455-56	245
1456-10	245
1456-19	245
1456-56	245
1457-10	245
1457-19	245
1457-56	245
1458-10	245
1458-19	245
1458-56	245
1459-10	243
1459-19	243
1459-56	243
1460-10	244
1460-19	244
1460-56	244
1461-10	244
1461-19	244
1461-56	244
1462-10	245
1462-19	245
1462-56	245
1463-00	238
1464-00	238
1465-00	238
1466-10	241
1466-19	241
1466-56	241

10

1467-10	238
1469-10	242
1469-19	242
1469-56	242
1470-10	238
1470-19	238
1470-56	238
1471-00	248
1471-09	248
1471-56	248
1471-61	252
1471-62	252
1471-63	252
1472-00	248, 250
1472-09	248
1472-56	248
1472-61	252
1472-62	252
1472-63	252
1473-00	248
1473-09	248
1473-56	248
1473-61	252
1473-62	252
1473-63	252
1474-00	248
1474-09	248
1474-56	248
1474-61	252
1474-62	252
1474-63	252
1475-00	248
1475-09	248
1475-56	248
1480-10	250
1480-11	250
1480-12	250
1480-20	250
1480-21	250
1480-22	250
1482-10	240
1486-10	244
1486-19	244
1486-56	244
1487-10	244
1487-19	244
1487-56	244
1488-00	246
1488-06	246

11

1488-09	246
1600-01	80
1601-01	80
1602-01	80
1603-01	80
1604-01	81
1605-01	80
1606-01	81
1607-01	80
1608-01	81
1609-01	81
1710-08	280
1710-10	280
1710-11	280
1710-16	280
1710-18	280
1711-08	280
1711-10	280
1711-11	280
1711-16	280
1711-18	280
1712-08	280
1712-10	280
1712-11	280
1712-16	280
1712-18	280
1713-08	281
1713-10	281
1713-11	281
1713-16	281
1713-18	281
1714-08	281
1714-10	281
1714-11	281
1714-16	281
1714-18	281
1715-08	282
1715-10	282
1715-11	282
1715-16	282
1715-18	282
1716-08	282
1716-10	282
1716-11	282
1716-16	282
1716-18	282
1717-08	282
1717-10	282
1717-11	282

12

1717-16	282
1717-18	282
1718-08	281
1718-10	281
1718-11	281
1718-16	281
1718-18	281
1723-08	280
1723-10	280
1723-11	280
1723-16	280
1723-18	280
1724-10	280
1724-11	280
1724-16	280
1724-18	280
1725-08	281
1725-10	281
1725-11	281
1725-16	281
1725-18	281
1726-08	281
1726-10	281
1726-11	281
1726-16	281
1726-18	281
1727-08	282
1727-10	282
1727-11	282
1727-16	282
1727-18	282
1728-08	282
1728-10	282
1728-11	282
1728-16	282
1728-18	282
1731-08	284
1731-10	284
1731-11	284
1731-16	284
1731-18	284
1733-08	284
1733-10	284
1733-11	284
1733-16	284
1733-18	284
1735-08	285
1735-10	285
1735-11	285

INDEX LIST

13

1735-16	285
1736-08	285
1736-10	285
1736-11	285
1736-16	285
1736-18	285
1737-08	285
1737-10	285
1737-11	285
1737-16	285
1737-18	285
1741-08	285
1741-10	285
1741-11	285
1741-16	285
1742-10	284
1743-08	284
1743-10	284
1743-11	284
1743-16	284
1743-18	284
1744-08	284
1744-10	284
1744-11	284
1744-16	284
1744-18	284
1748-08	286
1748-10	286
1748-11	286
1748-16	286
1748-18	286
1749-08	286
1749-10	286
1749-11	286
1749-16	286
1749-18	286
1750-08	286
1750-10	286
1750-11	286
1750-16	286
1750-18	286
1751-08	286
1751-10	286
1751-11	286
1751-16	286
1751-18	286
1752-08	287
1752-10	287
1752-11	287

14

1752-16	287
1752-18	287
1753-08	287
1753-10	287
1753-11	287
1753-16	287
1753-18	287
1754-08	287
1754-10	287
1754-11	287
1754-16	287
1754-18	287
1755-08	287
1755-10	287
1755-11	287
1755-16	287
1755-18	287
1756-08	287
1756-10	287
1756-11	287
1756-16	287
1756-18	287
1757-08	288
1757-10	288
1757-11	288
1757-16	288
1757-18	288
1758-08	288
1758-10	288
1758-11	288
1758-16	288
1758-18	288
1760-08	287
1760-10	287
1760-11	287
1760-16	287
1760-18	287
1761-08	287
1761-10	287
1761-11	287
1761-16	287
1761-18	287
1762-08	287
1762-10	287
1762-11	287
1762-16	287
1762-18	287
1766-08	285
1766-10	285

15

1766-11	285
1766-16	285
1770-08	283
1770-10	283
1770-11	283
1770-16	283
1770-18	283
1771-00	288
1771-01	288
1771-06	288
1771-08	288
1771-34	288
1772-00	288
1772-01	288
1772-06	288
1772-08	288
1772-34	288
1773-00	288
1773-01	288
1773-06	288
1773-08	288
1773-34	288
1774-00	288
1774-01	288
1774-06	288
1774-08	288
1774-34	288
1775-00	288
1775-01	288
1775-06	288
1775-08	288
1775-34	288
1786-08	287
1786-10	287
1786-11	287
1786-16	287
1786-18	287
1787-08	287
1787-10	287
1787-11	287
1787-16	287
1787-18	287
1800	120
1800-00	120
1801	120
1801-00	120
1802-01	119
1803-00	119
1804-00	119

16

1806-01	119
1807	120
1807-00	120
1809	120
1809-00	120
1810	120
1810-01	120
1811-01	119
1812-00	119
1813-01	119
1820-00	120
1851-00	110
1852-00	110
1853-00	110
1854-00	110
1855-00	110
1856-00	110
1951-01	74
1952-01	74
1953-01	74
1954-01	75
1955-01	76
1956-01	75
1958-01	75
1959-01	76
1960-01	74
1961-01	74
1962-01	76
1963-01	76
1964-01	76
2000-00	28
2000-01	28
2000-02	28
2000-03	28
2000-04	28
2000-05	28
2000-06	30
2000-07	30
2000-08	30
2000-10	28
2000-11	28
2000-12	28
2000-13	28
2000-14	28
2000-15	28
2000-16	30
2000-17	30
2000-18	30
2000-19	30

17

2000-20	30
2000-21	30
2000-22	30
2000-23	30
2000-24	33
2000-25	33
2000-26	33
2000-27	29
2000-29	33
2000-30	33
2000-31	33
2000-32	29
2000-33	29
2000-34	29
2000-42	54, 67
2000-48	28
2001-00	16, 19
2001-11	17, 24
2002-00	16, 19
2002-11	17, 24
2003-00	16, 19
2003-11	17, 24
2004-00	16, 20
2004-11	17, 25
2005-00	16, 17, 20
2005-11	25
2011-00	16, 21
2011-11	17, 26
2012-00	16, 21
2012-11	17, 26
2012-12	27
2013-00	16, 21
2013-11	17, 26
2014-00	16, 21
2014-11	17, 26
2015-01	23
2015-02	17, 23
2015-03	23
2015-10	22
2015-20	22
2015-30	22
2201-01	84, 86
2202-01	84, 86
2203-01	86
2204-01	87
2205-01	88
2206-01	88
2207-01	87
2208-01	87

18

2209-01	88
2214-01	89
2217-01	89
2217-21	89
2219-01	90
2224-01	89
2227-01	90
2227-21	90
2229-21	90
2237-01	90
2247-01	90
2302-00	12
2302-01	10
2302-01	13
2303-00	12
2303-01	10, 13
2303-10	12
2304-00	12
2304-01	10, 13
2304-10	12
2304-11	13
2305-00	12
2305-01	10, 13
2305-10	12
2305-11	13
2306-01	10, 13
2306-10	13
2306-11	13
2342-00	12
2344-00	10, 12
2351-00	58
2351-01	58
2351-02	58
2352-00	58
2352-01	58
2352-02	58
2353-00	58
2353-01	58
2353-02	58
2354-00	58
2354-01	58
2354-02	58
2355-00	58
2355-01	58
2355-02	58
2401-01	62
2402-01	62
2402-03	68
2402-05	68

INDEX LIST

19

2402-07	68
2403-00	62
2403-01	62
2403-03	68
2403-05	68
2403-07	68
2404-00	62
2404-01	62
2405-00	63
2405-01	63
2406-00	63
2406-01	63
2407-00	63
2407-01	63
2408-00	63
2408-01	63
2411-01	69
2412-01	69
2413-00	69
2413-01	69
2414-00	69
2414-01	69
2415-00	70
2415-01	70
2416-00	70
2416-01	70
2417-00	70
2417-01	70
2423-00	62
2425-00	60, 65
2425-01	60, 65
2425-20	60, 65
2425-21	60, 65
2425-26	67
2425-28	67
2425-31	67
2425-35	67
2425-46	67
2435-00	60, 66
2435-01	60, 66
2435-20	60, 66
2435-21	60, 66
2501-00	44
2501-01	44
2502-00	44
2502-01	44
2503-00	44
2503-01	44
2505-00	44

20

2505-01	44
2505-20	45
2505-21	45
2506-00	44
2506-01	44
2506-20	45
2506-21	45
2511-00	48
2511-01	48
2512-00	48
2512-01	48
2513-00	48
2513-01	48
2515-00	48
2515-01	48
2516-00	48
2516-01	48
2603-00	259
2603-01	259
2603-06	259
2603-08	259
2604-00	259
2604-01	259
2604-06	259
2604-08	259
2607-00	259
2607-01	259
2607-06	259
2607-08	259
2610-00	256
2610-01	256
2610-06	256
2610-08	256
2611-00	256
2611-01	256
2611-06	256
2611-08	256
2612-00	256
2612-01	256
2612-06	256
2612-08	256
2613-00	257
2613-01	257
2613-06	257
2613-08	257
2614-00	257
2614-01	257
2614-06	257
2614-08	257

21

2615-00	258
2615-01	258
2615-06	258
2615-08	258
2616-00	258
2616-01	258
2616-06	258
2616-08	258
2617-00	258
2617-01	258
2617-06	258
2617-08	258
2618-00	257
2618-01	257
2618-06	257
2618-08	257
2623-00	256
2623-01	256
2623-06	256
2623-08	256
2624-00	256
2624-01	256
2624-06	256
2624-08	256
2625-00	257
2625-01	257
2625-06	257
2625-08	257
2626-00	257
2626-01	257
2626-06	257
2626-08	257
2627-00	258
2627-01	258
2627-06	258
2627-08	258
2628-00	258
2628-01	258
2628-06	258
2628-08	258
2633-00	260
2633-01	260
2633-06	260
2633-08	260
2636-00	261
2636-01	261
2636-06	261
2636-08	261
2637-00	261

22

2637-01	261
2637-06	261
2637-08	261
2638-00	261
2638-01	261
2638-06	261
2638-08	261
2640-00	260
2640-01	260
2640-06	260
2640-08	260
2642-00	260
2643-00	260
2643-01	260
2643-06	260
2643-08	260
2644-00	260
2644-01	260
2644-06	260
2644-08	260
2648-00	262
2648-01	262
2648-06	262
2648-08	262
2649-00	262
2649-01	262
2649-06	262
2649-08	262
2650-00	262
2650-01	262
2650-06	262
2650-08	262
2651-00	262
2651-01	262
2651-06	262
2651-08	262
2652-00	263
2652-01	263
2652-06	263
2652-08	263
2653-00	263
2653-01	263
2653-06	263
2653-08	263
2654-00	263
2654-01	263
2654-06	263
2654-08	263
2655-00	263

23

2655-01	263
2655-06	263
2655-08	263
2656-00	263
2656-01	263
2656-06	263
2656-08	263
2657-00	264
2657-01	264
2657-06	264
2657-08	264
2658-00	264
2658-01	264
2658-06	264
2658-08	264
2659-00	262
2659-01	262
2659-06	262
2659-08	262
2660-00	263
2660-01	263
2660-06	263
2660-08	263
2661-00	263
2661-01	263
2661-06	263
2661-08	263
2662-00	263
2662-01	263
2662-06	263
2662-08	263
2666-00	261
2666-01	261
2666-06	261
2666-08	261
2671-00	265
2671-01	265
2671-06	265
2671-08	265
2671-61	266
2671-62	266
2671-67	266
2672-00	265
2672-01	265
2672-06	265
2672-08	265
2672-61	266
2672-62	266
2672-67	266

24

2673-00	265
2673-01	265
2673-06	265
2673-08	265
2673-61	266
2673-62	266
2673-67	266
2674-00	265
2674-01	265
2674-06	265
2674-08	265
2675-00	265
2675-01	265
2675-06	265
2675-08	265
2686-00	263
2686-01	263
2686-06	263
2686-08	263
2687-00	263
2687-01	263
2687-06	263
2687-08	263
2700-02	170
2701-00	153
2701-01	163
2702-00	153
2703-00	153
2703-01	163
2703-02	170
2704-00	154
2705-00	154
2705-01	164
2705-02	171
2706-00	154
2707-00	155
2707-01	164
2707-02	171
2708-00	155
2709-00	155
2710-00	156
2711-00	156
2711-01	165
2711-02	171
2712-00	156
2712-01	165
2713-00	157
2714-00	157
2716-00	158

INDEX LIST

25

2716-01	165
2716-02	172
2717-00	158
2717-01	166
2717-03	157
2718-00	158
2718-01	166
2719-00	159
2719-01	166
2720-00	159
2720-01	167
2721-00	159
2721-01	167
2721-02	172
2722-00	160
2722-02	172
2723-00	160
2723-01	167
2723-02	173
2724-00	160
2724-01	168
2724-02	173
2725-00	161
2725-01	168
2726-00	161
2726-01	168
2727-00	161
2727-01	169
2728-02	170
2749-00	162
2750-00	162
2751-00	162
2752-00	162
2753-00	174, 176
2753-01	174
2753-02	174
2754-00	174
2754-01	174
2754-02	174
2755-00	174
2755-01	174
2755-02	174
3010-00	270
3010-06	270
3010-08	270
3011-00	270
3011-06	270
3011-08	270
3012-00	270

26

3012-06	270
3012-08	270
3013-00	271
3013-06	271
3013-08	271
3014-00	271
3014-06	271
3014-08	271
3015-00	272
3015-06	272
3015-08	272
3018-00	271
3018-06	271
3018-08	271
3023-00	270
3023-06	270
3023-08	270
3024-00	270
3024-06	270
3024-08	270
3025-00	271
3025-06	271
3025-08	271
3026-00	271
3026-06	271
3026-08	271
3027-00	272
3027-06	272
3027-08	272
3028-00	272
3028-06	272
3028-08	272
3031-00	273
3031-06	273
3031-08	273
3033-00	273
3033-06	273
3033-08	273
3035-00	274
3035-06	274
3035-08	274
3036-00	273
3036-06	273
3036-08	273
3041-00	274
3041-06	274
3041-08	274
3043-00	273
3043-06	273

27

3043-08	273
3044-00	273
3044-06	273
3044-08	273
3071-00	275
3071-06	275
3071-08	275
3072-00	275
3072-06	275
3072-08	275
3073-00	275
3073-06	275
3073-08	275
3087-00	274
3087-06	274
3087-08	274
3207-00	228
3207-06	228
3207-09	228
3210-00	226
3210-06	226
3210-09	226
3211-00	226
3211-06	226
3211-09	226
3212-00	226
3212-06	226
3212-09	226
3213-00	227
3213-06	227
3213-09	227
3214-00	227
3214-06	227
3215-00	228
3215-06	228
3215-09	228
3216-00	227
3216-06	227
3216-09	227
3218-00	227
3218-06	227
3218-09	227
3223-00	226
3223-06	226
3223-09	226
3224-00	226
3224-06	226
3224-09	226

28

3225-00	227
3225-06	227
3225-09	227
3234-10	229
3234-16	229
3234-19	229
3235-00	229
3235-06	229
3235-09	229
3236-10	229
3236-16	229
3236-19	229
3243-00	229
3243-06	229
3243-09	229
3243-10	229
3243-16	229
3243-19	229
3248-10	230
3248-16	230
3248-19	230
3249-10	230
3249-16	230
3249-19	230
3253-10	230
3253-16	230
3253-19	230
3257-10	231
3257-16	231
3257-19	231
3258-10	231
3258-16	231
3258-19	231
3260-10	230
3260-16	230
3260-19	230
3270-10	228
3270-16	228
3270-19	228
3271-00	232
3271-02	232
3271-03	232
3271-06	232
3271-09	232
3271-61	233
3271-62	233
3271-63	233
3271-72	233
3272-00	232

29

3272-02	232
3272-03	232
3272-06	232
3272-09	232
3272-61	233
3272-62	233
3272-63	233
3272-72	233
3273-00	232
3273-02	232
3273-03	232
3273-06	232
3273-09	232
3273-61	233
3273-62	233
3273-63	233
3273-72	233
3274-00	232
3274-02	232
3274-03	232
3274-06	232
3274-09	232
3274-61	233
3274-62	233
3274-63	233
3274-72	233
3286-10	230
3286-16	230
3286-19	230
3287-10	231
3287-16	231
3287-19	231
3288-00	231
3288-06	231
3288-09	231
3301-00	115
3313-00	134
3600-10	54
3600-11	54
3600-12	54
3600-27	54
3600-46	54
3605-00	52
3605-20	52
3606-00	52
3606-20	52
3615-00	53
3615-20	53
3616-00	53

30

3616-20	53
3710-00	218
3711-00	218
3712-00	218
3713-00	218
3714-00	218
3715-00	218
3733-00	219
3737-00	219
3738-00	219
3740-00	219
3743-00	219
3744-00	219
4001-00	37
4001-11	39
4002-00	37
4002-11	39
4003-00	37
4003-11	39
4004-00	37
4004-11	39
4005-00	38
4005-11	40
4006-00	38
4006-11	40
4007-00	38
4007-11	40
6200-00	103
6200-01	103
6200-02	103
6200-03	103
6211-00	99
6212-00	100
6213-00	100
6213-10	100
6214-00	99
6214-10	99
6215-00	99
6216-00	100
6216-10	100
6216-20	100
6221-00	94
6222-00	94
6223-00	94
6224-00	98
6225-00	98
6226-00	98
6227-00	98
6228-00	98

INDEX LIST

31

6231-00	94
6232-00	94
6240-00	95
6240-01	95
6241-00	95
6242-00	95
6243-00	95
6244-00	95
6250-00	97
6250-01	97
6251-00	96
6256-00	96
6257-00	96
6258-00	96
6259-10	96
6261-00	97
6262-00	97
6263-00	97
6264-00	97
6271-00	101
6271-20	102
6272-00	101
6272-20	102
6273-00	101
6273-20	102
6274-00	101
6274-20	102
6275-00	101
6275-20	102
6276-00	101
6276-20	102
7000-10	104
7001-10	104
7002-10	104
7010-10	104
7011-10	104
7012-10	104
09446-00	115
09447-00	115
09448-00	115
09460-00	118
09461-00	118
09462-00	118
09463-00	118
09464-00	118
09465-00	117
09466-00	117
09467-00	117
09468-00	117

32

9469-00	117
020502-00	134
020902-00	134
024003-00	115
028402-00	135
028402-01	135
028403-00	135
028403-01	135
028404-00	134
142828	8
142830	8
142831	8
143603-00	241
148103-00	240
167596	7
173603-00	286
178898	31
178899	31
178900	31
178901	31
178902	31
178903	32
178904	32
178905	32
190410-00	75
194690	7
194691	7
194694	7
194819	6
194821	6
194822	6
194823	6
194829	6
194831	6
194832	6
194833	6
194881	6
194882	6
194883	6
194891	6
194892	6
194893	6
195121	7
195122	7
195123	7
235776	7
263603-00	261
3040115	133
L	

33

LK-713L	8
W	
WI001490	114
WI008017	114
WI008048	114
WI008116	114
WI008130	114
WI008147	114
WI014919	114
WI080112	114
WI080129	114
WI080136	114
WI080419	114
WI080426	114
WI080433	114
WI081119	114
WI081133	114
WI081140	114
WI081317	114
WI081331	114
WI081348	114
WI081423	114
WI081454	114
WI081461	114
X	
X100034	105
X100058	105
X100096	105
X100119	105
X100256	106
X100270	106
X100300	106
X100324	106
X100454	105
X100461	105
X100485	105
X100492	105
X1149290	107
X1419190	107
X1473292	107
X1479291	92, 107
X1519100	108
X1519140	108
X1519150	108
X1579202	108
X1579242	108
X1579252	108
XD31S20	106
XK31S20	106

34

XK53S53	105
XS31S20	106
XS53S35	105

